UNITED STATES GOVERNMENT MEMORANDUM

December 11, 2019

To: Public Information (MS 5030)

From: Plan Coordinator, FO, Plans Section (MS

5231)

Subject: Public Information copy of plan

Control # - N-10090

Type - Initial Development Operations Coordinations Document

Lease(s) - OCS-G00981 Block - 237 Eugene Island Area
OCS-G10741 Block - 253 Eugene Island Area

OCS-G36207 Block - 254 Eugene Island Area

Operator - Arena Offshore, LP

Description - Wells K012 & K013 (EI 254), sidetrack drilling of Wells K001, K006 & K009 (EI253) & Wells K002-K005, K007, K008,

K010 &

Jackup

Attached is a copy of the subject plan.

It has been deemed submitted as of this date and is under review for approval.

Chiquita Hill Plan Coordinator

Site Type/Name	Botm Lse/Area/Blk	Surface Location	Surf Lse/Area/Blk
FIXED/K		559 FSL, 7120 FEL	G00981/EI/237
WELL/K001	G10741/EI/253	549 FSL, 7135 FEL	G00981/EI/237
WELL/K002	G00981/EI/237	549 FSL, 7128 FEL	G00981/EI/237
WELL/K003	G00981/EI/237	549 FSL, 7120 FEL	G00981/EI/237
WELL/K004	G00981/EI/237	566 FSL, 7135 FEL	G00981/EI/237
WELL/K005	G00981/EI/237	560 FSL, 7135 FEL	G00981/EI/237
WELL/K006	G10741/EI/253	554 FSL, 7135 FEL	G00981/EI/237
WELL/K007	G00981/EI/237	566 FSL, 7128 FEL	G00981/EI/237
WELL/K008	G00981/EI/237	566 FSL, 7120 FEL	G00981/EI/237
WELL/K009	G10741/EI/253	554 FSL, 7128 FEL	G00981/EI/237
WELL/K010	G00981/EI/237	560 FSL, 7128 FEL	G00981/EI/237
WELL/K011	G00981/EI/237	560 FSL, 7120 FEL	G00981/EI/237

October 30, 2019

U.S. Department of the Interior Bureau of Ocean Energy Management Gulf of Mexico OCS Region 1201 Elmwood Park Boulevard New Orleans, Louisiana 70123-2394

Attention: Michelle Uli-Picou

Plans Section



Arena Offshore, LP 4200 Research Forest Dr. Suite 230 The Woodlands, TX 77381 281-681-9501

281-681-9502 Fax

RE: Joint Initial and Revised Development Operations Coordination Document for Leases OCS-G 00981/G 10741/G 36207, Eugene Island Blocks 237/253/254, OCS Federal Waters, Gulf of Mexico, Offshore, Louisiana

Ms. Picou:

In accordance with the provisions of Title 30 CFR 550, Subpart B and those certain Notice to Lessees (NTL) 2008-G04 and 2009-G27, Arena Offshore, LP (Arena) hereby submits for your review and approval a Joint Initial and Revised Development Operations Coordination Document (Plan) for Leases OCS-G 00981/G 10741/G 36207, Eugene Island Blocks 237/253/254, Offshore, Louisiana.

Enclosed are two Proprietary and Public Information copies (one hard copy and one CD of each) of the Plan.

The required Pay.Gov fee associated with this proposed activity was included in the original proprietary copy of this Plan.

Contingent upon receiving regulatory approvals, Arena is scheduled to commence activities under this Plan as early as February 1, 2020.

Should you have any questions concerning this matter or require additional information, please contact the undersigned at <u>aimee@arenaoffshore.com</u> or 281-210-3180, or Teri Halverson at <u>thalverson@arenaoffshore.com</u> or 281-210-0354.

Sincerely,

Jan K. Chas

*f*ena Offshore, LP

Aimee P. Deady

Regulatory Manager



Arena Offshore, LP 4200 Research Forest Drive, Suite 230 The Woodlands, Texas 77381

Joint Initial and Revised Development Operations Coordination Document

Eugene Island Blocks 237/253/254 (Leases OCS-G00981/G10741/G36207)

Aimee Deady
Arena Offshore, LP
4200 Research Forest Drive, Suite 230
The Woodlands, Texas 77381
281-210-3180
aimee@arenaoffshore.com

October 2019

Public Information

Amendments

Dated	Section	Comments	Amended Pages

TABLE OF CONTENTS

\triangleright	Section 1	
	o Plan	Contents Page 8
	-	Plan Contents
	-	Description and Objective
	•	Plan Information Form
	•	Location
	•	Safety and Pollution Prevention Features
	•	Storage Tanks & Production Vessels
	•	Pollution Prevention Measures
	•	Additional Safety and Pollution Prevention Measures
	Section 2	
	o Gene	ral InformationPage 11
	•	Applications and Permits
	•	Drilling Fluids
	•	Production
	•	Oil Characteristics
	•	New or Unusual Technology
	•	Bonding Statement
	•	Oil Spill Financial Responsibility
	•	Deepwater Control statement
	•	Suspension of Production
	•	Blow out Scenario
	•	Chemical Products
	Section 3	
	o Geol	ogical & GeophysicalPage 17
	•	Geological Description
	•	Structure Contour Maps
	•	Interpreted 3-D Seismic Lines
	•	Geological Structure Cross Sections
	•	Shallow Hazards Report
	-	Shallow Hazards Assessment
	<u> </u>	High Resolutions Seismic Lines
	<u> </u>	Stratigraphic Column
	-	Time vs. Depth Table
	•	Geochemical Information
_		Future G&G Activities
	Section 4	nama Svili da Cimarifia etian
	○ Hyar	ogen Sulfide Classification
	_	Hydrogen Sulfide Classification
	-	Hydrogen Sulfide Contingency Plan
	-	Hydrogen Sulfide Contingency Plan Hydrogen Sulfide Modeling Report
	_	Try at ogott outlide modelling report

TABLE OF CONTENTS - CONT'D

×	Section 5	
	o Mine	eral Resource Conservation InformationPage 20
	•	Technology and Reservoir Engineering Practices and Procedures
	•	Technology and Recovery Practices and Procedures
	•	Reservoir Development
	Section 6	-
	o Biolo	ogical, Physical, Socioeconomic InformationPage 21
	•	High Density Deepwater Benthic Communities
	-	Topographic Features Map
		Topographic Features Statement (Shunting)
	-	Live Bottoms (Pinnacle Trend) Map
		Live Bottoms (Low Relief) Map
	•	Potentially Sensitive Biological Features Map
		Threatened or Endangered Species, Critical Habitat, and Marine
		Mammal Information
		Archaeological Report
	•	Air and Water Quality Information
	•	Socioeconomic Information
	Section 7	
	o Was i	te and Discharge InformationPage 25
	•	Projected Generated Wastes
	•	Projected Ocean Discharges
	•	Modeling Reports
		NPDES Permits
		Cooling Water Intakes
	Section 8	
	o Air E	Emissions InformationPage 26
	•	Emissions Worksheets
	•	Screening Questions
	•	Emissions Reduction Measures
	•	Verification of Non-Default Emission Factors
	•	Non-Exempt Activities
,	~	Modeling Report
>	Section 9	n 111 T C
	o Oil S	Spills InformationPage 27
	_	Oil Spill Response Planning
	<u>•</u>	Oil Spill Response Discussion
	•	Modeling Report
	•	NTL 2015-N01

TABLE OF CONTENTS-CONT'D

>	Section 10
	o Environmental Monitoring InformationPage 30
	 Monitoring Systems
	 Incidental Takes
	 Flower Gardens Banks
\triangleright	Section 11
	 Lease Stipulations & Special Conditions InformationPage 31
	 Marine Protected Species
	 Military Warning Area
	 Special Conditions
\triangleright	Section 12
	o Environmental Mitigation Measures InformationPage 33
	 Measures Taken to Avoid, Minimize, and Mitigate Impacts
	 Incidental Takes
>	Section 13
	o Decommissioning InformationPage 34
>	Section 14
	o Related Facilities & Operations InformationPage 35
	 Related OCS Facilities and Operations
	 Transportation System
	 Produced Liquid Hydrocarbon Transportation Vessels
>	Section 15
	 Support Vessels and Aircraft InformationPage 36
	General
	 Diesel Oil Supply Vessels
	 Drilling Fluid Transportation
	 Solid & Liquid Waste Transportation
	 Vicinity Map
	Section 16
	Onshore Support Facilities InformationPage 38
	 General
	 Support Base Construction or Expansion
	 Support Base Construction or Expansion Timetable
	Waste Disposal
	Air Emissions
	 Unusual Solid and Liquid Wastes
\triangleright	Section 17
	o Sulphur Operations InformationPage 39
	Bleedwater
	 Subsidence
>	Section 18
	o Coastal Zone Management InformationPage 40
	 Consistency Certification
	Other Information
1 202	Offshore ID
AIGH	a Offshore, LP October 30, 2019

Page 5

Eugene Island Blocks 237/253/254

TABLE OF CONTENTS-CONT'D

> S	Section 19	
	o Environmental Impact Analysis	Page 41
	 Environmental Impact Analysis 	_
	 Impacts on Proposed Activities 	
	 Environmental Hazards 	
	Alternatives	
	 Mitigation Measures 	
	 Consultation 	
	Preparer	
	References	
> s	Section 20	
	o Administrative Information	Page 55
	 Exempted Information for Public Information Copies 	· ·
	Bibliography	

Attachments

Data	Attachment
OCS Plans Form	A
Well Location Plat	В
Bathymetry Map	c
Geological Description	D
Structure Contour Maps	E
Interpreted 2-D and/or Seismic Lines	F
Geological Structure Cross-Sections	G
Stratigraphic Column	н
NOAA Endangered Species List	I
Generated Waste and Discharge Tables	J
Projected Air Emissions Report	к
Oil Spill Response Discussion	L
Worst Case Discharge Scenario Data (NTL 2015-N01)	М
Platform Elevation View Drawing	N
Vicinity Plat	О
Coastal Zone Consistency Certification	P

Section 1 - Plan Contents (30 CFR Part 550.241)

Lease OCS-G 00981, Eugene Island Block 237 is comprised of all of the subject block. Lease OCS-G 10741, Eugene Island Block 253 is comprised of all of the subject block; less and except the W/2SW/4NW/4. Lease OCS-G 36207 is comprised of all of the subject block. Eugene Island Blocks 237/253 are maintained by ongoing production operations, and Eugene Island Block 254 is within the primary term of the lease.

Effective October 4, 2016 Arena Offshore, LP (Arena) was designated operator of Leases OCS-G 00981/G 10741; and subsequently approved as record title interest holder via approved Oil and Gas Lease Assignments. Lease OCS-G 36207 was acquired at Lease Sale 250 on March 21, 2018 by Arena Energy, LP and Arena Offshore, LP designated operator on July 1, 2018.

Leases OCS-G 00981/10741, Eugene Island Blocks 237/253 have been jointly developed by installation of Platforms J and K in Eugene Island Block 237 during 1983 and 1994, respectively.

Under previously approved Development Operations Coordination Documents (DOCD's) the subject platforms were installed, along with the respective Wells No. J001 through J006 and Wells No. K001 through K011 drilled, completed and produced from these same structures installed in Eugene Island Block 253; with bottomhole locations in both Eugene Island Blocks 237/253.

- Initial Development Operations Coordination Document in 1994 for Platform K and Wells No. K001 through K006 (Control No. N-4838)
- Supplemental Development Operations Coordination Document in 1996 for Well No. K007 (Control No. S-3946)
- Supplemental Development Operations Coordination Document in 2000 for Wells No. K008 through K012 (Control No. S-5126)
- Supplemental Development Operations Coordination Document in 2001 for Wells No. J007 through J010 (Control No. S-5667)
- Joint Initial/Supplemental Development Operations Coordination Document in 2017 for Wells K001 through K013, to be drilled, sidetrack drilled, completed and produced from Leases OCS-G 00981/G 10741/G 35785, Eugene Island Blocks 237/253/254 (Control No. N-9980)

This DOCD is being submitted to account for a Lease No. change of Eugene Island Block 254. The previously filed DOCD approval was for Lease OCS-G 35785 and we've since acquired the new lease no. Lease OCS-G 36207. All information submitted from the 2017 Initial/Supplemental approval (N-9980) stays the same for the Eugene Island Blocks 237 (surface location) and 253 blocks, and only "bringing forward" for consistency. All applicable documents that had the old Lease No. for Eugene Island Block 254 have been changed.

Section 1 - Plan Contents (30 CFR Part 550.241)

Arena will utilize either White Fleet Drilling 250/300/ or 350 with surface BOP's to conduct the above proposed operations and is scheduled to arrive on location on or before February 1, 2020.

A. Plan Information Form

Included as **Attachment A** is Form BOEM 137 "OCS Plan Information Form" which provides information concerning the activities proposed under this Plan.

B. Location

Included as **Attachment B** is a location plat detailing the existing surface and proposed bottomhole locations as required by NTL 2008-G04.

A bathymetry map detailing the Eugene Island Block 237 K Platform surface location for the activity proposed in this Plan was submitted in Plan Control No. N-9980. No anchor handling vessel will be required for these operations.

C. Safety and Pollution Prevention Features

Safety of personnel and protection of the environment during the proposed operations is of primary concern with Arena, and mandates regulatory compliance with the contractors and vendors associated with the proposed operations as follows:

The offices of the Bureau of Ocean Energy Management (BOEM) and Bureau of Safety and Environmental Enforcement (BSEE) mandate the operations in this Plan comply with well control, pollution prevention, construction, welding procedures, safety and environmental related issue, et al; as described in various Subparts of Titles 30 CFR Parts 250 and 550; and as further clarified by applicable Notices to Lessees (NTL's). BSEE conducts periodic announced and unannounced onsite inspections of offshore facilities to confirm operators are complying with lease stipulations, operating regulations, approved plans, and other conditions; as well as to assure safety and pollution prevention requirements are being met. The National Potential Incident of Noncompliance (PINC) List serves as the baseline for these inspections.

- U. S. Coast Guard regulations contained in Title 33 CFR mandate the appropriate life rafts, life jackets, ring buoys, etc., be maintained on the facility at all times.
- U. S. Environmental Protection Agency regulations contained in the NPDES General Permit GMG290000 mandate that supervisory and certain designated personnel onboard the facility be familiar with the effluent limitations and guidelines for overboard discharges into the receiving waters.

Arena Offshore, LP Eugene Island Blocks 237/253/254

Section 1 - Plan Contents (30 CFR Part 550.241)

Arena's activities in this Plan will comply with the existing regulations and NTL's implemented by the above listed agencies.

D. Storage Tanks and Production Vessels

The following table details the storage tanks and/or production vessels that will store oil (capacity greater than 25 bbls. or more) and be used to support the proposed activities:

Type of Storage Tank	Type of Facility	Tank Capacity (bbls)	Number of Tanks	Total Capacity (bbls)	Fluid Gravity (API)
Fuel Oil	MODU	700	4	2800	No. 2 Diesel
Production	Platform K	NA	NA	NA	NA

E. Pollution Prevention Measures

Additional measures initiated by Arena beyond those measures required by Title 30 CFR Part 250 may include any and/or all of the following:

- A preliminary facility inspection by a contractor to ensure facility meets current regulatory requirements prior to commencement of operations
- Obtain historical performance history of the drill rig and/or production facility (if applicable).

F. Additional Measures

- Obtain historical performance history of the drilling and/or production contractor (if applicable).
- Safety and Environmental Briefings with offshore employee and contractor personnel to facility orientation and briefings on current operations.
- Review of Oil Spill Response Plan to ensure personnel are aware of the initial notifications and reporting requirements.
- Review of EPA NPDES General Permit with applicable personnel to ensure awareness of permit effluent limitations and reporting requirements.
- Pre-Spud and/or Pre-Production Start-Up Meetings with field personnel and contractors to discuss regulatory, environmental issues.
- SEMS Contractor Evaluations
- Safety Orientation Meetings
- Job Safety Analyses
- Management of Change Process

A. Application and Permits

The following Federal/State applications will be submitted for the activities provided for in this Plan exclusive of EPA and COE general permits.

Application/Permit	Issuing Agency	Status
Applications for Permit to Sidetrack	BSEE District	Pending
Applications for Permit to Drill	BSEE District	Pending
Rig Move Reports	USCG and NGA	Pending
Surface Safety System Modification	BSEE District	Pending
Commingling/Measurement Application	BSEE Regional	Pending

B. Drilling Fluids

Arena plans to use the following drilling fluids for the operations proposed under this Plan:

Drilling Fluid Type	Estimated Volume of Drilling Fluid to be used Per Well	
Water-based (seawater, freshwater, barite)	4000 bbls	
Synthetic-based (internal, olefin, ester)	1700 bbls	

C. Production

Arena estimates the combined life of reserves for the proposed development activity to as follows:

Hydrocarbon Type	Peak Production Rate	Average Production Rate	Life of Reservoir

D. Oils Characteristics

According to NTL 2008-G04, oil characteristics information is not required for the proposed activities addressed in this Plan.

E. New or Unusual Technology

Arena does not plan or anticipate using any new or unusual technology as defined in Title 30 CFR 250.200 during the proposed activities addressed in this Plan. However, the best available and safest technologies (BAST), as currently referenced in Title 30 CFR Part 250 will be incorporated as a standard operational procedure.

F. Bonding Statement

The general bond requirements for the activities and facilities proposed in this Plan are satisfied by an Areawide Development Bond, furnished and maintained according to Title 30 CFR Part 556, Subpart I; NTL No. 2015-N04, "General Financial Assurance". Additional decommissioning liability assessments are currently under review per the recently issued NTL 2016-N01 "Requiring Additional Security". Arena is currently in the process of reviewing all lease, right of use and easements, and right-of-way pipelines for any associated disputes on ownership issues associated with BOEM's data; as well as decommissioning liability assessments by BSEE. Arena will continue to coordinate and respond to remaining deadlines detailed in this same NTL. Additionally, BOEM has recently changed an internal policy and will no longer require additional security prior to the approval of Exploration and Development Plans; and will assess same at the actual well permitting phase.

G. Oil Spill Financial Responsibility (OSFR)

According to Title 30 CFR Part 553, and NTL 2008-N05, "Guidelines for Oil Spill Financial Responsibility for Covered Facilities."; Arena Offshore, LP (Company No. 02628) will ensure demonstration of oil spill financial responsibility for the operations proposed in this Plan prior to commencing operations.

H. Deepwater Well Control Statement

According to NTL 2008-G04, a deepwater well control statement is not required for the activities proposed in this Plan.

I. Suspensions of Production

Arena does not anticipate a need to file a suspension of production for the subject leases since they are either being maintained by ongoing production operations or within the primary term.

J. Blowout Scenario

Arena will drill to the objective sands outlined in Geological and Geophysical Section of this Plan utilizing a typical structural, conductor, surface and production casing program. If mandated by wellbore conditions, an intermediate casing string will be set prior to drilling through the objective sands. In the event of a blowout during the course of drilling open hole in the objective sands, Arena anticipates a rate of 20,584 BOPD with an anticipated gravity of 34°. The KL Prospect wellbore would most likely bridge over in less than 1 day. Arena would immediately activate its Regional Oil Spill Response Plan and Spill Management Team to initiate potential recovery of liquid hydrocarbons on the receiving water and review potential well intervention options. In the event a relief well is initiated, Arena does not anticipate any delays in acquiring a jack-up type rig to conduct the proposed operations. Dependent upon the interval the well was drilled to, and potential interval for bridging over and surface intervention; if required, it could take at least 14 days to mobilize equipment and/or a rig to the field and perform a surface intervention or drill the relief well. Based on well intervention outlined in the potential worse-case discharge scenarios, the potential for drilling a relief well and a rig not being immediately available would be a total of 55 days and a potential total of 1,132,120 barrels during that time span.

- Case 1: **Bridging Over** All of the sands that will be encountered in the Eugene Island Block 254, KL Prospect wellbore are unconsolidated. Productive zones require gravel packs for sand control. All offset D-2 Sand completions were gravel packed. It is anticipated that the severe drawdown resulting from a loss of well control will result in the hole bridging over in a matter of hours (Less than 1 day)
- Case 2: **Conventional Surface Intervention** It is assumed that a loss of well control from the surface will result in mobilizing 3rd party well control equipment to the rig. It is assumed that the BOP's are compromised, that the rig has not caught fire and is capable of supporting well control efforts with the assistance of a support vessel. As an example, the intervention would consist of top killing the well with kill weight mud or possibly replacing BOP's with another set to contain flow from the breached equipment. (Approximately 14 days)

- Case 3: **Relief Well Intervention** It is assumed that a rig is immediately available to mobilize to location to commence drilling a relief well. The mobilization and estimated time to drill the relief well is based on offset drilling performance. (Approximately 45 days)
- Case 4: **Relief Well Intervention** It is assumed that a rig is not immediately available to mobilize to location to commence drilling a relief well. The estimated mobilization time of a rig to location incorporates the suspension of activities by an Operator before the rig can be released for relief well operations. The time to drill the relief well is based on offset drilling performance curves.

Well Bridging: < 1 day
Surface Intervention: 14 days
Relief Well Intervention (Case 3) 45 days
Relief Well Intervention (Case 4): 55 days

Relief Rig Availability:

There are currently seven (7) independent or mat cantilever jack up rigs currently marketed in the Gulf of Mexico that are capable of drilling an open water relief well to the Eugene Island Block 237 K Platform.

Should the jack-up rig be damaged during the initial loss of well control, there are no offset platforms in the area that would be able capable of utilizing a platform rig to reach the bottomhole locations of the subject wellbores.

Arena does not anticipate any rig package constraints for this project.

Blowout Prevention Measures

The purpose of this document is to describe measures that Arena will take, above and beyond what is detailed in BSEE Title 30 CFR Part 250, to enhance its ability to prevent a blowout, to reduce the likelihood of a blowout, and conduct effective and early intervention in the event of a blowout on the proposed well locations.

The following measures will be taken in attempt to ensure the proposed well locations are kept under control at all times:

- An Arena onsite representative will witness and review all BOP tests, casing tests and formation integrity tests.
- An Arena Superintendent in the office will review all FIT tests prior to moving forward with drilling operations

Arena Offshore, LP Eugene Island Blocks 237/253/254

- Prior to commencing cementing operations on any casing string, a minimum of 1½ bottoms up will be circulated with drilling mud, so long as full returns are maintained, in order enhance the ability of achieving a successful cement job.
- A liner top packer, in addition to cement, will be utilized in order to ensure the pressure integrity of the liner lap of any liner run in the well.
- All production casing strings will be centralized across hydrocarbon bearing zones in order to ensure the proper isolation of individual pay sands by cementation and to prevent the transmission of hydrocarbons up the annulus behind the production casing.
- The proposed well will be drilled on a mud weight schedule utilizing extensive offset data from offset wells in the field. Proposed drilling mud weights will allow for at a minimum, the known hydrostatic pressures required to drill the known hydrocarbon zones encountered in the original development of the field.
- Lost circulation material in the form of properly distributed particle sized mud additives (PSDs) will be added to the mud system in the form of sweeps while drilling both the intermediate and production hole sections. PSD additives will be utilized to prevent uncontrolled mud losses in the case that lower than anticipated pore pressures or fracture gradients are encountered.
- Wiper trips will be performed as hole conditions dictate in order to quantify the stability of the wellbore and determine if sufficient mud weights are being utilized to prevent influx of formation fluids, prevent swabbing of wellbore fluids while pulling pipe and prevent losses of wellbore fluids to the formation.
- Connections will be simulated while drilling into pressure transition areas in order to properly assess the current wellbore conditions.
- Mudloggers will be utilized during the drilling of the well in order to specifically
 evaluate wellbore conditions including, but not limited to weights of returning
 drilling fluids as compared to that of the fluid entering the hole, gas content of
 mud returns, formation characteristics and abnormalities of cuttings and
 estimated paleo aging of cuttings.
- Logging while drilling tools (LWD) will be utilized to evaluate and estimate lithology, formation pressures and fluid content from surface casing point to wellbore total depth. This will enable the real time identification of any changes in anticipated formation pressures and assist in the picking of intermediate casing points and wellbore total depth, potentially eliminating the possibility of drilling into unexpected formations that could cause dangerous well control situations. Log data will be regularly provided to the office for evaluation.
- Pressure While Drilling (PWD) data will be utilized to ensure the stability of, and to maintain constant monitoring of hydrostatic pressures applied to, the wellbore.

Blowout Intervention

In the event of an uncontrolled flow of hydrocarbons from the Eugene Island Block 254 Well KL Prospect, the Regional Oil Spill Response Plan (OSRP) as described in this Plan will be activated. In addition to the activation of this Plan, two scenarios of well intervention have been described in the attached documentation and current availability of equipment to enact both well intervention scenarios identified:

- Assuming in an uncontrolled flow situation, the MODU is intact and not sufficiently damaged, along with the KL Prospect wellbore and surface equipment, wellbore intervention would be performed from the MODU itself, or a barge mobilized nearby. Master Service Agreements (MSAs) have been established with Cudd Pressure Control and Wild Well Control in order to expedite response in the case of an uncontrolled flow situation. As an example, flow could be controlled from either a "top kill" method or from the removal of the surface BOP stack and subsequent replacement of the stack and the wellbore shut in.
- In the event that the MODU and/or the wellbore is irreparably damaged during a blowout scenario, wellbore intervention would be performed by contracting an additional MODU, mobilizing it to location and the subsequent spudding and drilling of a relief well. Arena currently has in place established contracts with all contractors that operate jack-up rigs in the Gulf of Mexico. Such contracts would be utilized to expedite the contracting of a rig in order to drill a relief well.

In the case of an uncontrolled flow of hydrocarbons, Arena would simultaneously pursue multiple wellbore intervention methods in an attempt to mitigate and terminate the spill, until the wellbore is brought under control.

K. Chemical Products

According to NTL 2008-G04 information regarding products is not required to accompany EP's and DOCD's in the Gulf of Mexico.

Section 3 - Geological & Geophysical Information (30 CFR Part 550.244)

A. Geological Description

Included as **Attachment C** are the details of the geological targets and associated trapping features for the proposed well locations.

B. Structure Contour Maps

Included as Attachment D are current structure maps depicting the proposed bottomhole locations and applicable geological cross sections for the proposed well locations.

C. Interpreted 2-D and/or Seismic Lines

Included as **Attachment E** are deep seismic lines depicting the proposed well locations.

D. Geological Structure Cross-Sections

Interpreted geological cross sections depicting the proposed well locations and depths are included **Attachment F.**

E. Shallow Hazards Report

The activities proposed in this Plan will be conducted from the existing Eugene Island Block 237 K Platform (Plan Control No. N-4838), and therefore does not require an additional shallow hazards survey and report.

F. Shallow Hazards Assessment

The activities proposed in this Plan will be conducted from the existing Eugene Island Block 237 K Platform (Plan Control No. N-4838), and therefore does not require additional shallow hazards assessment.

G. High Resolution Seismic Lines

The activities proposed in this Plan will be conducted from the existing Eugene Island Block 237 K Platform (Plan Control No. N-4838), and therefore does not require additional high resolution seismic lines.

Section 3 - Geological & Geophysical Information (30 CFR Part 550.244)

H. Stratigraphic Column

Included as **Attachment G** are generalized biostratigraphic/lithostratigraphic columns depicting the proposed well locations from the seafloor to total depth with each objective horizon labeled.

I. Time vs. Depth Tables

Arena feels there is sufficient well control data for the target sand objectives provided for in this Plan; as such seismic time vs. depth tables are not required.

J. Geochemical Information

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

K. Future G&G Activities

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Section 4 - Hydrogen Sulfide Information (30 CFR Part 550.245)

A. Concentration

Arena does not anticipate encountering H2S above the 20 ppm atmospheric level while conducting the proposed development operations provided under this Plan as detailed on *Attachment C.*

B. Classification

In accordance with Title 30 CFR 250.490(c), Arena has received a classification of "H2S absent" per Plan Control No. N-9980. This Initial DOCD is only to account for a Lease OCS-G No. change to Eugene Island Block 254; no changes to the surface or other bottomhole locations have been altered from previously approved Plan Control No. N-9980.

C. H2S Contingency Plan

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

D. Modeling Report

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Section 5 - Mineral Resource Conservation Information (30 CFR Part 550.246)

A. Technology and Reservoir Engineering Practices and Procedures

Proprietary Information

B. Technology and Recovery Practices and Procedures

Proprietary Information

C. Reservoir Development

Proprietary Information

A. High Density Deepwater Benthic Communities Information

NTL 2009-G40 broadened the scope of a chemosynthetic communities report to cover all high density deepwater benthic communities, changed the definition of deepwater from 400 meters (1312 feet) to 300 meters (984 feet), increased the separation distance from muds and cuttings discharge locations from 1500 feet to 200 feet, and provided for an additional 1000 feet buffer area beyond the maximum anchor areas.

The activities proposed in this Plan do not disturb seafloor areas in water depths greater than 300 meters (984 feet); therefore chemosynthetic information is not required.

B. Topographic Features Map

BOEM and the National Marine Fisheries Service (NMFS) have entered into a programmatic consultation agreement for Essential Fish Habitat that requires that no bottom disturbing activities (including rig placement, and rig or construction base use of anchors, chains, cables, and wire ropes) within 305 meters (1000 feet) of a "No-Activity Zone" of a topographic feature.

If such proposed bottom disturbing activities are within 1000 feet of a no activity zone, the BOEM is required to consult with the NMFS.

The activities proposed in this Plan are not affected by a topographic feature.

C. Topographic Features Statement (Shunting)

The activities proposed in this Plan are not affected by a topographic feature; therefore, Arena is not required to shunt drill cuttings and drill fluids.

D. Live Bottoms (Pinnacle Trend) Map

Certain lease are located in areas characterized by the existence of live bottoms. Live bottom (Pinnacle trend features) are small, isolated, low to moderate relief carbonate reef features or outcrops of unknown origin or hard substrates exposed by erosion that provide surface area for the growth of sessile invertebrates and attract large number of fish. Known features occur in an area of topographic relief in the northeastern portion of the western Gulf of Mexico.

Theses lease would contain a Live Bottom Stipulation to ensure that impacts from nearby oil and gas activities on these live bottom areas are mitigated to the greatest extent possible.

For each affected lease, the Live Bottom Stipulation requires that you prepare a live bottom survey report containing a bathymetry map prepared by using remote sensing techniques. This report must be submitted to the BOEM Gulf of Mexico OCS Region (GOMR) before you may conduct any drilling activities or install any structure, including lease term pipelines in accordance with NTL 2009-G39.

The existing surface location in Eugene Island Block 237 is not located within 200 feet of any pinnacle trend feature with vertical relief equal to or greater than 8 feet; as such live bottom information is not required.

E. Live Bottoms (Low Relief) Map

Certain leases are located in areas characterized by the existence of live bottoms. Live bottom (Low relief features) are sea grass communities; those areas that contain biological assemblages consisting of sessile invertebrates living upon and attached to naturally occurring hard or rocky formations with rough, broken, or smooth topography; and areas where a hard substrate and vertical relief may favor the accumulation of turtles, fishes or other fauna. These features occur in the Eastern Planning Area of the Gulf of Mexico.

The existing surface location in Eugene Island Block 237 is not located within 200 feet of any pinnacle trend feature with vertical relief equal to or greater than 8 feet; as such live bottom (low relief) maps are not required.

F. Potentially Sensitive Biological Features Map

Oil and gas operations and transportation activities in the vicinity of potentially sensitive biological features may cause deleterious impacts to the sessile and pelagic communities associated with those habitats. Adverse impacts to the communities could be caused by mechanical damage from drilling rigs, platforms, pipelines and anchor employment.

The existing surface location in Eugene Island Block 237 is not located within 61 meters (200 feet) of potentially sensitive biological features; as such the biologically sensitive maps are not required.

G. Threatened or Endangered Species, Critical Habitat, and Marine Mammal Information

The BOEM revised Title 30 CFR Part 550, Subpart B to require lessees/operators to address the federally listed species with designated critical habitat as well as marine mammals which may be impacted by the proposed activities addressed under this Plan.

Section 7 of the Endangered Species Act (ESA) all federal agencies must ensure that any actions they authorize, fund, or carry out are not likely to jeopardize the continued existence of a listed species, or destroy or adversely modify its designated critical habitat.

Included as **Attachment H** is a listing of the species under the jurisdiction of NOAA fisheries that are known to occur in the Gulf of Mexico that may be affected by the proposed action.

Arena does not anticipate that the proposed activities will occur in the presence of federally listed threatened or endangered species and critical habitat designated under the ESA and marine mammals protected under the Marine Mammal Protection Act (MMPA) based on the information is the referenced attachment.

H. Archaeological Report

In accordance with NTL's 2011-JOINT-G01 and 2005-G07, Eugene Island Block 237 is located within an area requiring a 300-meter spacing survey.

This requirement provides protection of prehistoric and historic archaeological resources by requiring remote sensing surveys in areas designated to have a high probability for archaeological resources.

Copies of these reports would have been previously submitted to the BOEM under separate cover for the Supplemental Exploration Plan (Plan Control No. S-3027) which provided for the now existing surface location of Eugene Island Block 237 K Platform.

I. Air and Water Quality Information

According to NTL 2008-G04, air and water quality information is not required as the proposed activities provided for in this Plan do not impact the State of Florida.

K. Socioeconomic Information

According to NTL 2008-G04, socioeconomic information is not required as the proposed activities provided for in this Plan do not impact the State of Florida.

Section 7 - Wastes and Discharges Information (30 CFR Part 550.248)

A. Projected Generated Wastes

All projected solid and liquid wastes likely to be generated by our proposed activities are included in *Attachment I*. This attachment includes both operational wastes permitted by the appropriate NPDES General Permit GMG290269 and any other identified wastes.

Arena does not plan to treat, store or dispose of any of the above wastes down hole at our existing location.

B. Projected Ocean Discharges

All projected solid and liquid wastes likely to be generated by our proposed activities are included in **Attachment I.** This attachment includes both operational wastes permitted by the appropriate NPDES General Permit GMG290269 and any other identified wastes.

C. Modeling Report

According to NTL 2008-G04, a modeling report is not required for the operations proposed in this Plan.

D. NPDES Permits

According to NTL 2008-G04 information regarding NPDES permits is not required to accompany EP's or DOCD's in the Gulf of Mexico.

E. Cooling Water Intakes

According to NTL 2008-G04 information regarding cooling water intakes is not required to accompany EP's or DOCD's in the Gulf of Mexico.

Section 8 - Air Emissions Information (30 CFR Parts 550.249)

A. Emissions Worksheets and Screening Questions

The Projected Air Quality Emissions Report (Form BOEM-139) addresses the proposed drilling, completion and production activities proposed in this Plan.

As evidenced by **Attachment J**, the worksheets were completed based on the proposed activities being greater than 25 miles from shore and 200 kilometers of the Breton Wilderness Area.

B. Emissions Reduction Measures

The projected air emissions are within the exemption level; however, Arena utilizes ultra-low sulphur fuel which is considered an emission reduction measure and the factor has been adjusted in the worksheets.

C. Verification of Non-default Emission Factors

Arena has elected to use the default emission factors as provided in **Attachment J.**

D. Non-Exempt Activities

The proposed activities are within the exemption amount as detailed in $\boldsymbol{Attachment}$.

E. Modeling Report

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Section 9 - Oil Spills Information (30 CFR Part 550.250)

A. Oil Spill Response Planning

All the proposed activities and facilities in this Plan will be covered by the Regional Oil Spill Response Plan filed by Arena Offshore, LP (BOEM Company No. 02628) in accordance with Title 30 CFR Part 254 and the most recent biennial approval on April 11, 2019.

The following locations will be used in the event and oil spill occurs as a result of the proposed activities.

Primary Response Equipment Location	Pre-Planned Staging Location(s)
Houma, LA	Fort Jackson, LA/Venice LA

Arena utilizes Clean Gulf Associates (CGA) as its primary provider for equipment, which is an industry cooperative owning an inventory of oil spill clean-up equipment. CGA is supported by the Marine Spill Response Corporation's (MSRC), which is responsible for storing, inspecting, maintaining and dispatching CGA's equipment. The MSRC STARS network provides for the closest available personnel, as well as an MSRC supervisor to operate the equipment.

Category	Regional OSRP	DOCD	Regional OSRP	DOCD
	WCD	WCD	WCD	WCD
	Production > 10	Production > 10		
Type of Activity	miles from shore	miles from shore	Drilling	Drilling
				OCS-G G 36207
Lease Number	OCS-G 02118	OCS-G 00981	OCS-G 00463	KL Prospect
Facility Location	EI 338	EI 237	ST 151	EI 237
Facility				
Designation	Platform K	Platform K	Location B	K Platform/MODU
Distance to Nearest				
Shoreline (miles)	75	49	30	49
Storage Tanks				
(total)	3000	28	0	28
Lease Pipelines	24	87	0	87
Uncontrolled				
Blowout (bbls)	7060	355	26,156	20,584
Total Volume (bbls)	10,084	470	26,156	20,699
Type of Oil	Oil	Oil	Oil	Oil
API Gravity	25.1°	36°	27.5°	34°

Section 9 - Oil Spills Information

(30 CFR Part 550.250)

Since Arena has the capability to respond to the appropriate worst-case spill scenario included in its Regional OSRP most recently approved revision on April 11, 2019 and since the worst-case scenarios determined for our Plan does not replace the worst-case scenarios in our Regional OSRP, I hereby certify that Arena has the capability to respond, to the maximum extent practicable, to a worst-case discharge, or a substantial threat of such a discharge, resulting from the activities proposed in our DOCD.

B. Oil Spill Response Discussion

In the event of an uncontrolled spill release resulting from the activities proposed in this Plan, Arena's Person-In-Charge on the platform/rig or the Shorebase Dispatcher would most likely be the initial individuals to contact the Qualified Individual (QI) or our Spill Management Team (SMT) detailed in the Regional OSRP. The QI would immediately activate the SMT to ascertain the severity of the spill incident. Arena's SMT Incident Command Center is located at O'Brien's Response Management, Inc.'s office in Slidell, Louisiana.

Dependent upon the severity of the spill incident, a trajectory analysis would be conducted utilizing the BOEM Oil Spill Risk Analysis Model (OSRAM) as referenced in our approved Regional OSRP. This trajectory would provide the required information on percentage and timing of potential impact to the shoreline impact areas. The SMT would then identify the areas of sensitivities at potential landfall segment(s), so additional planning may be conducted for shoreline protection strategies. If surveillance indicates a potential threat to shoreline; the appropriate equipment and personnel would be deployed, as outlined in our Regional OSRP.

An overflight may be conducted to determine the extent and dissipation rate of the spill, with potential sampling of the spill release. Mechanical recovery equipment may also be dispatched to the leading edge of the spill, as outlined in our Regional OSRP. If additional offshore response is required, the SMT would initiate the Dispersant Use Plan of the Regional OSRP and utilize the services of Airborne Support Inc.'s aircraft and personnel.

Included as **Attachment K** is the oil spill response discussion, equipment deployment, and containment for the proposed development operations.

C. Modeling Report

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Arena Offshore, LP Eugene Island Blocks 237/253/254

Section 9 - Oil Spills Information (30 CFR Part 550.250)

D. NTL 2015-N01

Included as **Attachment L** is the required worst-case discharge assumptions and calculations with supporting documentation as required in NTL 2015-N01. This data was submitted and approved under Plan Control No. N-9980. We are resubmitting to account for the Lease No. change to Eugene Island Block 254 to Lease OCS-G 36207. No other content was changed from previous approval.

Section 10 - Environmental Monitoring Information (30 CFR Part 550.252)

A. Monitoring Systems

Arena subscribes to StormGeo Inc. Weather Service which provides access to real-time weather conditions, and provides periodic updates on impending inclement weather conditions such as tropical depressions, storms and/or hurricanes entering the Gulf of Mexico.

Arena also relies on the National Weather Service to support the aforementioned subscribed service. During impending inclement weather conditions, Arena closely coordinates the activity with our contractors and field personnel to ensure the safety of people for evacuation; measures to prepare the facility for evacuation to ensure protection of the environment and the facility/equipment.

B. Incidental Takes

The BOEM revised regulations in Title 30 CFR Part 550, Subpart B to require lessees/operators to provide for monitoring systems if the activities provided for in this Plan have the potential to result in an incidental take of any federally listed species and/or marine mammals.

Arena does not anticipate the incidental taking of any species as a result of the proposed activities based on the implementation of, and adherence to the BOEM Notice to Lessees NTL 2016-G02 "Implementation of Seismic Mitigation Measures and Protected Species Observer Program", BOEM Notice to Lessees NTL 2016-G01 "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting"; and BSEE's Notice to Lessees NTL 2015-G03 "Marine Trash and Debris Awareness and Elimination".

Section 11 - Lease Stipulations/Special Conditions Information (30 CFR Part 550.253)

Under the Outer Continental Shelf Lands Act, both BOEM and BSEE are charged with the responsibility of managing and regulating the exploration and development on the OCS.

As part of the regulatory process, an Environmental Impact Statement (EIS) is prepared for each lease sale, at which time mitigation measures are addressed in the form of lease stipulations, which then become part of the oil and gas lease terms and are therefore enforceable as part of that lease.

As part of this process, the designated operator proposing to conduct related exploratory and development activities, must review the applicable lease stipulations, as well as other special conditions, which may be imposed by the BOEM, and other governing agencies.

The existing surface location in Eugene Island Block 237 (Lease OCS-G 00981) is subject to the following lease stipulations and special conditions:

• <u>Marine Protected Species</u>

The BOEM revised regulations in Title 30 CFR Part 550, Subpart B to require lessees/operators to provide for monitoring systems if the activities provided for in this Plan have the potential to result in an incidental take of any federally listed species and/or marine mammals.

Arena does not anticipate the incidental taking of any species as a result of the proposed activities based on the implementation of, and adherence to the BOEM Notice to Lessees NTL 2016-G02 "Implementation of Seismic Mitigation Measures and Protected Species Observer Program", BOEM Notice to Lessees NTL 2016-G01 and "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting"; and BSEE's Notice to Lessees NTL 2015-G03 "Marine Trash and Debris Awareness and Elimination".

Military Warning Area

The Military Areas Stipulation reduces potential impacts, particularly in regards to safety, but does not reduce or eliminate the actual physical presence of oil and gas operations in areas where military operations are conducted. As detailed in NTL 2014-G04, the existing surface disturbance in Eugene Island Block 237 is located within Military Warning Area W-59A. Therefore, in accordance with the requirements of the referenced stipulation, Arena will contact the Naval Air Station in order to coordinate and control the electromagnetic emissions during the proposed operations.

Arena Offshore, LP Eugene Island Blocks 237/253/254 October 30, 2019

Section 11 - Lease Stipulations/Special Conditions Information (30 CFR Part 550.253)

• Special Conditions

The proposed surface disturbance activity in Eugene Island Block 237 will not be affected by any special conditions and/or multiple uses, such as designated shipping/anchorage areas, lightering zones, rigs-to-reef zone, and ordnance disposal zones.

Section 12 - Environmental Mitigation Measures Information (30 CFR Part 550.254)

A. Measures Taken to Avoid, Minimize, and Mitigate Impacts

The activities proposed in this Plan do not have an impact on the State of Florida; as such this section is not applicable.

B. Incidental Takes

BOEM revised regulations in Title 30 CFR Part 550, Subpart B to require lessees/operators to provide for monitoring systems if the activities provided for in this Plan have the potential to result in an incidental take of any federally listed species and/or marine mammals.

Arena does not anticipate the incidental taking of any species as a result of the proposed activities based on the implementation of, and adherence to the:

- NTL 2015-G03 "Marine Trash and Debris Awareness Training and Elimination"
- NTL 2016-G01 "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting".
- NTL 2016-G02 "Implementation of Seismic Survey Mitigation Measures and Protected Species Observer Program".

Section 13 - Decommissioning Information (30 CFR Part 550.255)

The information at Title 30 CFR Part 250.255 regarding decommissioning is not required to accompany EP's and DOCD's submitted for the Gulf of Mexico.

Section 14 - Related Facilities & Operation Information (30 CFR Part 550.256)

A. Related OCS Facilities and Operations

The existing Eugene Island Block 237 K Platform was installed in 1994 and consists of 4-decks, 13-well slots, heliport and boat landing, and located in a water depth of 139 feet. The well test facilities consists of a well manifold, test separator and fuel/instrument gas system. The wells will be individually tested on the Eugene Island Block 237 K Platform and will depart the structure via existing 8-inch bulk oil (Segment No. 17622) lease pipeline to the Arena-operated Eugene Island Block 252 I Platform. These operations are also supported by an existing 6-inch gas lift (Segment No. 11133) lease pipeline from the Eugene Island Block 237 J Platform to the Eugene Island Block 237 K Platform. The separated and measured gas production will be delivered into Operations System No. 24.0/XWO, and the liquid hydrocarbons into Operations System No. 28.0.

B. Transportation System

Arena does not anticipate installation of any new and/or modified onshore facilities to accommodate the additional production from the Eugene Island Block 237 K Platform from Leases OCS-G 00981/G10741/G 36207.

C. Produced Liquid Hydrocarbon Transportation Vessels

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Section 15 - Support Vessels and Aircraft Information (30 CFR Part 550.257)

A. General

Personnel involved in the proposed operations will typically use their own vehicles as transportation to and from the selected onshore base; whereas the selected vendors will transport the equipment by a combination of trucks, boats and/or helicopters to the onshore base. The personnel and equipment will then be transported to the platform/rig taking the most direct route feasible as mandated by weather and traffic conditions. The table below provides for the maximum capacities, numbers and trip frequency used during the construction, drilling and production phases:

Туре	Maximum Fuel Tank Storage Capacity	Maximum No. in Area at Any Time	Trip Frequency or Duration				
			Mobilization on/off				
			during platform install				
Tug Boats	3,000 bbls	1	and drilling				
Supply Boats	500 bbls	1	Three trips per week				
Crew Boat	500 bbls	1	Four trips per week				
Aircraft	330 gals.	1	As needed				

B. Diesel Oil Supply Vessels

The following table details the vessels to be used for purposes other than fuel (i.e., corrosion control):

Size of Fuel Supply Vessel	Capacity of Fuel Supply Vessel	Frequency of Fuel Transfers	Route Fuel Supply Vessel Will Take
180' feet	1,500 bbls	Weekly	From the shorebase in Fourchon, LA to EI 237

C. Drilling Fluids Transportation

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

Section 15 - Support Vessels and Aircraft Information (30 CFR Part 550.257)

D. Solid and Liquid Wastes Transportation

Included as **Attachment I** is a listing of the solid and liquid wastes associated with the proposed activities in this Plan, detailing the types of waste and approximate composition, total amount, name and location, rate and transport method.

E. Vicinity Map

A Vicinity Plat detailing the surface location in Eugene Island Block 237 relative to the shoreline and onshore base is included as **Attachment M**.

Section 16 - Onshore Support Facilities Information (30 CFR Part 550.258)

A. General

The existing surface disturbance in Eugene Island Block 237 is located approximately 49 miles from the nearest Louisiana shoreline and 88 miles to the support base located in Port Fourchon, LA. Utilization of helicopters to the offshore facility will depart from a helipad located in Abbeville, LA.

Arena will utilize the existing Grand Isle Shipyard Dock located in Port Fourchon, LA and a helipad in Abbeville, LA to accomplish any of the following routine operations:

- Loading/Offloading point for equipment supporting the offshore operations,
- Dispatching personnel and equipment, and does not anticipate the need for any expansion of the selected facilities as a result of the activities proposed in this Plan,
- Temporary storage for materials and equipment
- 24-Hour Dispatcher

B. Support Base Construction or Expansion

The proposed operations do not require any immediate action to acquire additional land or to expand existing base facilities.

C. Support Base Construction or Expansion Timetable

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

D. Waste Disposal

Included as **Attachment I** is a listing of waste disposal facilities to be utilized as part of the associated activities in this Plan; detailing the types of waste, amount, rate and disposal method to be sent to shore.

E. Air Emissions

According to NTL 2008-G04 information regarding air emissions generated by onshore support facilities is not required to accompany EP's and DOCD's for the Gulf of Mexico.

F. Unusual Solid and Liquid Wastes

According to NTL 2008-G04 information regarding unusual solid and liquid wastes generated by onshore support facilities is not required to accompany EP's and DOCD's for the Gulf of Mexico.

Arena Offshore, LP Eugene Island Blocks 237/253/254

Section 17 - Sulphur Operations Information (30 CFR Part 550.259)

A. Bleedwater

Arena does not propose any sulphur related operations during the activities proposed in this Plan.

B. Subsidence

Arena does not propose any sulphur related operations during the activities proposed in this Plan.

Section 18 - Coastal Zone Management Information (30 CFR Part 550.260)

Under direction of the Coastal Zone Management Act (CZMA), the States of Alabama, Florida, Louisiana, Mississippi and Texas developed Coastal Zone Management Programs (CZMP) to allow for the supervision of significant land and water use activities that take place within or that could significantly impact their respective coastal zones.

A. Consistency Certification

Included as Attachment N is a Coastal Zone Management Consistency Certification for the State of Louisiana.

B. Other Information

According to NTL 2008-G04, this Section of the Plan is not applicable to the proposed operations.

A. Impact Producing Factors (IPF's) From Proposed Activities

The following matrix is utilized to identify the affected environments that could be impacted by these—IPF's. An "x" has been marked for each IPF category that Arena has determined may impact a particular environment as a result of the proposed activities. For those cells which are footnoted, a statement is provided as to the applicability of the proposed activities, and where there may be an effect, an analysis of the effect is provided.

Environmental	al Impact Producing Factors (IPFs)								
Resources	í		mpace rrondoms r	2015 (1115)		J			
	Emissions (air, noise, light, etc.)	Effluents (muds, cuttings, other discharges to the water column or seafloor)	Physical disturbances to the seafloor (rig or anchor emplacement, etc.)	Wastes sent to shore for treatment or disposal	Accidents (e.g. oil spills, chemical spills, H ₂ S release)	Other IPFs you identify			
Site Specific at	 I			1 '	1	Ţ <u></u>			
Offshore Location	r	/1)	/11	 '	(1)	+			
Designated topographic features	ı	(1)	(1)	1	(1)				
Pinnacle Trend area		(2)	(2)		(2)	+			
live bottoms	í.	(4)	(4)	1	(4)	1			
Eastern Gulf live	ı	(3)	(3)		(3)	+			
bottoms	ı			1'	1	<u></u>			
Chemosynthetic	ī		(4)	1		1			
communities	L			<u></u> '	<u> </u>				
Water quality		<u> </u>		<u></u> '					
Fisheries				<u>-</u>					
Marine mammals	(8)			<u></u> '	(8)				
Sea turtles	(8)		<u> </u>		(8)	<u> </u>			
Air quality	(9)		<u> </u>	 '		 /			
Shipwreck sites	ſ		(7)	1		1			
(known or potential)			(F)	 '	 				
Prehistoric	ſ		(7)	1		1			
archaeological sites Vicinity of Offshore		+	+	 '	+	+			
Location	í.		Ţ	1		1			
Essential fish habitat	i 	+	+		(6)	+			
Marine and pelagic	i	+	+			+			
birds	ſ		Ţ	1		1			
Public health and	r		†	ſ '	(5)	†			
safety	ı		<u></u> !	1'	1	<u></u>			
,,	·			í'					
Coastal & Onshore				[
Beaches				<u> </u>	(6)				
Wetlands				'	(6)				
Shorebirds and	<u> </u>		1	1 '	(6)	Γ			
coastal nesting birds	<u> </u>		<u> </u>	<u> </u>	<u> </u>				
Coastal wildlife	ſ		Ţ	1		1			
refuges			 	 '					
Wilderness areas	<u> </u>								

Footnotes for Environmental Impact Analysis Matrix

- 1. Activities that may affect a marine sanctuary or topographic feature. Specifically, if the well or platform site or any anchors will be on the seafloor within the:
 - (a) 4-mile zone of the Flower Gardens Banks, or the 3-mile zone of Stetson Bank;
 - (b) 1000-m, 1-mile or 3-mile zone of any topographic feature (submarine bank) protected by the Topographic Features Stipulation attached to an OCS lease;
 - (c) Essential Fish Habitat (EFH) criteria of 500 ft from any no-activity zone; or
 - (d) Proximity of any submarine bank (500 ft buffer zone) with relief greater than 2 meters that is not protected by the Topographic Stipulation attached to an OCS lease.
- 2. Activities with any bottom disturbance within an OCS lease block protected through the Live Bottom (Pinnacle Trend) Stipulation attached to an OCS lease.
- 3. Activities within any Eastern Gulf OCS block where seafloor habitats are protected by the Live Bottom (Low-Relief) Stipulation attached to an OCS lease.
- 4. Activities on blocks designated by the BOEM as being in water depths 300 meters or greater.
- 5. Exploration or production activities where H₂S concentrations greater than 500 ppm might be encountered.
- 6. All activities that could result in an accidental spill of produced liquid hydrocarbons or diesel fuel that you determine would impact these environmental resources. If the proposed action is located a sufficient distance from a resource that no impact would occur, the EIA can note that in a sentence or two.
- 7. All activities that involve seafloor disturbances, including anchor emplacements, in any OCS block designated by the BOEM as having high-probability for the occurrence of shipwrecks or prehistoric sites, including such blocks that will be affected that are adjacent to the lease block in which your planned activity will occur. If the proposed activities are located a sufficient distance from a shipwreck or prehistoric site that no impact would occur, the EIA can note that in a sentence or two.
- 8. All activities that you determine might have an adverse effect on endangered or threatened marine mammals or sea turtles or their critical habitats.
- 9. Production activities that involve transportation of produced fluids to shore using shuttle tankers or barges.

B. <u>Impact Analysis</u>

Site Specific at Offshore Location

• Designation Topographic Features

There are no anticipated emissions, effluents, physical disturbances to the seafloor, wastes transported to shore, and/or accidents from the proposed activities that could cause impacts to topographic features. The surface disturbance within Eugene Island Block 237 is located approximately 50 miles away from the Fishnet Bank. The crests of designated topographic features in the northern Gulf are found below 10 m. In the event of an accidental oil spill from the proposed activities, the gravity of such oil (high gravity condensate and/or diesel fuel) would rise to the surface, quickly dissipate, and/or be swept clear by the currents moving around the bank; thereby avoiding the sessile biota.

• Pinnacle Trend Area Live Bottoms

There are no anticipated emissions, effluents, physical disturbances to the seafloor, wastes sent to shore, and/or accidents from the proposed activities that could cause impacts to a pinnacle trend area. The proposed surface disturbance within Eugene Island Block 237 is located a significant distance (> 100 miles) from the closest pinnacle trend live bottom stipulated block. The crests of the pinnacle trend area are much deeper than 20 m. In the event of an accidental oil spill from the proposed activities, the gravity of such oil (high gravity condensate and/or diesel fuel) would rise to the surface, quickly dissipate, and/or be swept clear by currents moving around the bank; and thus not impacting the pinnacles.

• Eastern Gulf Live Bottoms

There are no anticipated emissions, effluents, emissions physical disturbances to the seafloor, wastes sent to shore, and/or accidents from the proposed activities that could cause impacts to Eastern Gulf live bottoms. The proposed surface disturbance within Eugene Island Block 237 is located a significant distance (>100 miles) from the closest pinnacle Eastern Gulf live bottom stipulated block.

In the event of an accidental oil spill from the proposed activities, the gravity of such oil (high gravity condensate and/or diesel fuel) would rise to the surface, quickly dissipate, and/or be swept clear by currents moving around the bank; and would not be expected to cause adverse impacts to Eastern Gulf live bottoms because of the depth of the features and dilutions of spills.

• Chemosynthetic Communities

Water depths at the surface location in Eugene Island Block 237 is approximately 139 feet. Therefore, the proposed activities are not located within the vicinity of any known chemosynthetic communities, which typically occur in water depths greater than 300 meters. Based on the water depth, there are no anticipated emissions, effluents, emissions physical disturbances to seafloor, wastes sent to shore, and/or accidents from the proposed activities that could impact these types of communities.

Water Quality

Routine operational discharges authorized by EPA's Region VI NPDES General Permit GMG290000 are regulated based on volume discharge rate limitations, and certain testing requirements for oil and grease and toxicity limitations. As such, it is not anticipated these discharges will cause significant adverse impacts to water quality.

Accidental oil spill release from the proposed activities, and cumulative similar discharge activity within the vicinity could potentially cause impacts to water quality. It is unlikely that an accidental oil spill release would occur from the proposed activities. In the event of such a release, the water quality would be temporarily affected by the dissolved components and small droplets. Currents and microbial degradation would remove the oil from the water column or dilute the constituents to background levels.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Fisheries

Accidental oil spill release from the proposed activities, and cumulative similar discharge activity within the vicinity may potentially cause some detrimental effects on fisheries. It is unlikely a spill would occur; however, such a release in open waters closed to mobile adult finfish or shellfish would likely be sublethal and the extent of damage would be reduced to the capability of adult fish and shellfish to avoid a spill, to metabolize hydrocarbons, and to excrete both metabolites and parent compounds.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

Arena will conduct the proposed activities under EPA's Region VI NPDES General Permit GMG290000 which authorizes the discharge of certain effluents, subject to certain limitations, prohibitions and recordkeeping requirements. As such, it is not anticipated these discharges will cause significant adverse impacts to water quality.

• Marine Mammals

As a result of the proposed activities, marine mammals may be adversely impacted by emissions, effluents, waste sent to shore, and/or accidents.

Chronic and sporadic sub-lethal effects could occur that may stress and/or weaken individuals of a local group or population and make them more susceptible to infection from natural or anthropogenic sources. Few lethal effects are expected from accidental oil spill, chance collisions with service vessels and ingestion of plastic material.

The net results of any disturbance would depend on the size and percentage of the population affected, ecological importance of the disturbed area, environmental and biological parameters that influence an animal's sensitivity to disturbance and stress, and the accommodation time in response to prolonged disturbance (Geraci and St. Aubin, 1980). Collisions between cetaceans and ship could cause serious injury or death (Laist et al., 2001).

Sperm whales are one of 11 whale species that are hit commonly by ships (Laist et al., 2001). Collisions between OCS vessels and cetaceans within the project area are expected to be unusual events.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

Arena will conduct the proposed activities under EPA's Region VI NPDES General Permit GMG290000 which authorizes the discharge of certain effluents, subject to certain limitations, prohibitions and recordkeeping requirements. As such, it is not anticipated these discharges will cause significant adverse impacts to water quality.

Additionally, Arena does not anticipate the incidental taking of any marine mammals as a result of the proposed activities. The proposed activities will be conducted by our company and its contractors under the additional criteria addressed by the BOEM Notice to Lessees NTL 2016-G02 "Implementation of Seismic Mitigation Measures and Protected Species Observer Program", BOEM Notice to Lessees NTL 2016-G01 Vessel Strike Avoidance and Injured/Dead Protected Species Reporting"; and BSEE's Notice to Lessees NTL 2015-G03 "Marine Trash and Debris Awareness and Elimination".

Sea Turtles

As a result of the proposed activities, sea turtles may be adversely impacted by emissions, effluents, waste sent to shore, and/or accidents.

Small numbers of turtles could be killed or injured by chance collision with service vessels or by eating indigestible trash, particularly plastic items accidentally lost from drilling rigs, production facilities and service vessels. Drilling rigs and project vessels (construction barges) produce noise that could disrupt normal behavior patterns and create some stress to sea turtles, making them more susceptible to disease. Accidental oil spill release are potential threats which could have lethal effects on turtles. Contact and/or consumption of this released material could seriously affect individual sea turtles. Most OCS related impacts on sea turtles are expected to be sub-lethal. Chronic and/or avoidance of effected areas could cause declines in survival or productivity, resulting in gradual population declines.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

Arena will conduct the proposed activities under EPA's Region VI NPDES General Permit GMG290000 which authorizes the discharge of certain effluents, subject to certain limitations, prohibitions and recordkeeping requirements. As such, it is not anticipated these discharges will cause significant adverse impacts to water quality.

Additionally, Arena does not anticipate the incidental taking of any sea turtles as a result of the proposed activities. The proposed activities will be conducted by our company and its contractors under the additional criteria addressed by the BOEM Notice to Lessees NTL 2016-G02 "Implementation of Seismic Mitigation Measures and Protected Species Observer Program", BOEM Notice to Lessees NTL 2016-G01 "Vessel Strike Avoidance and Injured/Dead Protected Species Reporting"; and BSEE's Notice to Lessees NTL 2015-G03 "Marine Trash and Debris Awareness and Elimination".

Air Quality

The proposed activities are located approximately 49 miles to the nearest Louisiana shoreline. There would be a limited degree of air quality degradation in the immediate vicinity of the proposed activities. Air quality analyses of the proposed activities are below the BOEM exemption level. As such, Arena does not anticipate any IPF's as a result of the proposed activities.

• Ship Wreck Sites (Known or Potential)

There are no physical disturbances to the seafloor which could impact known or potential shipwreck sites, as the review of high resolution shallow hazards data indicate there are no known or potential shipwreck sites located within the surveyed area. As such, Arena does not anticipate any IPF's as a result of the proposed activities.

• Prehistoric Archaeological Sites

There are no physical disturbances to the seafloor which could cause impacts to prehistoric archaeological sites, as the review of high resolution shallow hazards data and supporting studies did not reflect the occurrence of prehistoric archaeological sites. As such, Arena does not anticipate any IPF's as a result of the proposed activities.

Vicinity of Offshore Location

• Essential Fish Habitat

As a result of the proposed activities, essential fish habitat may be adversely impacted by effluents and/or accidents.

An accidental oil spill that may occur as a result of the proposed activities has potential to cause some detrimental effects on essential fish habitat. It is unlikely that an accidental oil spill release would occur; however, if a spill were to occur in close proximity to finfish or shellfish, the effects would likely be sub-lethal and the extent of damage would be reduced to the capability of adult fish and shellfish to avoid a spill, to metabolize hydrocarbons, and to excrete both metabolites and parent compounds.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Marine and Pelagic Birds

As a result of the proposed activities, marine and pelagic birds may be adversely impacted by an accidental oil spill, by the birds coming into contact with the released oil. It is unlikely that an accidental oil spill release would occur.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Public Health and Safety

There are no anticipated emissions, effluents, wastes sent to shore, and/or accidents from the proposed activities that could cause impacts to the public health and safety. Arena has requested BOEM approval to classify the proposed objective area as absent of hydrogen sulfide.

Coastal and Onshore

• Beaches

As a result of the proposed activities, beaches may be adversely impacted by an accidental oil spill. However, due to the distance from shore (approximately 49 miles to nearest Louisiana shoreline), and the response capabilities that would be implemented, no significant adverse impacts are expected. Both historical spill data and the combined trajectory/risk calculations referenced in the publication of OCS EIA /EA BOEM 2002-052 indicate there is little risk of contact or impact to the coastline and associated environmental resources.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

Wetlands

As a result of the proposed activities, wetlands may be adversely impacted by an accidental oil spill. However, due to the distance from shore (approximately 49 miles to the nearest Louisiana shoreline) and the response capabilities that would be implemented, no significant adverse impacts are expected. Both historical spill data and the combined trajectory/risk calculations referenced in the publication of OCS EIA /EA BOEM 2002-052 indicate there is little risk of contact or impact to the coastline and associated environmental resources.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Shore Birds and Coastal Nesting Birds

As a result of the proposed activities, shore birds and coastal nesting birds may be adversely impacted by an accidental oil spill. However, due to the distance from shore (approximately 49 miles to the nearest Louisiana shoreline) and the response capabilities that would be implemented, no significant adverse impacts are expected. Both historical spill data and the combined trajectory/risk calculations referenced in the publication of OCS EIA /EA BOEM 2002-052 indicate there is little risk of contact or impact to the coastline and associated environmental resources.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Coastal Wildlife Refuges

As a result of the proposed activities, coastal wildlife refuges may be adversely impacted by an accidental oil spill. However, due to the distance from shore (approximately 49 miles to the nearest Louisiana shoreline) and the response capabilities that would be implemented, no significant adverse impacts are expected. Both historical spill data and the combined trajectory/risk calculations referenced in the publication of OCS EIA /EA BOEM 2002-052 indicate there is little risk of contact or impact to the coastline and associated environmental resources.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

• Wilderness Areas

As a result of the proposed activities, wilderness areas may be adversely impacted by an accidental oil spill. However, due to the distance to the nearest area (approximately 49 miles to the nearest Louisiana shoreline) and the response capabilities that would be implemented, no significant adverse impacts are expected. Both historical spill data and the combined trajectory/risk calculations referenced in the publication of OCS EIA /EA BOEM 2002-052 indicate there is little risk of contact or impact to the coastline and associated environmental resources.

In the event of an unanticipated blowout resulting in an oil spill, it is unlikely to have an impact based on the industry wide standards for using proven equipment and technology for such responses, implementation of Arena's Regional Oil Spill Response Plan which addresses available equipment and personnel, techniques for containment and recovery, and removal of the oil spill.

Other Resources Identified

Arena has not identified any other environmental resources other than those addressed above.

C. <u>Impacts on Proposed Activities</u>

Arena does not anticipate any impacts on the offshore site specific locations, offshore vicinity, and/or coastal and onshore environmental conditions.

D. Environmental Hazards

Eugene Island Block 237 is not located within a geographic area impacted by strong environmental phenomena, other than potential hurricanes in the Gulf of Mexico. The permanent structure has been designed to meet the current regulations and design criteria for these hurricane events. To mitigate potential impacts to the facility and/or wells during impending hurricanes, Arena will take precautionary measures to secure the facility, shutting in the wells and evacuating personnel for evacuation as further detailed in our U.S. Coast Guard Emergency Evacuation Plan.

E. Alternatives

There are no alternatives other than those required by regulation to the considered to reduce the environmental impacts of the activities proposed in this Plan.

F. <u>Mitigation Measures</u>

No mitigation measures other than those required by regulations will be considered to avoid, lessen or eliminate potential impacts on environmental resources.

G. Consultation

Arena has not contacted any agencies or persons for consultation regarding potential impacts associated with the proposed activities. Therefore, a list of such entities is not being provided.

H. Preparer

Questions or requests for additional information should be made to Arena's authorized representative/preparer of this Plan:

Aimee P. Deady Arena Offshore, LP 4200 Research Forest Drive, Suite 230 The Woodlands, Texas 77381 281-210-3180 (Phone) aimee@arenaoffshore.com

I. References

The following documents were utilized in preparing the Environmental Impact Assessment (though not necessarily cited in the document):

Document	Author	Dated
Shallow Hazards Survey Report	Geoquip Corp.	1993
Environmental Impact Statement Report No.	Bureau of Ocean Energy	
2007-003	Management	2007
	Bureau of Ocean Energy	
Title 30 CFR Part 550	Management	2019
	Bureau of Safety and	
Title 30 CFR Part 250	Environmental Enforcement	2019
	Bureau of Ocean Energy	
OCS EIA/EA BOEM 2002-052	Management	2002
0	494077	
NPDES General Permit GMG290000	EPA – Region VI	2017
Regional Oil Spill Response Plan	J. Connor Consulting	2019

Document	Author	Dated
NTL 2005-G07 "Archaeological Resource Surveys	Bureau of Ocean Energy	
and Reports"	Management	2005
	Bureau of Ocean Energy	
NTL 2008-G05 "Shallow Hazards Program"	Management	2005
NTL 2009-G04 "Significant OCS Sediment	Bureau of Ocean Energy	
Resources in the Gulf of Mexico	Management	2009
NTL 2009-N11 "Air Quality Jurisdiction on the	Bureau of Ocean Energy	
OCS"	Management	2009
NTL 2009-G26 "U.S. Air Force Communication	Bureau of Ocean Energy	
Towers"	Management	2009
NTL 2009-G27 "Submitting Exploration Plans		
and Development Operations Coordination	Bureau of Ocean Energy	
Documents"	Management	2009
NTL 2009-G29 "Implementation Plan for		
Transition from North American Datum 27 to	Bureau of Ocean Energy	
North American Datum 83	Management	2009
	Bureau of Ocean Energy	
NTL 2009-G31 "Hydrogen Sulfide"	Management	2009
	Bureau of Ocean Energy	
NTL 2009-G34 "Ancillary Activities"	Management	2009
NTL 2009-G40 "Deepwater Benthic	Bureau of Ocean Energy	
Communities"	Management	2009
	Bureau of Ocean Energy	
NTL 2011-G01 "Revision to the List of OCS Lease	Management and Bureau of	
Blocks Requiring Archaeological	Safety and Environmental	
Resource Surveys and Reports"	Enforcement	2011
NTL 2012-G01 "Drilling Windows, Eastern Gulf of	Bureau of Ocean Energy	
Mexico"	Management	2012
NTL 2014-G04 "Military Warning and Water Test	Bureau of Ocean Energy	
Areas	Management	2014
NTL 2015-N01 "Information Requirements for		
Exploration Plans, Development & Production		
Plans, and Development Operations Coordination		
Documents on the OCS for Worst Case Discharge	Bureau of Ocean Energy	
and Blowout Scenarios"	Management	2015
BSEE NTL 2015-G03 "Marine Trash & Debris	Bureau of Safety and	
Awareness & Elimination"	Environmental Enforcement	2015

Document	Author	Dated
	Bureau of Ocean Energy	
NTL 2015-N04 "General Financial Assurance"	Management	2015
NTL 2015-N06 "Procedures and Requirements		
for Right-of-Use and Easement Requests for		
Platforms, Artificial Island, Installations and	Bureau of Ocean Energy	
Other Devices Attached to the Seabed"	Management	2015
	Bureau of Ocean Energy	
NTL 2016-N01 – Requiring Additional Security	Management	2016
NTL 2016-G01 "Vessel Strike Avoidance and	Bureau of Ocean Energy	
Injured/Dead Protected Species Reporting"	Management	2016
NTL 2016-G02 "Implementation of Seismic		
Mitigation Measures & Protected Species	Bureau of Ocean Energy	
Observer Program"	Management	2016

Section 20 - Administrative Information (30 CFR Part 550.262)

A. Exempted Information Description (Public Information Copies Only)


Excluded from the Public Information copies are the following:

- a. Proposed bottomhole location information
- b. Proposed total well depths (measured and true vertical depth)
- c. Production Rates and Life of Reserves
- d. New and Unusual Technology
- e. Mineral Resource Conservation Information
- f. Geological and Geophysical Attachments
- g. Correlative well information used to justify H2S classification request

B. Bibliography

The following documents were utilized in preparing the Plan:

Document	Author	Dated
BOEM Environmental Impact Statement		2225
Report No. 2007-003	BOEM	2007
Regional Oil Spill Response Plan	J. Connor Consulting	2019
Supplemental Exploration Plan (Plan Control No. S-3027)	Chevron U.S.A.	1993
Initial Development Operations Coordination Document (Plan Control No. N-4838)	Chevron U.S.A.	1994
Supplemental Development Operations Coordination Document (Plan Control No. S-3946)	Chevron U.S.A.	1996
Supplemental Development Operations Coordination Document (Plan Control No. S-5126)	Chevron U.S.A.	1999
Supplemental Development Operations Coordination Document (Plan Control No. S-5667)	Chevron U.S.A.	2001
Initial /Supplemental Development Operations Coordination Document (Plan		
Control No. N-9980)	Arena Offshore, LP	2017

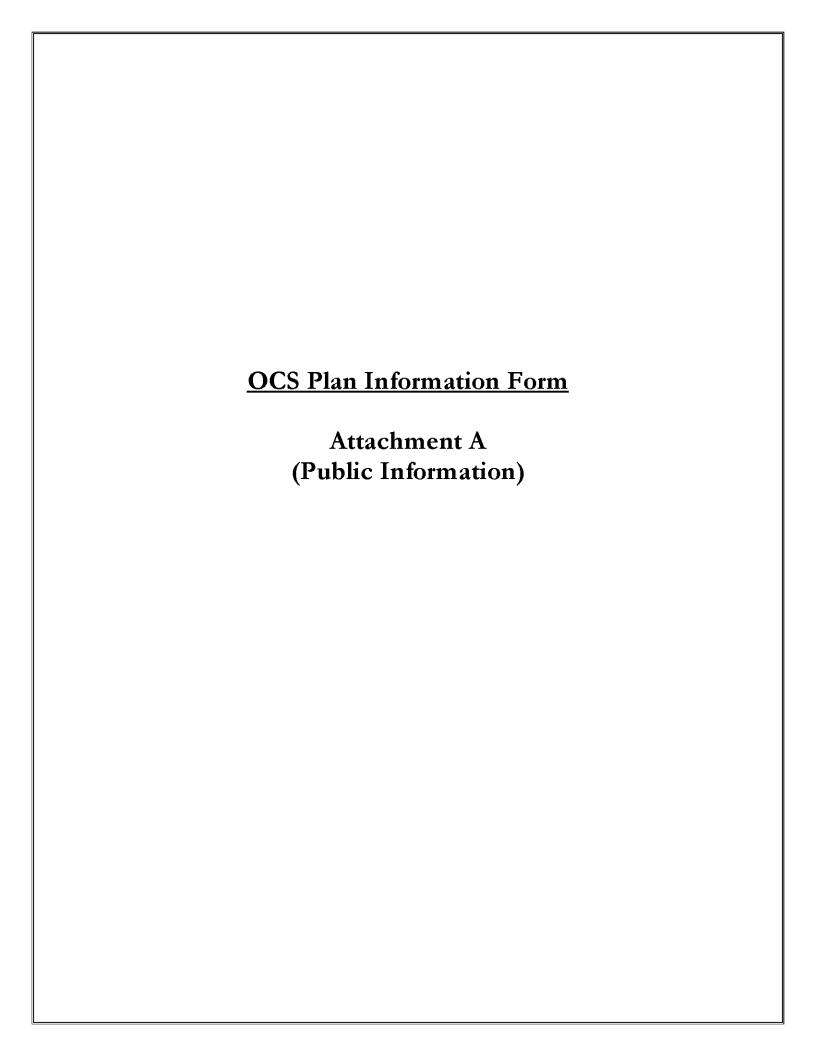

OMB Control Number: 1010-0151 OMB Approval Expires: 6/30/2021

OCS PLAN INFORMATION FORM

					Genera	l Infor	natio	n						
Туре	of OCS Plan:	Explo	ration Plan	(EP) Dev		elopment Operations Coordination Document (DOCD)						X		
Comp	oany Name: Arena Off	shore, LP			BOEM Operator Number: 02628									
Address:						Contact Person: Aimee P. Deady								
4200 Research Forest Drive, Suite 230						Phone Number: 281-210-3180								
	The Woodlar	nds, Texas	s 77381		E-Mail	E-Mail Address: aimee@arenaoffshore.com								
If a service fee is required under 30 CFR 550.125(a), provide to						Amount paid \$8476.00 Receipt No. 26L6F						6L6R	VKI	
			Project :			Case Discharge (WCD) Information								
	(s): OCS-G00981/107	41/36207	Area: El	Block	1000	Project Name (If Applicable):								
	etive(s) X Oil X	Gas	Sulphur	Salt				(s): Port Fourchon,						
	orm/Well Name: K / K		Total Volu	me of WCI): _{20,584} I	obls (We	II Loca	ation KL) API	Gravity	":34°				
	nce to Closest Land (M	0.000.000						wout: 20,584 bbls		11				
	you previously provid								X	Yes		No		
If so,	provide the Control N	umber of th	e EP or DO	CD with wl	hich this ir	ıformatio	n was j	provided	N-9980 (E	254 expired; Nev	v Lease No. fo	r El 254 OCS G-	36207- no olher changes)	
Do yo	ou propose to use new	or unusual	technology 1	o conduct	your activi	ties?				Yes	X	No		
Do yo	ou propose to use a ves	sel with an	chors to inst	all or modi	fy a struct	ure?				Yes	X	No		
Do yo	ou propose any facility	that will se	erve as a hos	t facility fo	r deepwater subsea development?					Yes	Х	No		
	De	scription	of Propo	sed Activ	vities an	d Tenta	ative!	Schedule (Mark	all tha	t apply	7)			
	Propo	sed Activit	y		Sta	Start Date End Date			No			o. of Day	ys	
	ration drilling													
Deve	lopment drilling				02	/02/2020)	12/31/2022			510 days total			
	completion				includ	ed in ab	ove included in above							
	test flaring (for more t													
Instal	lation or modification	of structure												
Instal	lation of production fa	cilities												
Instal	lation of subsea wellhe	eads and/or	manifolds											
Instal	lation of lease term pip	oelines												
Com	mence production				04.	/01/2020)	12/31/2033	./31/2033 _ 13 year			3 years		
Other	(Specify and attach de	escription)												
	Descri	ption of	Drilling R	lig				Descrip		of Structure				
Х	Jackup		Drillsh				Cais				-5.55	g platform		
	Gorilla Jackup		Platfor	2550		X	Fixe	d platform		Complia	GIA:SCI	er		
Semisubmersible Submersible							Spar			Guyed tower				
DP Semisubmersible Other (Attach Desc					cription)		Floa syste	ting production		Other (A	ttach I	Descripti	on)	
Drilli	ng Rig Name (If Know	/n):												
						Lease T		Pipelines						
Fro	m (Facility/Area/Blo	ck)	To (Facil	ity/Area/B	lock)		Di	ameter (Inches)			Len	gth (Fee	t)	

Include one copy of this page for each proposed well/structure Proposed Well/Structure Location Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No structure, reference previous name): Platform K DOCD? No If this is an existing well or structure, list the Is this an existing well Yes 26095-1 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of WCD info For wells, volume of uncontrolled For structures, volume of all storage and 36° blowout (Bbls/day): NA pipelines (Bbls): 77 bbls fluid **Bottom-Hole Location (For Wells)** Completion (For multiple completions, Surface Location enter separate lines) OCS **OCS** Lease No. OCS G 00981 **OCS** Area Name Eugene Island Block No. 237 N/S Departure: Fs L N/S Departure: Blockline N/S Departure: N/S Departure: Departures L 559.18' N/S Departure: (in feet) E/W Departure: E/W Departure: E/W Departure: FE L E/W Departure: L 7120.83 E/W Departure: X: Lambert X-X: 1,947,812.69 X: coordinates Y: Y: Y: -48,517.00 Y: Latitude Latitude Latitude/ Longitude Latitude 28° 31' 59.3716" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9262" W Longitude Water Depth (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Area Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor or No. X = X = X = X = X = X =Y =X = X =

Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No Yes structure, reference previous name): Well No. K001 If this is an existing well or structure, list the Is this an existing well Yes 17-709-40975-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of WCD info For wells, volume of uncontrolled For structures, volume of all storage and 34° fluid blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 **Bottom-Hole Location (For Wells)** Completion (For multiple completions, **Surface Location** enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: N/S Departure: Blockline Fs L N/S Departure: N/S Departure: Departures L 549.07 N/S Departure: L (in feet) E/W Departure: E/W Departure: E/W Departure: FE_L E/W Departure: L 7135.81 E/W Departure: F L X: Lambert X-X: 1,947,797.71 coordinates X: Y: Y. -48,527.11 Y: Latitude Latitude/ Latitude Latitude Latitude Longitude 28° 31' 59.2713" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0939" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) X Coordinate Y Coordinate Block Length of Anchor Chain on Seafloor Anchor Name Area or No. Y = X = Y = X = X = X = Y = X = X = X =

Include one copy of this page for each proposed well/structure Proposed Well/Structure Location Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No structure, reference previous name): Well No. K002 (ST01BP00) DOCD? If this is an existing well or structure, list the Is this an existing well Yes 17-709-40994-01 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of WCD info For wells, volume of uncontrolled For structures, volume of all storage and 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid Bottom-Hole Location (For Wells) Completion (For multiple completions, Surface Location enter separate lines) OCS **OCS** Lease No. OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: Blockline N/S Departure: Fs L N/S Departure: N/S Departure: Departures L 549.05' (in feet) N/S Departure: E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: L 7128.31 E/W Departure: X: Lambert X-X: 1,947,805.21 coordinates X: Y: Y: Y: -48,527.13 Y: Latitude Latitude Latitude Latitude/ Latitude Longitude 28° 31' 59.2712" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0099" W Longitude TVD (Feet): MD (Feet): TVD (Feet): Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Area Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor or No. X = X = Y =X = X = X =X =Y =X = X =

Proposed Well/Structure Location Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or Yes No structure, reference previous name): Well No. K003 If this is an existing well or structure, list the Is this an existing well Yes 17-709-41000-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of WCD info For structures, volume of all storage and For wells, volume of uncontrolled 34° blowout (Bbls/day): 20,584 bbls fluid pipelines (Bbls): 0 Bottom-Hole Location (For Wells) Completion (For multiple completions, **Surface Location** enter separate lines) Lease No. OCS OCS OCS G 00981 **OCS** Area Name Eugene Island Block No. 237 Blockline N/S Departure: N/S Departure: N/S Departure: Fs L N/S Departure: L **Departures** 549.03' N/S Departure: (in feet) E/W Departure: E/W Departure: E/W Departure: E/W Departure: L 7120.81 E/W Departure: X: Lambert X-X: 1,947,812.71 coordinates X: **Y**: Y: Y: -48,527.15 Y: Latitude Latitude/ Latitude Latitude Longitude 28° 31' 59.2711" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9258" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor **Anchor Name** Area or No. Y = X = X = Y =X = X = Y =X = X =X = X =

Proposed Well/Structure Location Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No Yes structure, reference previous name): Well No. K004 (ST01BP00) DOCD? Yes No If this is an existing well or structure, list the Is this an existing well 17-709-41105-01 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of WCD info For structures, volume of all storage and For wells, volume of uncontrolled 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid Completion (For multiple completions, **Surface Location Bottom-Hole Location (For Wells)** enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: N/S Departure: Blockline Fs L N/S Departure: N/S Departure: L **Departures** 566.47 N/S Departure: L (in feet) E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: L 7135.76 E/W Departure: L X: Lambert X-X: 1,947,797.76 coordinates X: Y: Y: Y: -48,509.71 Y: Latitude Latitude Latitude/ Latitude Longitude 28° 31' 59.4436" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0936" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Y Coordinate Block X Coordinate Length of Anchor Chain on Seafloor Anchor Name Area or No. Y =X = Y = X = X = X = Y =X = X = X =X =

Proposed Well/Structure Location Previously reviewed under an approved EP or Well or Structure Name/Number (If renaming well or Yes No structure, reference previous name): Well No. K005 (ST00BP01) DOCD? No If this is an existing well or structure, list the Is this an existing well Yes 17-709-41106-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No WCD info For structures, volume of all storage and API Gravity of For wells, volume of uncontrolled 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid Surface Location Bottom-Hole Location (For Wells) Completion (For multiple completions, enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: Blockline N/S Departure: N/S Departure: Fs_L N/S Departure: Departures L 560.67 N/S Departure: (in feet) L E/W Departure: FE L E/W Departure: E/W Departure: E/W Departure: F L 7135.78 E/W Departure: Lambert X-X: X: 1,947,797.74 coordinates X: Y: Y: Y: -48,515.51 Y: Latitude Latitude Latitude/ Latitude Longitude 28° 31' 59.3862" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0937" W Longitude Water Depth (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: MD (Feet): Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Area X Coordinate Y Coordinate Block Length of Anchor Chain on Seafloor or No. Y = X = Y = X = X =Y = X = X = X = X =X =

Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or Yes No structure, reference previous name): Well No. K006 (ST01BP00) DOCD? Is this an existing well Yes No If this is an existing well or structure, list the 17-709-41245-01 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No API Gravity of For structures, volume of all storage and WCD info For wells, volume of uncontrolled 34° fluid blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 Bottom-Hole Location (For Wells) Completion (For multiple completions, Surface Location enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 Blockline N/S Departure: N/S Departure: N/S Departure: Fs L N/S Departure: Departures L 554.87' N/S Departure: (in feet) E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: L 7135.79 E/W Departure: L X: Lambert X-X: 1,947,797.73 coordinates X: Y: Y: -48,521.31 Y: Latitude Latitude/ Latitude Latitude Latitude Longitude 28° 31' 59.3288" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0938" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor Anchor Name Area or No. X = X = Y = X = X = Y = X = X =X = X =

Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No structure, reference previous name): Well No. K007 (ST00BP01) DOCD? If this is an existing well or structure, list the Is this an existing well Yes 17-709-41246-01 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No WCD info For wells, volume of uncontrolled For structures, volume of all storage and API Gravity of 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid **Bottom-Hole Location (For Wells)** Completion (For multiple completions, Surface Location enter separate lines) OCS OCS Lease No. OCS G 00981 **OCS** Area Name Eugene Island Block No. 237 N/S Departure: Blockline N/S Departure: Fs L N/S Departure: N/S Departure: **Departures** L 566.45' (in feet) N/S Departure: E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: \mathbf{L} 7128.26 E/W Departure: X: Lambert X-X: 1,947,805.26 coordinates X: Y: Y: Y: -48,509.73 Y: Latitude Latitude Latitude/ Latitude Latitude Longitude 28° 31' 59.4435" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0096" W Longitude TVD (Feet): Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Area Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor or No. X =Y =X = Y =X = X = X =X =X =

X =

OCS PLAN INFORMATION FORM (CONTINUED) Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or Yes No structure, reference previous name): Well No. K008 Is this an existing well Yes No If this is an existing well or structure, list the 17-709-41304-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No For structures, volume of all storage and API Gravity of WCD info For wells, volume of uncontrolled 34° fluid blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 Bottom-Hole Location (For Wells) Completion (For multiple completions, **Surface Location** enter separate lines) OCS Lease No. OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 Blockline N/S Departure: N/S Departure: N/S Departure: Fs L N/S Departure: L Departures 566.43' N/S Departure: L (in feet) L E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: $_{\rm L}$ 7120.76 E/W Departure: L X: Lambert X-X: 1,947,812.76 coordinates X: Y: Y: Y: -48,509.75 Y: Latitude Latitude/ Latitude Latitude Latitude Longitude 28° 31' 59.4433" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9255" W Longitude TVD (Feet): Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor Anchor Name Area or No. Y = X = Y = X = X = Y= X = X =X =

X = X =

Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or Yes No structure, reference previous name): Well No. K009 Is this an existing well Yes If this is an existing well or structure, list the 17-709-41313-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No For wells, volume of uncontrolled For structures, volume of all storage and API Gravity of WCD info 34° fluid blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 **Surface Location Bottom-Hole Location (For Wells)** Completion (For multiple completions, enter separate lines) OCS Lease No. OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 Blockline N/S Departure: Fs_L N/S Departure: N/S Departure: N/S Departure: L **Departures** 554.85' N/S Departure: L (in feet) E/W Departure: E/W Departure: FE_L E/W Departure: E/W Departure: L 7128.29' E/W Departure: L X: Lambert X-X: 1,947,805.23 coordinates X: Y: Y: Y: -48,521.33 Y: Latitude Latitude/ Latitude Latitude Latitude Longitude 28° 31' 59.3286" N Latitude Longitude Longitude Longitude Longitude 91° 29' 45.0098" W Longitude Water Depth (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): Anchor Radius (if applicable) in feet: Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor Area or No. X = Y = X = Y = X = X = X =X =X =


Proposed Well/Structure Location													
Well or Structus structure, refere	re Name/Nu ence previous	mber (If re s name): W	naming well or /ell No. K010		Previ DOC	iously reviewed D?	under an app	roved EP o	r X	Yes		No	
Is this an existi or structure?	ng well	Ye				existing well on the control of the	r structure, lis	st the	17-7	17-709-41311-00			
Do you plan to use a subsea BOP or a surface BOP on a float					ting fac	ility to conduct	your propose	d activities	?	Ye	S	X No	
WCD info						tures, volume o (Bbls): 0	•		fluid	Gravity o		34°	
	Surface Lo	cation			Bottom-Hole Location (For Wells)					Completion (For multiple completions, enter separate lines)			
Lease No.	OCS G 00981				OCS					OCS OCS			
Area Name		Eugene	Island										
Block No.		23											
Blockline Departures (in feet)	N/S Departs 560.65		F <u>s</u>]		N/S I	Departure:		F L	N/S Departure: FL N/S Departure: FL N/S Departure: FL				
	E/W Departure: F _E L 7128.28'					Departure:		FL	E/W Departure: F_ L E/W Departure: F_ L			FL	
Lambert X- Y coordinates	x: 1,947,805.24					X:				X: X: X:			
	-48,515.53					Y					Y: Y: Y:		
Latitude/ Longitude	/	1' 59.3	3860" N		Latitude					Latitude Latitude Latitude			
		9' 45.0	0097" W							Longitude Longitude Longitude			
Water Depth (F 139'	eet):				MD (Feet): TVD (Feet):				(Feet): (Feet):		TVD (Feet): TVD (Feet):		
Anchor Radius	(if applicable	e) in feet:								(Feet):		TVD (Feet):	
Anchor Loc	ations for	Drilling	Rig or Const	ruct	ion B	arge (If ancho	r radius sup	plied abov	e, not n	ecessar	y)		
Anchor Name or No.	Area	Block	X Coordinate			Y Coordinate		Len	gth of A	Anchor	Chair	on Seafloor	
			X =			Y =							
			X =			Y =							
			X =			Y =							
			X =			Y =							
			X =			Y =							
			X =			Y =							
			X =			Y =							
	X =			Y =									


Proposed Well/Structure Location Previously reviewed under an approved EP or Well or Structure Name/Number (If renaming well or No Yes structure, reference previous name): Well No. K011 DOCD? If this is an existing well or structure, list the Is this an existing well Yes 17-709-41391-00 or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No WCD info For wells, volume of uncontrolled For structures, volume of all storage and API Gravity of 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid Completion (For multiple completions, Surface Location **Bottom-Hole Location (For Wells)** enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: Blockline N/S Departure: Fs_L N/S Departure: N/S Departure: _ L Departures 560.63' N/S Departure: (in feet) E/W Departure: FE L E/W Departure: E/W Departure: E/W Departure: 7120.78 E/W Departure: X: X: Lambert X-X: 1,947,812.74 coordinates X: Y: Y: Y: -48,515.55 Y: Latitude Latitude Latitude Latitude/ Latitude Longitude 28° 31' 59.3859" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9256" W Longitude Water Depth (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: MD (Feet): TVD (Feet): Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) X Coordinate Area Block Y Coordinate Length of Anchor Chain on Seafloor Anchor Name or No. X = Y = X = X =Y = X = Y =X = X =X =

Proposed Well/Structure Location Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No structure, reference previous name): Well No. K012 DOCD? N-9980 No If this is an existing well or structure, list the Is this an existing well Yes or structure? Complex ID or API No. Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No X WCD info For wells, volume of uncontrolled For structures, volume of all storage and API Gravity of 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid **Surface Location** Bottom-Hole Location (For Wells) Completion (For multiple completions, enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 Blockline N/S Departure: N/S Departure: N/S Departure: Fs_L L N/S Departure: Departures L 554.83' N/S Departure: L (in feet) E/W Departure: E/W Departure: FE L E/W Departure: E/W Departure: L 7120.79 E/W Departure: X: X: Lambert X-X: 1,947,812.73 coordinates X: Y: Y: -48,521.35 Y: Latitude Latitude Latitude/ Longitude Latitude 28° 31' 59.3285" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9257" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: MD (Feet): TVD (Feet): Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) X Coordinate Area Block Y Coordinate Length of Anchor Chain on Seafloor Anchor Name or No. X = X = X = X = X = Y = X =X =

OCS PLAN INFORMATION FORM (CONTINUED)

Include one copy of this page for each proposed well/structure **Proposed Well/Structure Location** Well or Structure Name/Number (If renaming well or Previously reviewed under an approved EP or No Yes N-9980 structure, reference previous name): Well No. K013 DOCD? If this is an existing well or structure, list the Is this an existing well Yes Complex ID or API No. or structure? Do you plan to use a subsea BOP or a surface BOP on a floating facility to conduct your proposed activities? Yes No For structures, volume of all storage and API Gravity of WCD info For wells, volume of uncontrolled 34° blowout (Bbls/day): 20,584 bbls pipelines (Bbls): 0 fluid Bottom-Hole Location (For Wells) Completion (For multiple completions, **Surface Location** enter separate lines) Lease No. OCS OCS OCS G 00981 OCS Area Name Eugene Island Block No. 237 N/S Departure: N/S Departure: Blockline Fs_L N/S Departure: N/S Departure: F Departures __ L 554.83' N/S Departure: (in feet) E/W Departure: FE L E/W Departure: E/W Departure: E/W Departure: L 7120.79 E/W Departure: X: Lambert X-X: 1,947,812.73 coordinates X: Y: Y: Y: -48,521.35 Y: Latitude Latitude Latitude Latitude/ Latitude Longitude 28° 31' 59.3285" N Latitude Longitude Longitude Longitude Longitude 91° 29' 44.9257" W Longitude Water Depth (Feet): MD (Feet): TVD (Feet): MD (Feet): TVD (Feet): TVD (Feet): MD (Feet): TVD (Feet): Anchor Radius (if applicable) in feet: MD (Feet): Anchor Locations for Drilling Rig or Construction Barge (If anchor radius supplied above, not necessary) Anchor Name Area Block X Coordinate Y Coordinate Length of Anchor Chain on Seafloor or No. Y =X = Y = X = Y = X = Y = X = X = X =X =X =

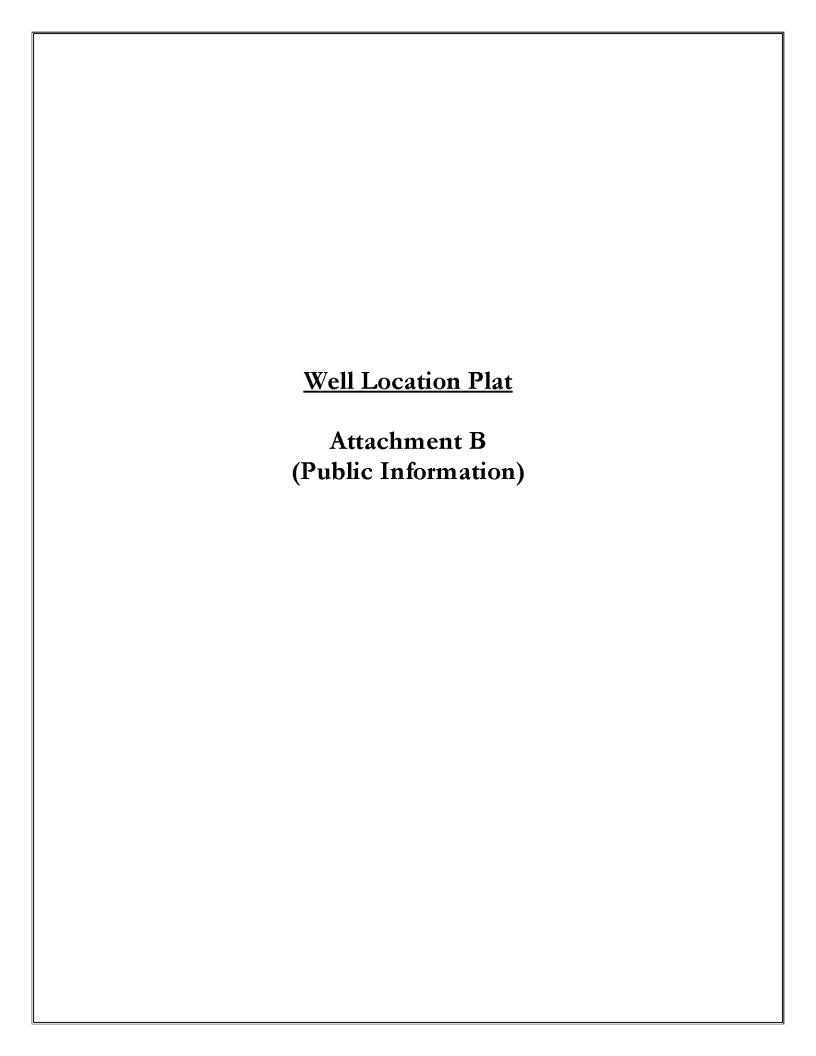

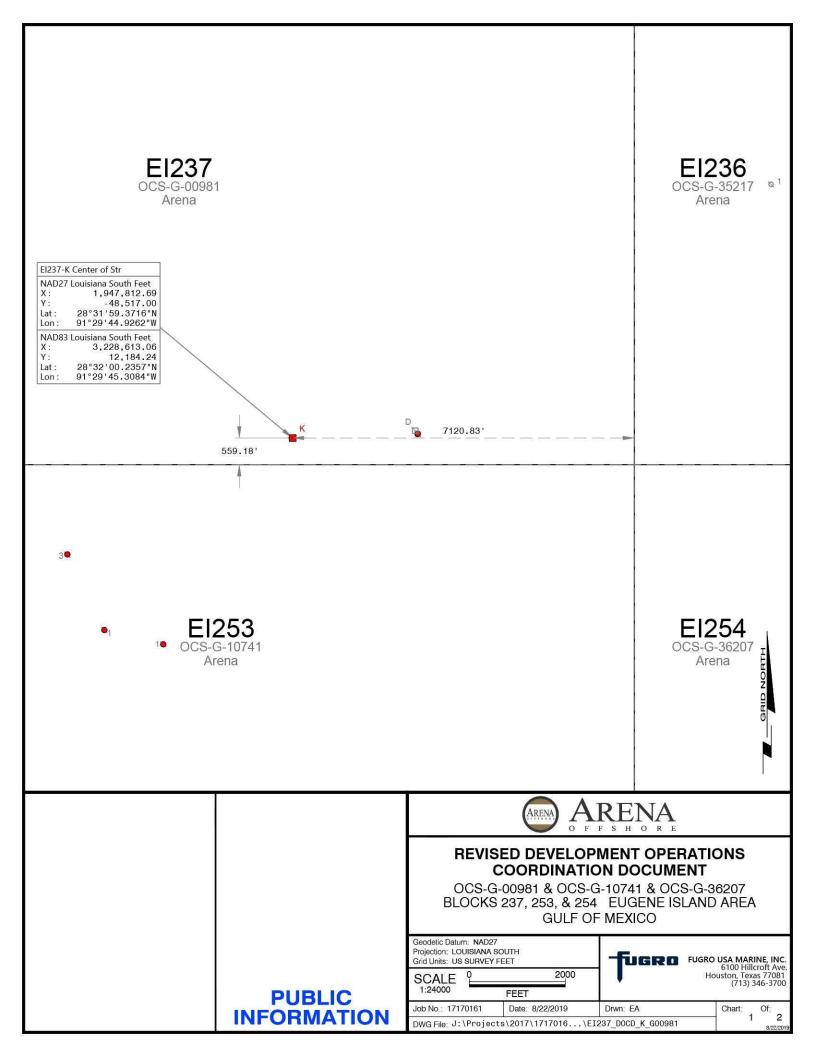

				/ELL LOCATIONS 7 LOUISIANA SOUTI	Н			
LOCATION	BLOCK	CALLNS	CALLEW	X COORDINATE	Y COORDINATE	LATITUDE	LONGITUDE	WD
K001 Surf (KD)	EI237	549.07' FSL	7135.81' FEL	1,947,797.71	-48,527.11	28°31'59.2713"N	91°29'45.0939"W	139
K002 Surf (KB)	EI237	549.05' FSL	7128.31' FEL	1,947,805.21	-48,527.13	28°31'59.2712"N	91°29'45.0099"W	139
K003 Surf (KC)	EI237	549.03' FSL	7120.81' FEL	1,947,812.71	-48,527.15	28°31'59.2711"N	91°29'44.9258"W	139
K004 Surf (KG)	EI237	566.47' FSL	7135.76' FEL	1,947,797.76	-48,509.71	28°31'59.4436"N	91°29'45.0936"W	139
K005 Surf (KA)	EI237	560.67' FSL	7135.78' FEL	1,947,797.74	-48,515.51	28°31'59.3862"N	91°29'45.0937"W	139
K006 Surf (KE)	EI237	554.87' FSL	7135.79' FEL	1,947,797.73	-48,521.31	28°31'59.3288"N	91°29'45.0938"W	139
K007 Surf (KH)	EI237	566.45' FSL	7128.26' FEL	1,947,805.26	-48,509.73	28°31'59.4435"N	91°29'45.0096"W	139
K008 Surf (KI)	EI237	566.43' FSL	7120.76' FEL	1,947,812.76	-48,509.75	28°31'59.4433"N	91°29'44.9255"W	139
K009 Surf (KF)	EI237	554.85' FSL	7128.29' FEL	1,947,805.23	-48,521.33	28°31'59.3286"N	91°29'45.0098"W	139
K010 Surf (KJ)	EI237	560.65' FSL	7128.28' FEL	1,947,805.24	-48,515.53	28°31'59.3860"N	91°29'45.0097"W	139
K011 Surf (KK)	EI237	560.63' FSL	7120.78' FEL	1,947,812.74	-48,515.55	28°31'59.3859"N	91°29'44.9256"W	139
K012 Surf (KL)	EI237	554.83' FSL	7120.79' FEL	1,947,812.73	-48,521.35	28°31'59.3285"N	91°29'44.9257"W	139
K013 Surf (KM)	EI237	554.83' FSL	7120.79' FEL	1,947,812.73	-48,521.35	28°31'59.3285"N	91°29'44.9257"W	139



REVISED DEVELOPMENT OPERATIONS COORDINATION DOCUMENT


OCS-G-00981 & OCS-G-10741 & OCS-G-36207 BLOCKS 237, 253, & 254 EUGENE ISLAND AREA GULF OF MEXICO


PUBLIC INFORMATION


Geodetic Datum: NAD27 Projection: LOUISIANA SOUTH Grid Units: US SURVEY FEET	-fugeo	FUGRO USA MARINE, II
	•	Houston, Texas 77((713) 346-3
No. 9 - 1980 South Control March Control March Control March Control March Control Con		10.00


 Job No.:
 17170161
 Date:
 8/22/2019
 Drwn:
 EA


 DWG File:
 J:\Projects\2017\1717016...\EI237_D0CD_K_G00981

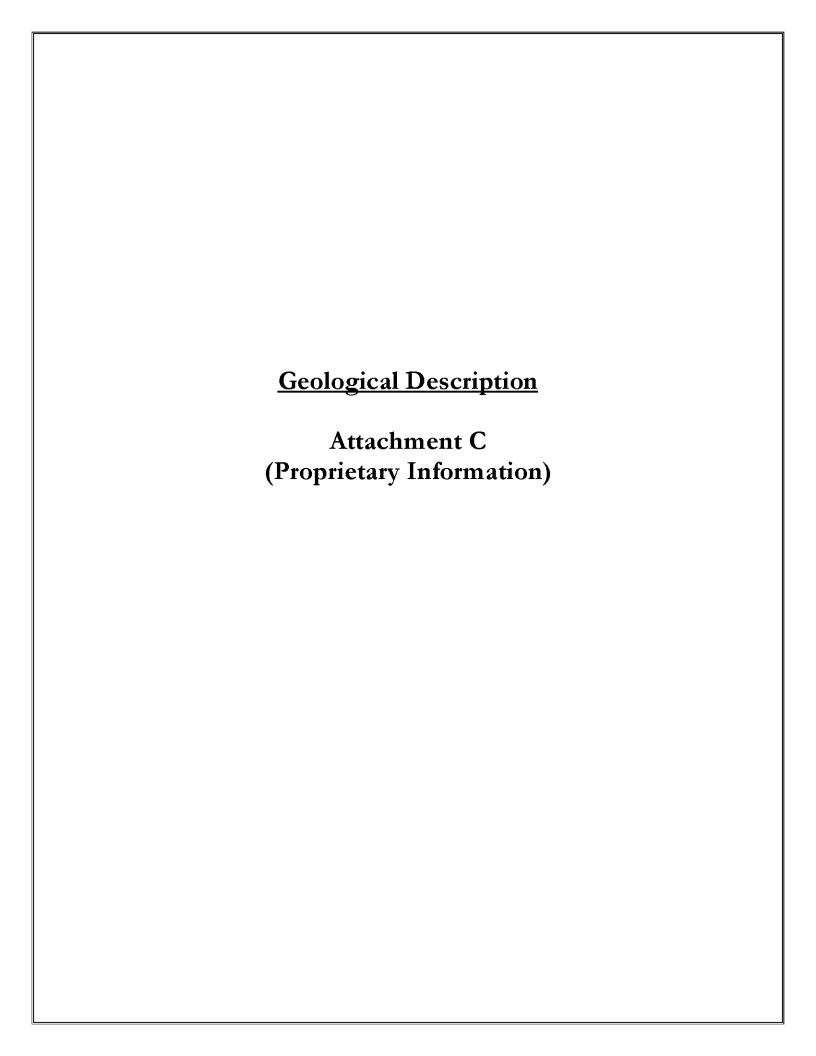

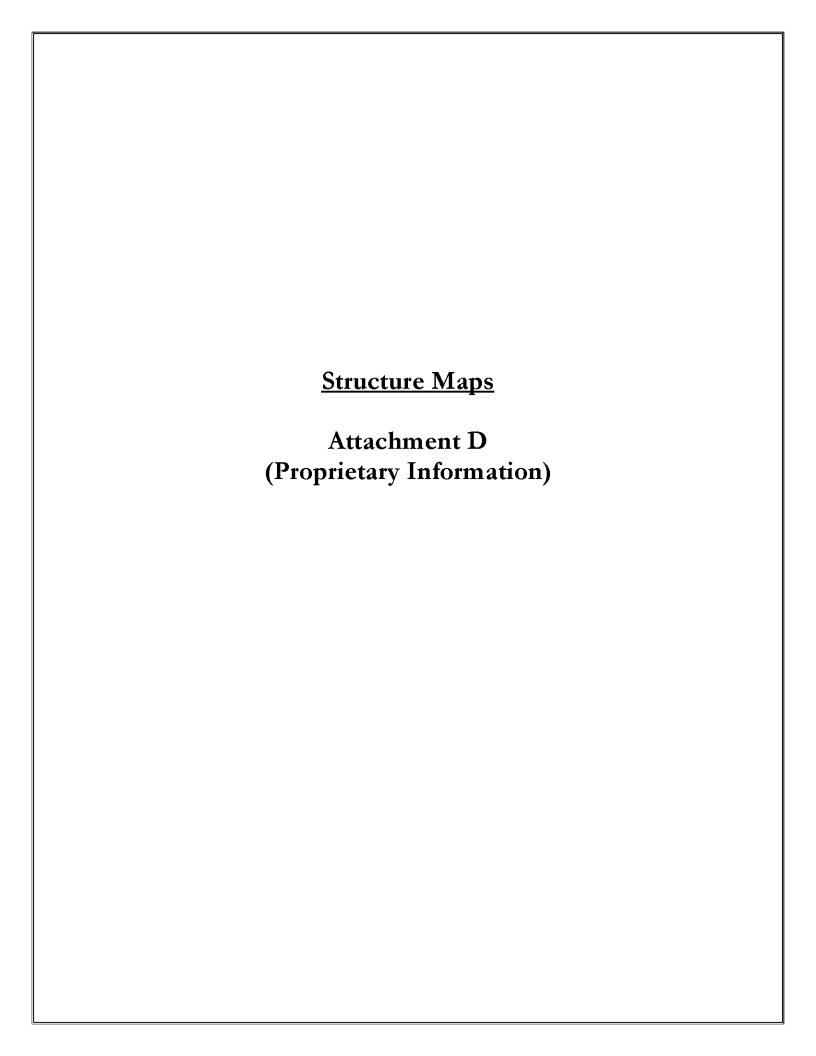

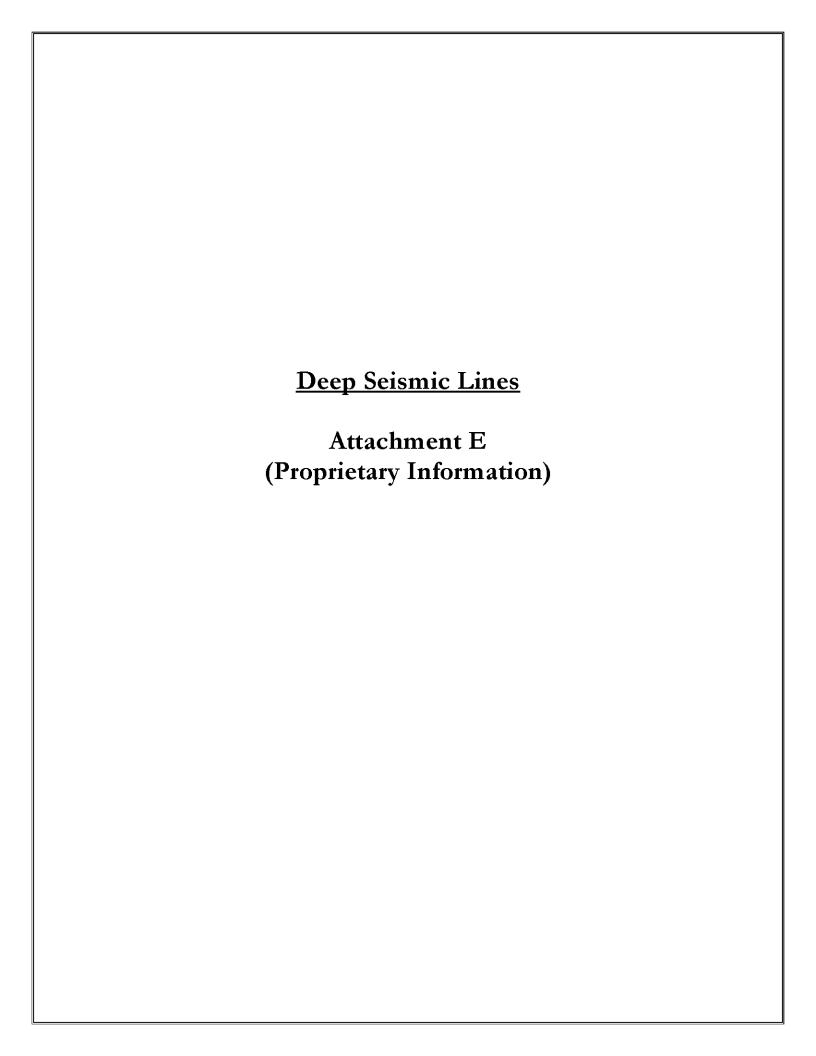

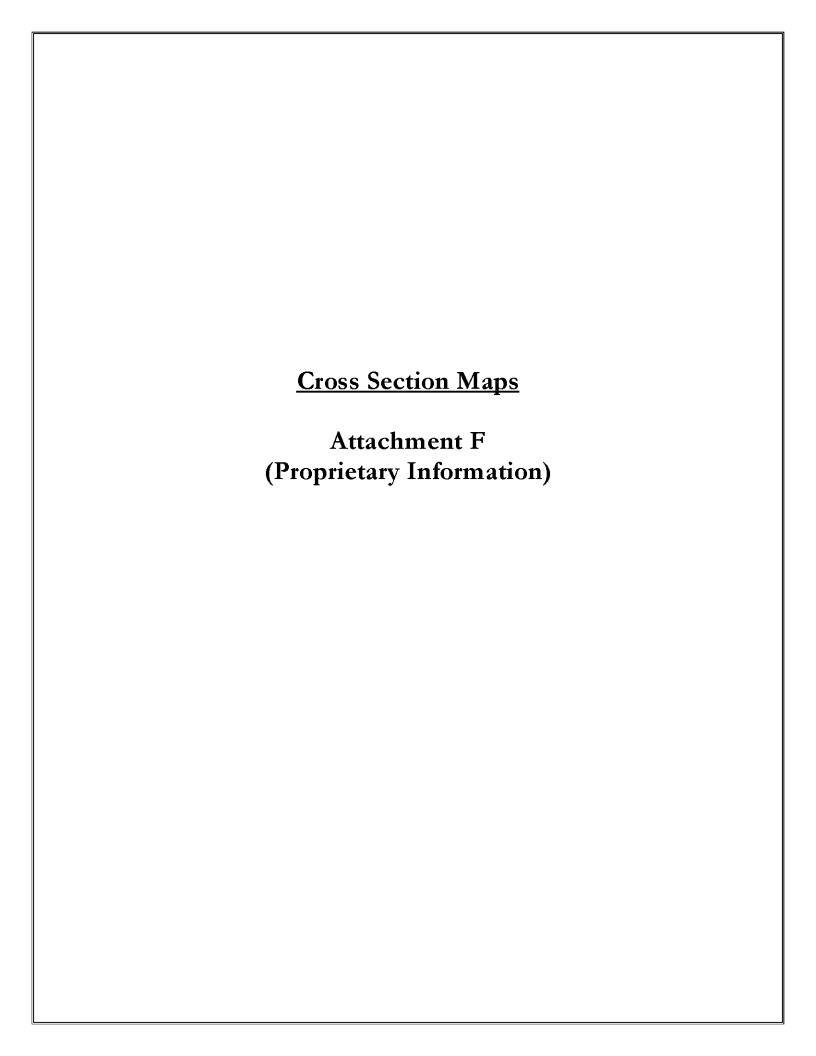

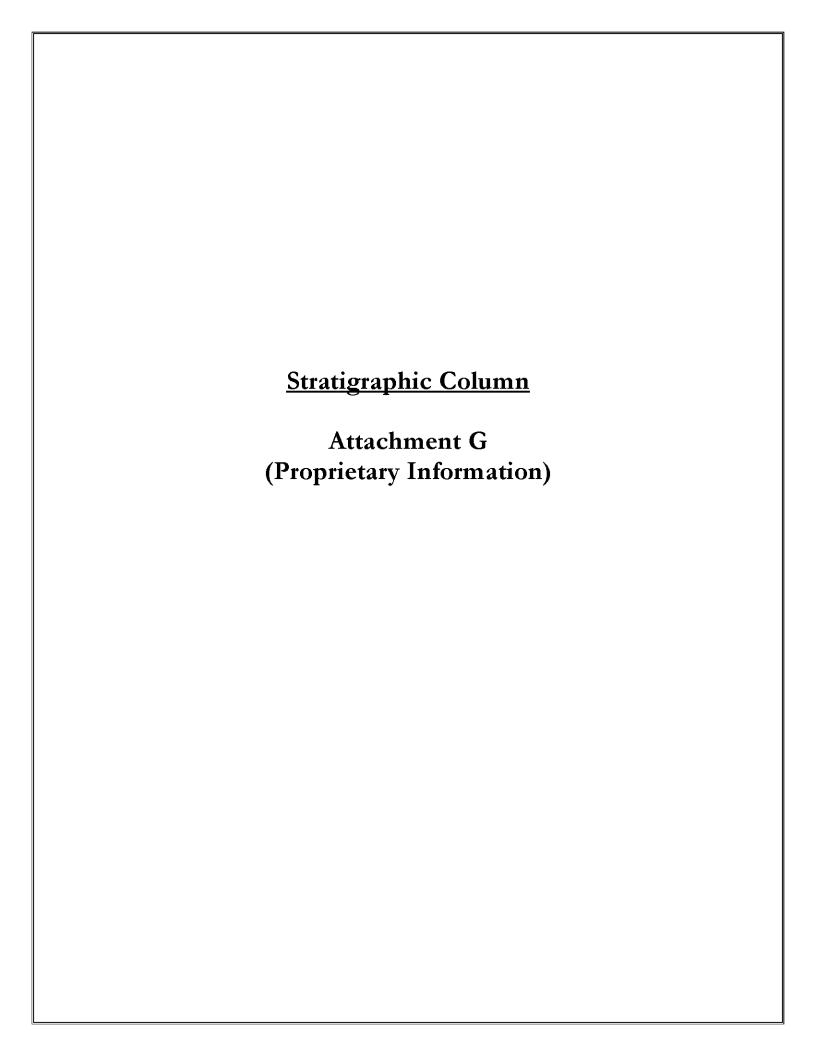



Gulf of Mexico's Threatened and Endangered Species

For more information on listed species please visit: http://www.nmfs.noaa.gov/pr/species/esa/listed.htm http://sero.nmfs.noaa.gov/protected_resources/index.html

Marine Mammal Species	Scientific Name	Status
fin whale	Balaenoptera physalus	Endangered
sei whale	Balaenoptera borealis	Endangered
sperm whale	Physeter macrocephalus	Endangered
Gulf of Mexico Bryde's whale	Balaenoptera edeni - subspecies	Proposed - Endangered
Sea Turtle Species		9
green sea turtle	Chelonia mydas	Threatened ¹
hawksbill sea turtle	Eretmochelys imbricata	Endangered
Kemp's ridley sea turtle	Lepidochelys kempii	Endangered
leatherback sea turtle	Dermochelys coriacea	Endangered
loggerhead sea turtle	Caretta caretta	Threatened ²
Fish Species		
Gulf sturgeon	Acipenser oxyrinchus desotoi	Threatened
Nassau grouper	Epinephelus striatus	Threatened
smalltooth sawfish	Pristis pectinata	Endangered ³
oceanic whitetip shark	Carcharhinus longimanus	Threatened
giant manta ray	Manta birostris	Threatened
Invertebrate Species		
rough cactus coral	Mycetophyllia ferox	Threatened ⁴
pillar coral	Dendrogyra cylindrus	Threatened ⁴
lobed star coral	Orbicella annularis	Threatened
mountainous star coral	Orbicella faveolata	Threatened
boulder star coral	Orbicella franksi	Threatened
staghorn coral	Acropora cervicornis	Threatened ⁴
elkhorn coral	Acropora palmata	Threatened ⁵

¹ North Atlantic and South Atlantic Distinct Population Segments.

² Northwest Atlantic Distinct Population Segment. ³ U.S. Distinct Population Segment

⁴Colonies located at Dry Tortugas National Park.

⁵ Colonies located at Flower Garden Banks National Marine Sanctuary and Dry Tortugas National Park.



Critical Habitat Designations

For final rules, maps, and GIS data please visit: http://sero.nmfs.noaa.gov/maps gis data/protected resources/critical habitat/index.html

Loggerhead sea turtle: There are 38 designated marine areas that occur throughout the Southeast Region.

Gulf sturgeon: There are 14 marine and estuarine units located in Northwest Florida, Alabama, Mississippi, and eastern Louisiana.

Smalltooth sawfish: There are two habitat units located in Charlotte Harbor and in the Ten Thousand Islands/Everglades, Florida.

Species Proposed for Listing Under the Endangered Species Act

Federal action agencies are encouraged to include species proposed for listing under the Endangered Species Act (ESA) in their Section 7 consultation requests. Species that are proposed for listing are those which have been found to warrant federal protection under the ESA, but a final rule formally listing the species has not yet published. By including these species in your Section 7 consultation, reinitiating consultation after the ESA listing is finalized may not be necessary.

For more information on species proposed for listing under the ESA, please visit: http://www.nmfs.noaa.gov/pr/species/esa/candidate.htm#proposed

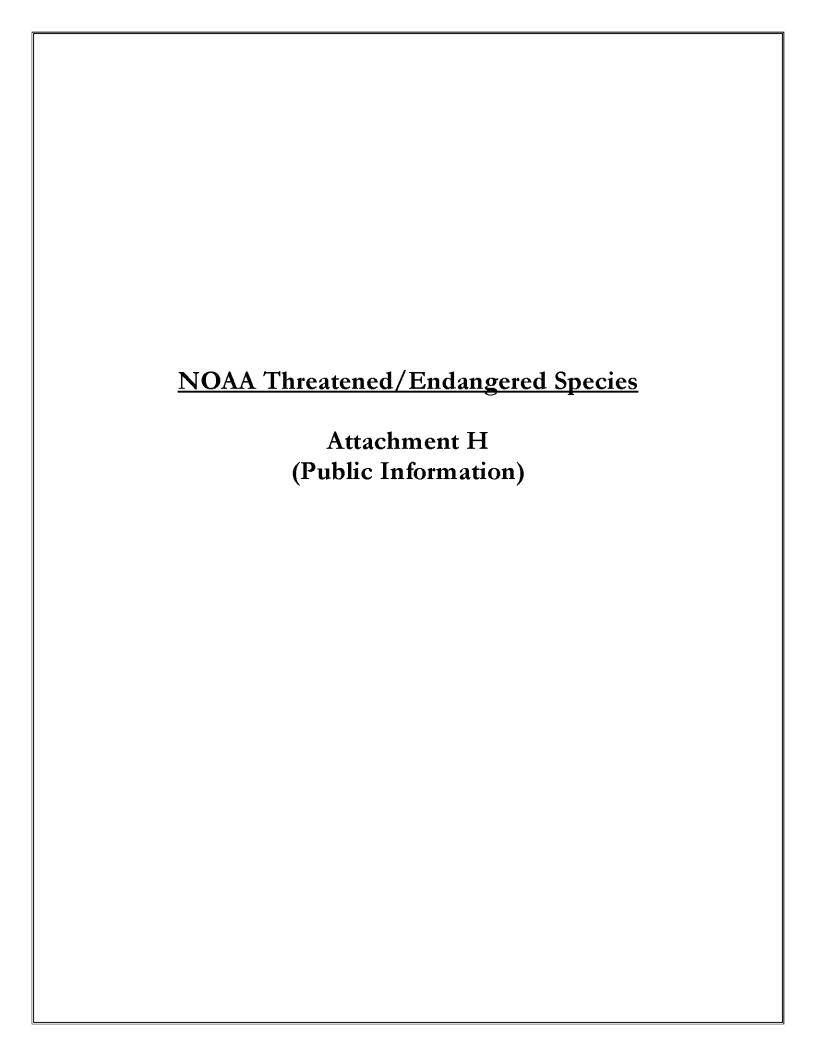



TABLE 1. WASTES YOU WILL GENERATE, TREAT AND DOWNHOLE DISPOSE OR DISCHARGE TO THE GOM

please specify if the amount reported is a total or per well amount

					Projected Downhole
Projected ge	nerated waste		Projected oc	ean discharges	Disposal
Type of Waste and Composition	Composition	Projected Amount	Discharge rate	Discharge Method	Answer yes or no
Will drilling occur ? If yes, you should list muds and cutting	gs				
Water-based drilling fluid	barite, additives	4000 bbls/well	500 bbls/day/well	discharge overboard	No
Cuttings wetted with water-based fluid	water-based fluids	2100 bbls/well	300 bbls/day/well	discharge overboard	No
Cuttings wetted with synthetic-based fluid Brine	Cuttings generated while using synthetic based drilling fluid. Brine	1280 bbls/well 10,000 bbls total	40 bbls/day/well	Shunt through downpipe	No
Will humans be there? If yes, expect conventional waste			25		
Domestic waste (kitchen water, shower water)	grey water	30 gal/person/day	NA NA	Remove floating solids and discharge	No No
Sanitary waste (toilet water)	treated sanitary waste	20 gal/person/day	INA	Chlorinate and discharge	INO
Is there a deck? If yes, there will be Deck Drainage		7			
Deck Drainage	wash water and rainwater	1000 bbl (dependent on rainfall)	15 bbl/hr	discharge overboard	No
Will you conduct well treatment, completion, or workover?	Special control of the	Too De (de portagni en rainan)	10 0000	allocated and the second	
well treatment fluids	NA	NA	NA	NA	NA
well completion fluids	Calcium Chloride	200 bbls/well	25 bbls/hr (1 day per well)	NA	NA
workover fluids	NA	NA	NA	NA	NA
Miscellaneous discharges. If yes, only fill in those associate	ed with your activity.				
Desalinization unit discharge	NA	NA	NA	NA	NA
Blowout prevent fluid	NA	NA	NA	NA	NA
Ballast water	NA	NA	NA	NA	NA
Bilge water	NA	NA	NA	NA	NA
Excess cement at seafloor	NA	NA	NA	NA	NA
Fire water	NA	NA	NA	NA	NA
Cooling water	NA	NA	NA	NA	NA
Will you produce hydrocarbons? If yes fill in for produced	Table 1990 And 1990			200	000
Produced water	formation water	None Discharged	NA	NA	NA
Will you be covered by an individual or general NPDES per	mit ?		GENERAL PERMIT	GMG290269	

TABLE 2. WASTES YOU WILL TRANSPORT AND /OR DISPOSE OF ONSHORE please specify whether the amount reported is a total or per well

	Projected generate	Projected generated waste			Waste Disposal					
	Type of Waste	Composition		Transport Method	Name/Location of Facility	Amount	Disposal Method			
Wi	ll drilling occur ? If yes, fill in the muds and	cuttings.								
	Oil-based drilling fluid or mud	NA		NA	NA	NA	NA			
	Synthetic-based drilling fluid or mud	used SBF and additives		cuttings boxes on supply boat	Newpark Environmental in Fourchon, LA	1700 bbls/well	Recycled			
	Cuttings wetted with Water-based fluid	NA		NA	NA	NA	NA			
	Cuttings wetted with Synthetic-based fluid	NA		NA	NA	NA	NA			
	Cuttings wetted with oil-based fluids	NA		NA	NA	NA	NA			
Wi	ll you produce hydrocarbons? If yes fill in for	produced sand.								
	Produced sand	NA		NA	NA	NA	NA			
0.0000000000000000000000000000000000000	l Il you have additional wastes that are not per in the appropriate rows.	mitted for discharge? If yes,								
	trash and debris	trash and debris		storage bins on supply boat	Grand Isle Shipyard, Port Fourchon, LA	500 cu ft total	landfill			
	used oil	NA		drums on supply boat	NA	NA	NA			
	wash water	NA		NA	NA	NA	NA			
	chemical product wastes	NA		NA	NA	NA	NA			
	5									

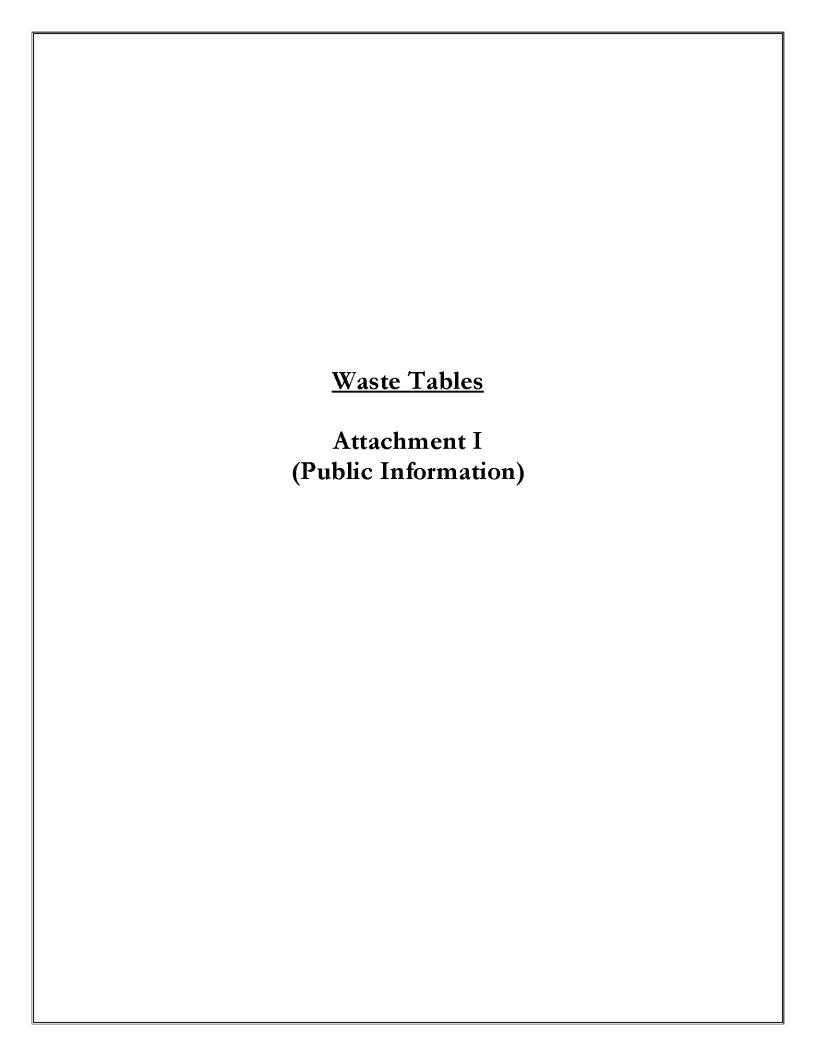

OMB Control No. 1010-0151 OMB Approval Expires: 03/31/2018

COMPANY	Arena Offshore, LP
AREA	Eugene Island
BLOCK	237/253/254
LEASE	OCS-G 00981/10741/36207
PLATFORM	Platform K
WELL	K001 thorugh K013 Wells
COMPANY CONTACT	Aimee Deady
TELEPHONE NO.	281-210-3180
REMARKS	Sidetrack drill, drill, complete, and produce K wells

LEASE TER	LEASE TERM PIPELINE CONSTRUCTION INFORMATION:												
YEAR	NUMBER OF PIPELINES	TOTAL NUMBER OF CONSTRUCTION DAYS											
2017													
2018													
2019													
2020		None											
2021													
2022													
2023													
2024 - 2033													

AIR EMISSIONS CUMPUTATION FACTORS

Fuel Usage Conversion Factors	Natural Gas 7	Γurbines	Natural Gas I	Engines	Diesel Reci	p. Engine	REF.	DATE
	SCF/hp-hr	9.524	SCF/hp-hr	7.143	GAL/hp-hr	0.0483	AP42 3.2-1	4/76 & 8/84
Equipment/Emission Factors	units	PM	SOx	NOx	VOC	CO	REF.	DATE
NG Turbines	gms/hp-hr		0.00247	1.3	0.01	0.83	AP42 3.2-1& 3.1-1	10/96
NG 2-cycle lean	gms/hp-hr		0.00185	10.9	0.43	1.5	AP42 3.2-1	10/96
NG 4-cycle lean	gms/hp-hr		0.00185	11.8	0.72	1.6	AP42 3.2-1	10/96
NG 4-cycle rich	gms/hp-hr		0.00185	10	0.14	8.6	AP42 3.2-1	10/96
Diesel Recip. < 600 hp.	gms/hp-hr	1	1.468	14	1.12	3.03	AP42 3.3-1	10/96
Diesel Recip. > 600 hp.	gms/hp-hr	0.32	1.468	11	0.33	2.4	AP42 3.4-1	10/96
Diesel Boiler	lbs/bbl	0.084	2.42	0.84	0.008	0.21	AP42 1.3-12,14	9/98
NG Heaters/Boilers/Burners	lbs/mmscf	7.6	0.593	100	5.5	84	P42 1.4-1, 14-2, & 14	7/98
NG Flares	lbs/mmscf		0.593	71.4	60.3	388.5	AP42 11.5-1	9/91
Liquid Flaring	lbs/bbl	0.42	6.83	2	0.01	0.21	AP42 1.3-1 & 1.3-3	9/98
Tank Vapors	lbs/bbl	-			0.03		E&P Forum	1/93
Fugitives	lbs/hr/comp.				0.0005		API Study	12/93
Glycol Dehydrator Vent	lbs/mmscf				6.6		La. DEQ	1991
Gas Venting	lbs/scf				0.0034			

Sulphur Content Source	Value	Units
Fuel Gas	3.33	ppm
Diesel Fuel	0.4	% weight
Produced Gas(Flares)	3.33	ppm
Produced Oil (Liquid Flaring)	1	% weight

Screening Questions for DOCD's	Yes	No
Is any calculated Complex Total (CT) Emission amount (in tons associated with		
your proposed exploration activities more than 90% of the amounts calculated		
using the following formulas: CT = 3400D ^{2/3} for CO, and CT = 33.3D for the		^
other air pollutants (where D = distance to shore in miles)?		
Does your emission calculations include any emission reduction measures or		Y
modified emission factors?		^
Does or will the facility complex associated with your proposed development and	X	24.00
production activities process production from eight or more wells?		
Do you expect to encounter H ₂ S at concentrations greater than 20 parts per million		X
(ppm)?		
Do you propose to flare or vent natural gas in excess of the criteria set forth under		X
250.1105(a)(2) and (3)?		
Do you propose to burn produced hydrocarbon liquids?		X
Are your proposed development and production activities located within 25 miles		X
from shore?		- 24
Are your proposed development and production activities located within 200		×
kilometers of the Breton Wilderness Area?		_ ^

Air Pollutant	Plan Emission Amounts ¹ (tons)	Calculated Exemption Amounts ² (tons)		Calculated Complex Total Emission Amounts ³ (tons)
Carbon monoxide (CO)		29069.59		
Particulate matter (PM)		832.5		
Sulphur dioxide (SO ₂)		832.5	0 0	
Nitrogen oxides (NOx)		832.5	36	
Volatile organic compounds (VOC)		832.5		

¹ For activities proposed in your EP or DOCD, list the projected emissions calculated from the worksheets.

 $^{^2}$ List the exemption amounts in your proposed activities calculated using the formulas in 30 CFR 250.303(d).

³ List the complex total emissions associated with your proposed activities calculated from the worksheets.

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Arena Offshore, LP	Eugene Island	237/253/254	OCS-G 00981/	Platform K	K001 thorugh	K013 Wells		Aimee Deady		281-210-3180	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMU	I POUNDS F	PER HOUR			ES ⁻	TIM ATED TO	NS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR	SCF/HR	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	VOC	CO
DRILLING	PRIME MOVER>600hp diesel	8800	425 04	10200 96	24	333	6 20	28 45	213 22	6 40	46 52	24 79	113 70	852 01	25 56	185 89
	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
WFD 250, 300, or	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
350	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	BURNER diesel	0			0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	AUXILIARY EQUIP<600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	2600	125 58	3013 92	8	190	1 83	8 4 1	63 00	1 89	13 74	1 39	6 3 9	47 88	1 44	10 45
	VESSELS>600hp diesel(supply)	2600	125 58	3013 92	8	143	1 83	8 4 1	63 00	1 89	13 74	1 05	4 81	36 03	1 08	7 86
	VESSELS>600hp diesel(tugs)	4600	222 18	5332 32	12	2	3 24	14 87	111 45	3 34	24 32	0 04	0 18	1 34	0 04	0 29
PIPELINE	PIPELINE LAY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	SUPPORT VESSEL diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	PIPELINE BURY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(supply)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
FACILITY	DERRICK BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	MATERIAL TUG diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(supply)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
PRODUCTION	RECIP <600hp diesel (Crane)	160	7 728	185 47	3	260	0 35	0 52	4 93	0 39	1 07	0 14	0 20	1 92	0 15	0 42
	RECIP >600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel	2600	125 58	3013 92	6	104	1 83	8 4 1	63 00	1 89	13 74	0 57	2 62	19 65	0 59	4 29
	TURBINE nat gas (generator)	235	2238 14	53715 36	24	365		0 00	0 67	0 01	0 43		0 01	2 95	0 02	1 88
	RECIP 2 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rìch nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle nch nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	BURNER natigas (heater freater) : :	0	0 00	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	MISC.	BPD	SCF/HR	COUNT							1					
	TANK-	0			0	0				0 00					0 00	
	FLARE-		0		0	0		0 00	0 00	0 00	0 00	I	0 00	0 00	0 00	0 00
	PROCESS VENT-		0		0	0				0 00					0 00	
	FUGITIVES-			1000 0		365		1		0 50					2 19	
D.D.H.I.N.I.G	GLYCOL STILL VENT-		0		0	0				0 00			0.77	0.55	0 00	0
DRILLING WELL TEST	OIL BURN GAS FLARE	0	0		0	0	0 00	0 00 0 00	0 00 0 00	0 00	0 00	0 00	0 00 0 00	0 00 0 00	0 00 0 00	0 00 0 00
	YEAR TOTAL						15.30	69.07	519.26	16.31	113.57	27.97	127.91	961.78	31.07	211.08
	TEAR TOTAL						10.50	09.01	319.20	10.31	113.57	21.51	121.31	301.70	31.07	211.00
EXEMPTION CALCULATION	DISTANCE FROM LAND IN MILES											1631.70	1631.70	1631.70	1631.70	45527.76
	490															


COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Arena Offshore, LP	Eugene Island	237/253/254	OCS-G 00981/	Platform K	K001 thorugh K	013 Wells		Aimee Deady		281-210-3180	#REFI					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMUN	I POUNDS F	PER HOUR			ES.	TIMATED TO	NS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR	SCF/HR	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	VOC	co
DRILLING	PRIME MOVER>600hp diesel	8800	425 04	10200 96	24	365	6 20	28 45	213 22	6 4 0	46 52	27 17	124 63	933 89	28 02	203 76
	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
350	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	BURNER diesel	0			0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	AUXILIARY EQUIP<600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	2600	125 58	3013 92	8	208	1 83	8 41	63 00	1 89	13 74	1 52	6 99	52 4 1	1 57	11 44
	VESSELS>600hp diesel(supply)	2600	125 58	3013 92	8	156	1 83	8 4 1	63 00	1 89	13 74	1 14	5 25	39 31	1 18	8 58
	VESSELS>600hp diesel(tugs)	4600	222 18	5332 32	12	2	3 24	14 87	111 45	3 34	24 32	0 04	0 18	1 34	0 04	0 29
PIPELINE	PIPELINE LAY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	SUPPORT VESSEL diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	PIPELINE BURY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel VESSELS>600hp diesel(crew)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00 0 00	0 00	0 00	0 00	0 00 0 00	0 00 0 00
	VESSELS>600hp diesel(diew)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	v Essets/outly diesel(supply)	Ü	V	0.00	0	Ů	0 00	0 00	0 00	0.00	0 00	0 00	0 00	0 00	0 00	0 00
FACILITY	DERRICK BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	MATERIAL TUG diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(supply)	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
PRODUCTION	RECIP <600hp diesel (Crane)	160	7 728	185 47	3	260	0 35	0 52	4 93	0 39	1 07	0 14	0 20	1 92	0 15	0 42
	RECIP >600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel	2600	125 58	3013 92	6	104	1 83	8 41	63 00	1 89	13 74	0 57	2 62	19 65	0 59	4 29
	TURBINE nat gas (generator)	235	2238 14	53715 36	24	365		0 00	0 67	0 01	0 4 3		0 01	2 95	0 02	1 88
	RECIP 2 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	BURNER natigas (the ater (reater) ; ; MISC.	0 BPD	0 00 SCF/HR	0 00 COUNT	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	TANK-	0	SCF/HR	COUNT	0	0				0 00			Ι		0 00	
	FLARE-	J	0		0	0		0.00	0.00	0 00	0 00		0.00	0.00	0.00	0 00
	PROCESS VENT-		0		0	0		""	000	0 00	0 00		000		0 00	0 00
	FUGITIVES-			1000 0	J	365				0.50					2 19	
	GLYCOL STILL VENT-		000000000000000000000000000000000000000	10000	0	0				0 00					0 00	
DRILLING	OIL BURN	0			0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
WELL TEST	GAS FLARE		0		0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
2021	YEAR TOTAL	1					15.30	69.07	519.26	16.31	113.57	30.58	139.88	1051.47	33.76	230.65
EXEMPTION																
CALCULATION	DISTANCE FROM LAND IN MILES											1631.70	1631.70	1631.70	1631.70	45527.76
	49 0															

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Arena Offshore, LP	Eugene Island	237/253/254	OCS-G 00981/	Platform K	K001 thorugh K	013 Wells		Aimee Deady		281-210-3180	#REF!					
OPERATIONS	EQUIPM ENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMUN	I POUNDS F	PER HOUR			ES ⁻	TIM ATED TO	NS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR	SCF/HR	SCF/D	HR/D	DAYS	PM	SOx	NOx	voc	co	PM	SOx	NOx	voc	co
DRILLING	PRIME MOVER>600hp diesel	8800	425 04	10200 96	24	365	6 20	28 45	213 22	6 40	46 52	27 17	124 63	933 89	28 02	203 76
	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00	0 00	0 00
350	PRIME MOVER>600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00	0 00	0 00
	BURNER diesel	0			0	0	0 00	0 00	0 00	0.00	0.00	0 00	0 00	0 00	0 00	0 00
	AUXILIARYEQUIP<600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	2600	125 58	3013 92	8	208	1 83	8 4 1	63 00	1 89	13 74	1 52	6 9 9	52 41	1 57	11 44
	VESSELS>600hp diesel(supply)	2600	125 58	3013 92	8	156	1 83	8 4 1	63 00	189	13 74	1 14	5 25	39 31	1 18	8 58
	VESSELS>600hp diesel(tugs)	4600	222 18	5332 32	12	2	3 24	14 87	111 45	3 34	24 32	0 04	0 18	1 34	0 04	0 29
PIPELINE	PIPELINE LAY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	SUPPORT VESSEL diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	PIPELINE BURY BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS>600hp diesel(crew)	0	0	0 00	0	0	0 00 0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00 0 00
	VESSELS>600hp diesel(supply)	U	U	0 00	U	U	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
FACILITY	DERRICK BARGE diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
INSTALLATION	MATERIAL TUG diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00 0 00
	VESSELS>600hp diesel(crew) VESSELS>600hp diesel(supply)	0	0	0 00	0	0	0 00 0 00	0 00	0.00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	VESSELS/600rip diesei(supply)	0	0	0 00	U	U	0 00	0 00	0 00	000	0 00	0 00	0 00	0 00	0 00	0 00
PRODUCTION	RECIP <600hp diesel (Crane)	160	7 728	185 47	3	260	0.35	0 52	4 93	0 39	1 07	0 14	0 20	1 92	0 15	0 42
	RECIP >600hp diesel	0	0	0 00	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	SUPPORT VESSEL diesel	2600	125 58	3013 92	6	104	1 83	8 4 1	63 00	1 89	13 74	0 57	2 62	19 65	0 59	4 29
	TURBINE nat gas (generator)	235	2238 14	53715 36	24	365		0 00	0 67	0 01	0 43		0.01	2 95	0 02	1 88
	RECIP 2 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP.4 cycle lean nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP.4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
	RECIP 4 cycle rich nat gas	0	0	0 00	0	0	0.00	0 00	0 00	0 00	0 00	0.00	0 00	0 00	0 00	0 00
	BURNER natigas (heater treater)	0 BPD	0 00 SCF/HR	0 00 COUNT	0	0	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00
	MISC. Tank-	0 0			0	0				0 00		 			0 00	
	FLARE-		0		0	0		0 00	0 00	0 00	0 00		0 00	0.00	0 00	0 00
	PROCESS VENT-		0		0	0		000	000	0 00	""		""	000	0 00	0 00
	FUGITIVES-			1000 0	, and a second	365				0.50					2 19	
	GLYCOL STILL VENT-		0	10000	0	0				0.00					0 00	
DRILLING	OIL BURN	0			0	0	0 0 0	0 00	0 00	0 00	0 00	0 00	0.00	0 00	0.00	0 00
WELL TEST	GAS FLARE		0		0	0		0 00	0 00	0 00	0 00		0 00	0 00	0 00	0 00
2022	YEAR TOTAL						15.30	69.07	519.26	16.31	113.57	30.58	139.88	1051.47	33.76	230.65
EXEMPTION CALCULATION	DISTANCE FROM LAND IN MILES		I	I				l	l	I	1	1631.70	1631.70	1631.70	1631.70	45527.76
	49 0	<u> </u>														
													•			

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Arena Offshore, LP	Eugene Island	237/253/254	OCS-G 00981/	Platform K	K001 thorugh K	013 Wells		Aimee Deady		281-210-3180	#REF!					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMU	/I POUNDS F	PER HOUR			ES	TIMATED TO	NS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR		SCF/D	HR/D	DAYS	PM	SOx	NOx	Voc	co	PM	SOx	NOx	Voc	co
DRILLING	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WFD 250, 300, or	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
, ,	PRIME MOVER>600hp diesel	l o		0.00	0	0	0.00	0.00	0.00	0.00	0.00 0.00	0.00	0.00	0.00	0.00	0.00
	PRIME MOVER>600hp diesel BURNER diesel	0	0	0.00	0	0	0.00 0.00	0.00 0.00	0.00 0.00	0.00	0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
	AUXILIARY EQUIP<600hp diesel	١ ،	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0		0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	lő	١ ٥	0.00	n	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(tugs)	lŏ	ا ة	0.00	ő	ň	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	viceonia alega (taga)	ľ		0.55		·	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PIPELINE LAY BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
INSTALLATION	SUPPORT VESSEL diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PIPELINE BURY BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	SUPPORT VESSEL diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
FACILITY	DERRICK BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
INSTALLATION	MATERIAL TUG diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
PRODUCTION	RECIP.<600hp diesel (Crane)	160	7.728	185.47	3	260	0.35	0.52	4.93	0.39	1.07	0.14	0.20	1.92	0.15	0.42
	RECIP.>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	SUPPORT VESSEL diesel	2600	125.58	3013.92	6	104	1.83	8.41	63.00	1.89	13.74	0.57	2.62	19.65	0.59	4.29
	TURBINE nat gas (generator)	235	2238.14	53715.36	24	365		0.00	0.67	0.01	0.43		0.01	2.95	0.02	1.88
	RECIP.2 cycle lean nat gas	0	0	0.00	0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	RECIP 4 cycle lean nat gas	0	0	0.00	0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	RECIP 4 cycle rich nai gas	0	0	0.00	0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	RECIP 4 cycle rich nat gas	0	0	0.00	0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	RECIP 4 cycle rich nat gas	0	0	0.00 0.00	0	0		0.00 0.00	0.00 0.00	0.00	0.00 0.00		0.00 0.00	0.00 0.00	0.00 0.00	0.00 0.00
	RECIP.4 cycle rich nal gas BURNER nal gas (healer treater)	0	0.00	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	MISC.	BPD	SCF/HR	COUNT	-	•	0.00	0.00	0.00	1 0.00	0.00	0.00	0.00	0.00	0.00	0.00
	TANK-	0	30.7	555.1	0	0				0.00					0.00	
	FLARE-		0		Ö	ŏ		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	PROCESS VENT-		0		0	Ō				0.00					0.00	
	FUGITIVES-			1000.0		365				0.50					2.19	
	GLYCOL STILL VENT-		0		0	0				0.00					0.00	
	OIL BURN	0			0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WELL TEST	GAS FLARE		0		0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
2023	YEAR TOTAL						2.19	8.93	68.60	2.79	15.24	0.71	2.83	24.53	2.96	6.59
EXEMPTION	DISTANCE FROM LAND IN							<u> </u>	I.							
CALCULATION	MILES											1631.70	1631.70	1631.70	1631.70	45527.76
	49.0															

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL			CONTACT		PHONE	REMARKS					
Arena Offshore, LP	Eugene Island	237/253/254	OCS-G 00981/1	Platform K	K001 thorugh K0	013 Wells		Aimee Deady		281-210-3180	#REFI					
OPERATIONS	EQUIPMENT	RATING	MAX. FUEL	ACT. FUEL	RUN	TIME		MAXIMUN	/I POUNDS P	ER HOUR			ES	TIMATED TO	NS	
	Diesel Engines	HP	GAL/HR	GAL/D												
	Nat. Gas Engines	HP	SCF/HR	SCF/D												
	Burners	MMBTU/HR	SCF/HR	SCF/D	HR/D	DAYS	PM	SOx	NOx	VOC	co	PM	SOx	NOx	VOC	CO
	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PRIME MOVER>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	BURNER diesel	0			0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	AUXILIARY EQUIP<600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(tugs)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PIPELINE LAY BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	SUPPORT VESSEL diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	PIPELINE BURY BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	SUPPORT VESSEL diesel	0	0	0.00	0	0	0.00 0.00	0.00	0.00 0.00							
	VESSELS>600hp diesel(crew)	0	0	0.00 0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00 0.00	0.00
	VESSELS>600hp diesel(supply)	U	U	0.00	U	U	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	DERRICK BARGE diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	MATERIAL TUG diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(crew)	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	VESSELS>600hp diesel(supply)	0	0	0.00	0	U	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	RECIP.<600hp diesel (Crane)	160	7.728	185.47	3	260	0.35	0.52	4.93	0.39	1.07	0.14	0.20	1.92	0.15	0.42
	RECIP.>600hp diesel	0	0	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	SUPPORT VESSEL diesel	2600	125.58	3013.92	6	104	1.83	8.41	63.00	1.89	13.74	0.57	2.62	19.65	0.59	4.29
	TURBINE nat gas (generator)	235	2238.14	53715.36	24	365		0.00	0.67	0.01	0.43		0.01	2.95	0.02	1.88
	RECIP.2 cycle lean nat gas	0	0	0.00	0	0										
	RECIP 4 cycle lean nat gas	0	0	0.00	0	0										
	RECIP.4 cycle rich nat gas	0	0	0.00	0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	RECIP.4 cycle rich nat gas	0	0	0.00	0	0		0.00	0.00	0.00 0.00	0.00		0.00 0.00	0.00	0.00	0.00
	RECIP.4 cycle rich nat gas	0	0	0.00 0.00	0	0		0.00 0.00	0.00 0.00	0.00	0.00 0.00		0.00	0.00 0.00	0.00 0.00	0.00 0.00
	RECIP.4 cycle rich nat gas BURNER nat gas (heater treater)	lö	0.00	0.00	0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	MISC.	BPD	SCF/HR	COUNT			0.00	0.00	0.00	0.00	0.00	L 0.00	0.00	0.00	0.00	0.00
	TANK-	0	30171110	300.11	0	0				0.00					0.00	
	FLARE-		0		ő	Ö		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
	PROCESS VENT-		ő		ő	ő				0.00					0.00	
	FUGITIVES-		_	1000.0	-	365				0.50					2.19	
	GLYCOL STILL VENT-		0		0	0				0.00					0.00	
	OIL BURN	0			0	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WELL TEST	GAS FLARE		0		0	0		0.00	0.00	0.00	0.00		0.00	0.00	0.00	0.00
2024	Through 2033 YEAR TOTAL						2.19	8.93	68.60	2.79	15.24	0.71	2.83	24.53	2.96	6.59
EVENDED	DIOTANIOS EDOMI AND IN															
EXEMPTION CALCULATION	DISTANCE FROM LAND IN											1631.70	1631.70	1631.70	1631.70	45507.70
CALCULATION	MILES 49.0	1										1831.70	1031.70	1031.70	1031.70	45527.76
	43.0	<u> </u>										I				

COMPANY	AREA	BLOCK	LEASE	PLATFORM	WELL
Arena Offshore,	Eugene Island	237/253/254	OCS-G 00981/1074	1/3 Platform K	K001 thorugh K013 Wells
Year		Emitted		Substance	
	PM	SOx	NOx	voc	со
2020	27.97	127.91	961.78	31.07	211.08
2021	30.58	139.88	1051.47	33.76	230.65
2022	30.58	139.88	1051.47	33.76	230.65
2023	0.71	2.83	24.53	2.96	6.59
2024	0.71	2.83	24.53	2.96	6.59
2025	0.71	2.83	24.53	2.96	6.59
2026	0.71	2.83	24.53	2.96	6.59
2027	0.71	2.83	24.53	2.96	6.59
2028	0.71	2.83	24.53	2.96	6.59
2029	0.71	2.83	24.53	2.96	6.59
2030	0.71	2.83	24.53	2.96	6.59
2031	0.71	2.83	24.53	2.96	6.59
2032	0.71	2.83	24.53	2.96	6.59
2033	0.71	2.83	24.53	2.96	6.59
Allowable	1631.70	1631.70	1631.70	1631.70	45527.76

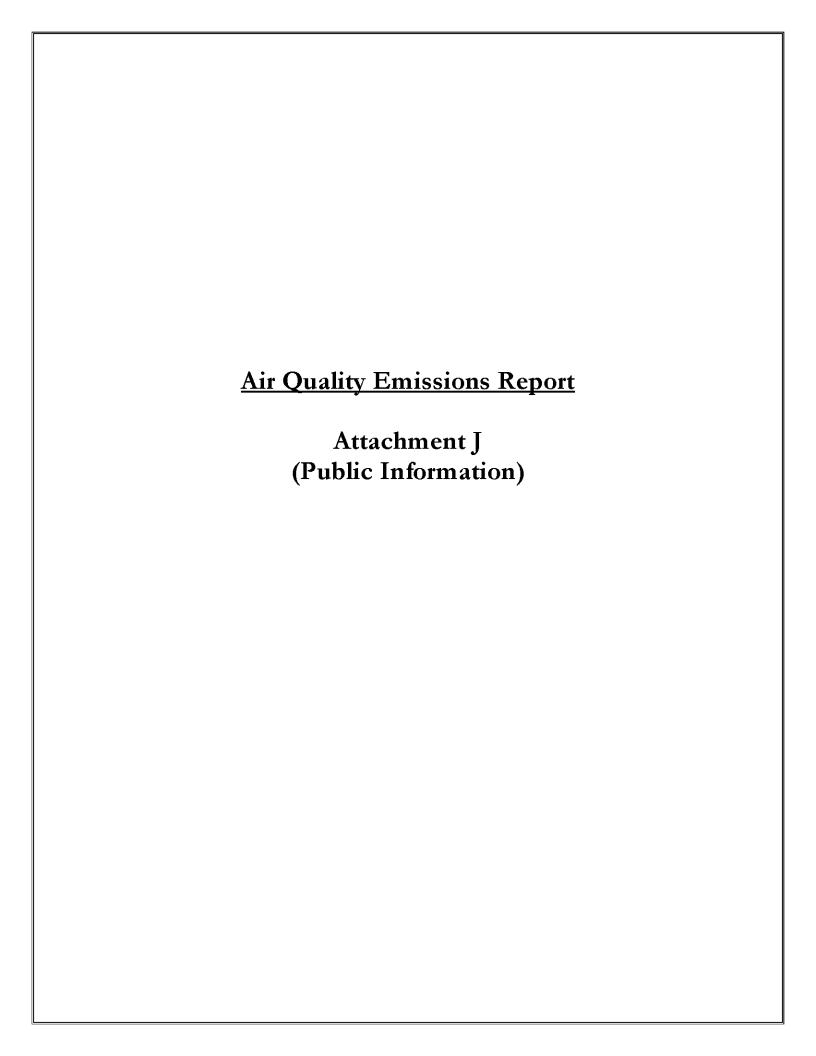

SPILL RESPONSE DISCUSSION

For the purpose of NEPA and Coastal Zone Management Act analysis, the largest spill volume originating from the proposed activity would be a well blowout during drilling operations, estimated to be 20,699 barrels of crude oil with an API gravity of 34°.

Land Segment and Resource Identification

Trajectories of a spill and the probability of it impacting a land segment have been projected utilizing information in the BOEM Oil Spill Risk Analysis Model (OSRAM) for the Central and Western Gulf of Mexico available on the BOEM website. The results are shown in **Figure 1.** The BOEM OSRAM identifies a 16% probability of impact to the shorelines of Cameron Parish, Louisiana within 30 days. Cameron Parish includes the east side of Sabine Lake, Sabine National Wildlife Refuge, Calcasieu Lake, Lacassine National Wildlife Refuge (inland) and Grand Lake. Cameron Parish also includes the area along the coastline from Sabine Pass to Big Constance Lake in Rockefeller Wildlife Refuge. This region is composed of open public beaches, marshlands and swamps. It serves as a habitat for numerous birds, finfish and other animals, including several rare, threatened and endangered species.

Response

Arena Offshore, LP will make every effort to respond to the Worst Case Discharge as effectively as practicable. A description of the response equipment under contract to contain and recover the Worst Case Discharge is shown in **Figure 2.**

Using the estimated chemical and physical characteristics of crude oil, an ADIOS weathering model was run on a similar product from the ADIOS oil database. The results indicate 30% or approximately 6,210 barrels of crude oil would be evaporated/dispersed within 24 hours, with approximately 14,489 barrels remaining.

Spill Response EI 237, K Platform	Barrels of Oil
WCD Volume	20,699
Less 30% natural evaporation/dispersion	6,210
Remaining volume	14,489

Figure 2 outlines equipment, personnel, materials and support vessels as well as temporary storage equipment available to respond to the worst case discharge. The volume accounts for the amount remaining after evaporation/dispersion at 24 hours. The list estimates individual times needed for procurement, load out, travel time to the site and deployment. **Figure 2** also indicates how operations will be supported.

Arena Offshore, LP's Oil Spill Response Plan includes alternative response technologies such as dispersants and in-situ burn. Strategies will be decided by Unified Command based on an operations safety analysis, the size of the spill, weather and potential impacts. If aerial

dispersants are utilized, 8 sorties (9,600 gallons) from two of the DC-3 aircrafts and 4 sorties (8,000 gallons) from the Basler aircraft would provide a daily dispersant capability of 7,540 barrels. If the conditions are favorable for in-situ burning, the proper approvals have been obtained and the proper planning is in place, in-situ burning of oil may be attempted. Slick containment boom would be immediately called out and on-scene as soon as possible. Offshore response strategies may include attempting to skim utilizing CGA spill response equipment, with a total derated skimming capacity of 122,055 barrels. Temporary storage associated with skimming equipment equals 4,498 barrels. If additional storage is needed, various storage barges with a total capacity 130,000 bbls may be mobilized and centrally located to provide temporary storage and minimize off-loading time. Safety is first priority. Air monitoring will be accomplished and operations deemed safe prior to any containment/skimming attempts.

If the spill went unabated, shoreline impact in Cameron Parish, Louisiana would depend upon existing environmental conditions. Shoreline protection would include the use of CGA's near shore and shallow water skimmers with a totaled derated skimming capacity of 26,130 barrels. Temporary storage associated with skimming equipment equals 321 barrels. If additional storage is needed, various storage barges with a total capacity 46,000 bbls may be mobilized and centrally located to provide temporary storage and minimize off-loading time. Onshore response may include the deployment of shoreline boom on beach areas, or protection and sorbent boom on vegetated areas. A Master Service Agreement with AMPOL will ensure access to 34,050 feet of 18" shoreline protection boom. Figure 2 outlines individual times needed for procurement, load out, travel time to the site and deployment. Strategies would be based upon surveillance and real time trajectories that depict areas of potential impact given actual sea and weather conditions. Applicable Area Contingency Plans (ACPs), Geographic Response Plans (GRPs), and Unified Command (UC) will be consulted to ensure that environmental and special economic resources are correctly identified and prioritized to ensure optimal protection. Shoreline protection strategies depict the protection response modes applicable for oil spill cleanup operations. As a secondary resource, the State of Louisiana Initial Oil Spill Response Plan will be consulted as appropriate to provide detailed shoreline protection strategies and describe necessary action to keep the oil spill from entering Louisiana's coastal wetlands. The UC should take into consideration all appropriate items detailed in Tactics discussion of this Appendix. The UC and their personnel have the option to modify the deployment and operation of equipment to allow for a more effective response to site-specific circumstances. Arena Offshore, LP's contract Spill Management Team has access to the applicable ACP(s) and GRP(s).

Based on the anticipated worst case discharge scenario, Arena Offshore, LP can be onsite with contracted oil spill recovery equipment with adequate response capacity to contain and recover surface hydrocarbons, and prevent land impact, to the maximum extent practicable, within an estimated 60 hours (based on the equipment's Effective Daily Recovery Capacity (EDRC)).

Initial Response Considerations

Actual actions taken during an oil spill response will be based on many factors to include but not be limited to:

- Weather
- Equipment and materials availability
- Ocean currents and tides
- Location of the spill
- Product spilled
- Amount spilled
- Environmental risk assessments
- Trajectory and product analysis
- Well status, i.e., shut in or continual release

Arena Offshore, LP will take action to provide a safe, aggressive response to contain and recover as much of the spilled oil as quickly as it is safe to do so. In an effort to protect the environment, response actions will be designed to provide an "in-depth" protection strategy meant to recover as much oil as possible as far from environmentally sensitive areas as possible. Safety will take precedence over all other considerations during these operations.

Coordination of response assets will be supervised by the designation of a SIMOPS group as necessary for close quarter vessel response activities. Most often, this group will be used during source control events that require a significant number of large vessels operating independently, but in coordination to complete a common objective, in a small area and in close coordination and support of each other. This group must also monitor the subsurface activities of each vessel (ROV, dispersant application, well control support, etc.). The SIMOPS group leader reports to the Source Control Section Chief.

In addition, these activities will be monitored by the spill management team (SMT) and Unified Command via a structured Common Operating Picture (COP) established to track resource and slick movement in real time.

Upon notification of a spill, the following actions will be taken:

- Information will be confirmed
- An assessment will be made and initial objectives set
- OSROs and appropriate agencies will be notified
- ICS 201, Initial Report Form completed
- Initial Safety plan will be written and published
- Unified Command will be established
 - Overall safety plan developed to reflect the operational situation and coordinated objectives
 - Areas of responsibility established for Source Control and each surface operational site
 - On-site command and control established

Offshore Response Actions

Equipment Deployment

Surveillance

- Surveillance Aircraft: within two hours of QI notification, or at first light
- Provide trained observer to provide on site status reports
- Provide command and control platform at the site if needed
- Continual surveillance of oil movement by remote sensing systems, aerial photography and visual confirmation
- Continual monitoring of vessel assets using vessel monitoring systems

Dispersant application assets

- Put ASI on standby
- With the FOSC, conduct analysis to determine appropriateness of dispersant application (refer to Section 18)
- Gain FOSC approval for use of dispersants on the surface
- Deploy aircraft in accordance with a plan developed for the actual situation
- Coordinate movement of dispersants, aircraft, and support equipment and personnel
- Confirm dispersant availability for current and long range operations
- Start ordering dispersant stocks required for expected operations

Containment boom

- Call out early and expedite deployment to be on scene ASAP
- Ensure boom handling and mooring equipment is deployed with boom
- Provide continuing reports to vessels to expedite their arrival at sites that will provide for their most effective containment
- Use Vessels of Opportunity (VOO) to deploy and maintain boom

Oceangoing Boom Barge

- Containment at the source
- Increased/enhanced skimmer encounter rate
- Protection booming

In-situ Burn assets

- Determine appropriateness of in-situ burn operation in coordination with the FOSC and affected SOSC
- Determine availability of fire boom and selected ignition systems
- Start ordering fire boom stocks required for expected operations
- Contact boom manufacturer to provide training & tech support for operations, if required
- Determine assets to perform on water operation
- Build operations into safety plan
- Conduct operations in accordance with an approved plan
- Initial test burn to ensure effectiveness

Dedicated off-shore skimming systems

General

- Deployed to the highest concentration of oil
- Assets deployed at safe distance from aerial dispersant and in-situ burn operations

CGA HOSS Barge

- Use in areas with heaviest oil concentrations
- Consider for use in areas of known debris (seaweed, and other floating materials)

CGA 95' Fast Response Vessels (FRVs)

- Designed to be a first vessel on scene
- Capable of maintaining the initial Command and Control function for on water recovery operations
- 24 hour oil spill detection capability
- Highly mobile and efficient skimming capability
- Use as far off-shore as safely possible

CGA FRUs

- To the area of the thickest oil
- Use as far off-shore as allowed
- VOOs 140' 180' in length
- VOOs with minimum of 18' x 38' or 23' x 50' of optimum deck space
- VOOs in shallow water should have a draft of <10 feet when fully loaded

T&T Koseq Skimming Systems

- To the area of the thickest oil
- Use as far off-shore as allowed
- VOOs with a minimum of 2,000 bbls storage capacity
- VOOs at least 200' in length
- VOOs with deck space of 100' x 40' to provide space for arms, tanks, and crane
- VOOs for shallow water should be deck barges with a draft of <10 feet when fully loaded

Storage Vessels

- Establish availability of CGA contracted assets (See Appendix E)
- Early call out (to allow for tug boat acquisition and deployment speeds)
- Phase mobilization to allow storage vessels to arrive at the same time as skimming systems
- Position as closely as possible to skimming assets to minimize offloading time

Vessels of Opportunity (VOO)

- Use Arena Offshore, LP's contracted resources as applicable
- Industry vessels are ideal for deployment of Vessel of Opportunity Skimming Systems (VOSS)
- Acquire additional resources as needed
- Consider use of local assets, i.e. fishing and pleasure craft for ISB operations or boom tending
- Expect mission specific and safety training to be required
- Plan with the US Coast Guard for vessel inspections
- Place VOOs in Division or Groups as needed
- Use organic on-board storage if appropriate
- Maximize non-organic storage appropriate to vessel limitations
- Decant as appropriate after approval to do so has been granted
- Assign bulk storage barges to each Division/Group
- Position bulk storage barges as close to skimming units as possible
- Utilize large skimming vessel (e.g. barges) storage for smaller vessel offloading
- Maximize skimming area (swath) to the optimum width given sea conditions and available equipment
- Maximize use of oleophilic skimmers in all operations, but especially offshore
- Nearshore, use shallow water barges and shuttle to skimming units to minimize offloading time
- Plan and equip to use all offloading capabilities of the storage vessel to minimize offloading time

Adverse Weather Operations:

In adverse weather, when seas are ≥ 3 feet, the use of larger recovery and storage vessels, oleophilic skimmers, and large offshore boom will be maximized. KOSEQ Arm systems are built for rough conditions, and they should be used until their operational limit (9.8' seas) is met. Safety will be the overriding factor in all operations and will cease at the order of the Unified Command, vessel captain, or in an emergency, "stop work" may be directed by any crew member.

Surface Oil Recovery Considerations and Tactics (Offshore and Near-shore Operations)

Maximization of skimmer-oil encounter rate

- Place barges in skimming task forces, groups, etc., to reduce recovered oil offloading time
- Place barges alongside skimming systems for immediate offloading of recovered oil when practicable
- Use two vessels, each with heavy sea boom, in an open-ended "V" configuration to funnel surface oil into a trailing skimming unit's organic, V-shaped boom and skimmer (see page 7, CGA Equipment Guide Book and Tactic Manual (CGATM)

- Use secondary vessels and heavy sea boom to widen boom swath beyond normal skimming system limits (see page 15, CGATM)
- Consider night-time operations, first considering safety issues
- Utilize all available advanced technology systems (IR, X-Band Radar, etc.) to determine the location of, and move to, recoverable oil
- Confirm the presence of recoverable oil prior to moving to a new location

Maximize skimmer system efficiency

- Place weir skimming systems in areas of calm seas and thick oil
- Maximize the use of oleophilic skimming systems in heavier seas
- Place less mobile, high EDRC skimming systems (e.g. HOSS Barge) in the largest pockets of the heaviest oil
- Maximize onboard recovered oil storage for vessels.
- Obtain authorization for decanting of recovered water as soon as possible
- Use smaller, more agile skimming systems to recover streamers of oil normally found farther from the source. Place recovered oil barges nearby

Recovered Oil Storage

- Smaller barges in larger quantities will increase flexibility for multi-location skimming operations
- Place barges in skimming task forces, groups, etc., to reduce recovered oil offloading time
- Procure and deploy the maximum number of portable tanks to support Vessel of Opportunity Skimming Systems if onboard storage is not available
- Maximize use of the organic recovered oil storage capacity of the skimming vessel

Command, Control, and Communications (C³)

- Publish, implement, and fully test an appropriate communications plan
- Design an operational scheme, maintaining a manageable span of control
- Designate and mark C³ vessels for easy aerial identification
- Designate and employ C³ aircraft for task forces, groups, etc.
- Use reconnaissance air craft and Rapid Response Teams (RAT) to confirm the presence of recoverable oil

On Water Recovery Group

When the first skimming vessel arrives on scene, a complete site assessment will be conducted before recovery operations begin. Once it is confirmed that the air monitoring readings for O2, LEL, H2S, CO, VOC, and Benzene are all within the permissible limits, oil recovery operations may begin.

As skimming vessels arrive, they will be organized to work in areas that allow for the most efficient vessel operation and free vessel movement in the recovery of oil. Vessel groups will vary in structure as determined by the Operations Section of the Unified Command, but will generally consist, at a minimum, of the following dedicated assets:

- 3 to 5 Offshore skimming vessels (recovery)
- 1 Tank barge (temporary storage)
- 1 Air asset (tactical direction)
- 2 Support vessels (crew/utility for supply)
- 6 to 10 Boom vessels (enhanced booming)

Example (Note: Actual organization of TFs will be dependent on several factors including, asset availability, weather, spilled oil migration, currents, etc.)

The 95' FRV Breton Island out of Venice arrives on scene and conducts an initial site assessment. Air monitoring levels are acceptable and no other visual threats have been observed. The area is cleared for safe skimming operations. The Breton Island assumes command and control (CoC) of on-water recovery operations until a dedicated non-skimming vessel arrives to relieve it of those duties.

A second 95' FRV arrives and begins recovery operations alongside the Breton Island. Several more vessels begin to arrive, including a third 95' FRV out of Galveston, the HOSS Barge (High Volume Open Sea Skimming System) out of Harvey, a boom barge (CGA 300) with 25,000' of 42" auto boom out of Leeville, and 9 Fast Response Units (FRUs) from the load-out location at C-Port in Port Fourchon.

As these vessels set up and begin skimming, they are grouped into task forces (TFs) as directed by the Operations Section of the Unified Command located at the command post.

Initial set-up and potential actions:

- A 1,000 meter safety zone has been established around the incident location for vessels involved in Source Control
- The HOSS Barge is positioned facing the incident location just outside of this safety zone or at the point where the freshest oil is reaching the surface
- The HOSS Barge engages its Oil Spill Detection (OSD) system to locate the heaviest oil and maintains that ability for 24-hour operations

- The HOSS Barge deploys 1,320' of 67" Sea Sentry boom on each side, creating a swath width of 800'
- The Breton Island and H.I. Rich skim nearby, utilizing the same OSD systems as the HOSS Barge to locate and recover oil
- Two FRUs join this group and it becomes TF1
- The remaining 7 FRUs are split into a 2 and 3 vessel task force numbered TF2 and TF3
- A 95' FRV is placed in each TF
- The boom barge (CGA 300) is positioned nearby and begins deploying auto boom in sections between two utility vessels (1,000' to 3,000' of boom, depending on conditions) with chain-link gates in the middle to funnel oil to the skimmers
- The initial boom support vessels position in front of TF2 and TF3
- A 100,000+ barrel offshore tank barge is placed with each task force as necessary to facilitate the immediate offload of skimming vessels

The initial task forces (36 hours in) may be structured as follows:

TF 1

- 1 95' FRV
- 1 HOSS Barge with 3 tugs
- 2 FRUs
- 1-100,000+ barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 8-500' sections of auto boom with gates
- 8 Boom-towing vessels
- 2 Support vessels (crew/utility)

TF 2

- 1 − 95' FRV
- 4 FRUs
- 1 100,000 +barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 10 500' sections of auto boom with gates
- 10 Boom-towing vessels
- 2 Support vessels (crew/utility)

TF 3

- 1 − 95' FRV
- 3 FRUs
- 1-100,000+ barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 8-500' sections of auto boom with gates
- 8 Boom-towing vessels
- 2 Support vessels (crew/utility)

Offshore skimming equipment continues to arrive in accordance with the ETA data listed in figure H.3a; this equipment includes 2 AquaGuard skimmers and 11 sets of Koseq Rigid Skimming Arms. These high volume heavy weather capable systems will be divided into functional groups and assigned to specific areas by the Operations Section of the Unified Command.

At this point of the response, the additional TFs may assume the following configurations:

TF 4

- 2 Sets of Koseq Rigid Skimming Arms w/ associated 200'+ PIDVs
- 1 AquaGuard Skimmer
- 1 100,000+ barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 2 Support vessels (crew/utility)
- 6-500' sections of auto boom with gates
- 6 Boom-towing vessels

TF 5

- 3 Sets of Koseq Rigid Skimming Arms w/ associated 200'+ PIDVs
- 1 AquaGuard Skimmer
- 1-100,000+ barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 2 Support vessels (crew/utility)
- 8-500' sections of auto boom with gates
- 8 Boom-towing vessels

TF 6

- 3 Sets of Koseq Rigid Skimming Arms w/ associated 200'+ PIDVs
- 1 100,000 +barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 2 Support vessels (crew/utility)
- 6-500' sections of auto boom with gates
- 6 Boom-towing vessels

TF 7

- 3 Sets of Koseq Rigid Skimming Arms w/ associated 200'+ PIDVs
- 1-100,000+ barrel tank barge and associated tug(s)
- 1 Dedicated air asset for tactical direction
- 2 Support vessels (crew/utility)
- 6-500' sections of auto boom with gates
- 6 Boom-towing vessels

CGA Minimum Acceptable Capabilities for Vessels of Opportunity (VOO)

Minimum acceptable capabilities of Petroleum Industry Designed Vessels (PIDV) for conducting Vessel of Opportunity (VOO) skimming operations are shown in the table below. PIDVs are "purpose-built" to provide normal support to offshore oil and gas operators. They include but are not limited to utility boats, offshore supply vessels, etc. They become VOOs when tasked with oil spill response duties.

Capability	FRU	KOSEQ	AquaGuard
Type of Vessel	Utility Boat	Offshore Supply Vessel	Utility Boat
Operating parameters			
Sea State	3-5 ft max	9.8 ft max	3-5 ft max
Skimming speed	≤1 kt	≤3 kts	≤1 kt
Vessel size			
Minimum Length	100 ft	200 ft	100 ft
Deck space for:	18x32 ft	100x40 ft	18x32 ft
Communication Assets	Marine Band Radio	Marine Band Radio	Marine Band Radio

Tactical use of Vessels of Opportunity (VOO): Arena Offshore, LP will take all possible measures to maximize the oil-to-skimmer encounter rate of all skimming systems, to include VOOs, as discussed in this section. VOOs will normally be placed within an On-water recovery unit as shown in figures below.

Skimming Operations: PIDVs are the preferred VOO skimming platform. OSROs are more versed in operating on these platforms and the vessels are generally large enough with crews more likely versed in spill response operations. They also have a greater possibility of having on-board storage capacity and the most likely vessels to be under contract, and therefore more readily available to the operator. These vessels would normally be assigned to an on-water recovery group/division (see figure below) and outfitted with a VOSS suited for their size and capabilities. Specific tactics used for skimming operations would be dependent upon many parameters which include, but are not limited to, safety concerns, weather, type VOSS on board, product being recovered, and area of oil coverage. Planners would deploy these assets with the objective of safely maximizing oil- to-skimmer encounter rate by taking actions to minimize non-skimming time and maximizing boom swath. Specific tactical configurations are shown in figures below.

The Fast Response Unit (FRU): A self-contained, skid based, skimming system that is deployed from the right side of a vessel of opportunity (VOO). An outrigger holds a 75' long section of air inflatable boom in place that directs oil to an apex for recovery via a Foilex 250 weir skimmer. The outrigger creates roughly a 40' swath width dependent on the VOO beam. The lip of the collection bowl on the skimmer is placed as close to the oil and water interface as possible to maximize oil recovery and minimize water retention. The skimmer then pumps all fluids recovered to the storage tank where it is allowed to settle, and with the approval of the Coast Guard, the water is decanted from the bottom of the tank back into the water ahead of the containment boom to be recycled through the system. Once the tank is full of as much pure recovered oil as possible it is offloaded to a storage barge for disposal in accordance with an approved disposal plan. A second 100 barrel storage tank can be added if the appropriate amount of deck space is available to use as secondary storage.

Tactical Overview

Mechanical Recovery – The FRU is designed to provide fast response skimming capability in the offshore and nearshore environment in a stationary or advancing mode. It provides a rated daily recovery capacity of 4,100 barrels. An additional boom reel with 440' of offshore boom can be deployed along with the FRU, and a second support vessel for boom towing, to extend the swath width when attached to the end of the fixed boom. The range and sustainability offshore is dependent on the VOO that the unit is placed on, but generally these can stay offshore for extended periods. The FRU works well independently or assigned with other on-water recovery assets in a task force. In either case, it is most effective when a designated aircraft is assigned to provide tactical direction to ensure the best placement in recoverable oil.

Maximum Sea Conditions — Under most circumstances the FRU can maintain standard oil spill recovery operations in 2' to 4' seas. Ultimately, the Coast Guard licensed Captain in charge of the VOO (with input from the CGAS Supervisor assigned) will be responsible to determine when the sea conditions have surpassed the vessel's safe operating capabilities.

Possible Task Force Configuration (Multiple VOOs can be deployed in a task force)

- 1 VOO (100' to 165' Utility or Supply Vessel)
- 1 Boom reel w/support vessel for towing
- 1 Tank barge (offshore) for temporary storage
- 1 Utility/Crewboat (supply)
- 1 Designated spotter aircraft



The VOSS (yellow) is being deployed and connected to an out-rigged arm. This is suitable for collection in both large pockets of oil and for recovery of streaming oil. The oil-to-skimmer encounter rate is limited by the length of the arm. Skimming pace is ≤ 1 knot.



Through the use of an additional VOO, and using extended sea boom, the swath of the VOSS is increased therefore maximizing the oil-to-skimmer encounter rate. Skimming pace is ≤ 1 knot.

The Koseq Rigid Sweeping Arm: A skimming system deployed on a vessel of opportunity. It requires a large Offshore or Platform Supply Vessel (OSV/PSV), greater than 200' with at least 100' x 50' of free deck space. On each side of the vessel, a 50' long rigid framed Arm is deployed that consists of pontoon chambers to provide buoyancy, a smooth nylon face, and a hydraulically adjustable mounted weir skimmer. The Arm floats independently of the vessel and is attached by a tow bridle and a lead line. The movement of the vessel forward draws the rubber end seal of the arm against the hull to create a collection point for free oil directed to the weir by the Arm face. The collection weir is adjusted to keep the lip as close to the oil water interface as possible to maximize oil recovery while attempting to minimize excess water collection. A transfer pump (combination of positive displacement, screw type and centrifuge suited for highly viscous oils) pump the recovered liquid to portable tanks and/or dedicated fixed storage tanks onboard the vessel. After being allowed to sit and separate, with approval from the Coast Guard, the water can be decanted (pumped off) in front of the collection arm to be reprocessed through the system. Once full with as much pure recovered oil as possible, the oil is transferred to a temporary storage barge where it can be disposed of in accordance with an approved disposal plan.

Tactical Overview


Mechanical Recovery – Deployed on large vessels of opportunity (VOO) the Koseq Rigid Sweeping Arms are high volume surge capacity deployed to increase recovery capacity at the source of a large oil spill in the offshore and outer nearshore environment of the Gulf of Mexico. They are highly mobile and sustainable in rougher sea conditions than normal skimming vessels (9.8' seas). The large Offshore Supply Vessels (OSV) required to deploy the Arms are able to remain on scene for extended periods, even when sea conditions pick up. Temporary storage on deck in portable tanks usually provides between 1,000 and 3,000 bbls. In most cases, the OSV will be able to pump 20% of its deadweight into the liquid mud tanks in accordance with the vessels Certificate of Inspection (COI). All storage can be offloaded utilizing the vessels liquid transfer system.

Maximum Sea Conditions - Under most circumstances the larger OSVs are capable of remaining on scene well past the Skimming Arms maximum sea state of 9.8'. Ultimately it will be the decision of the VOO Captain, with input from the T&T Supervisor onboard, to determine when the sea conditions have exceeded the safe operating conditions of the vessel.

Command and Control – The large OSVs in many cases have state of the art communication and electronic systems, as well as the accommodations to support the function of directing all skimming operations offshore and reporting back to the command post.

Possible Task Force Configuration (Multiple Koseq VOOs can be deployed in a task force)

- $1 \ge 200$ ' Offshore Supply Vessels (OSV) with set of Koseq Arms
- 2 to 4 portable storage tanks (500 bbl)
- 1 Modular Crane Pedestal System set (MCPS) or 30 cherry picker (crane) for deployment
- 1 Tank barge (offshore) for temporary storage
- 1 Utility/Crewboat (supply)
- 1 Designated spotter aircraft
- 4 Personnel (4 T&T OSRO)

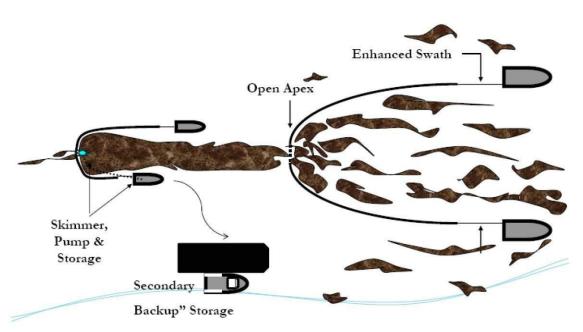

Scattered oil is "caught" by two VOO and collected at the apex of the towed sea boom. The oil moves thought a "gate" at that apex, forming a larger stream of oil which moves into the boom of the skimming vessel. Operations are paced at >1. A recovered oil barge stationed nearby to minimize time taken to offload recovered oil.





This is a depiction of the same operation as above but using KOSEQ Arms. In this configuration, the collecting boom speed dictates the operational pace at ≥ 1 knot to minimize entrainment of the oil.

Clean Gulf Associates (CGA) Procedure for Accessing Member-Contracted and other Vessels of Opportunity (VOOs) for Spill Response

- CGA has procedures in place for CGA member companies to acquire vessels of opportunity (VOOs) from an existing CGA member's contracted fleet or other sources for the deployment of CGA portable skimming equipment including Koseq Arms, Fast Response Units (FRUs) and any other portable skimming system(s) deemed appropriate for the response for a potential or actual oil spill, WCD oil spill or a Spill of National Significance (SONS).
- CGA uses Port Vision, a web-based vessel and terminal interface that empowers CGA to track vessels through Automatic Identification System (AIS) and terminal activities using a Geographic Information System (GIS). It provides live AIS/GIS views of waterways showing current vessel positions, terminals, created vessel fleets, and points-of-interest. Through this system, CGA has the ability to get instant snapshots of the location and status of all vessels contracted to CGA members, day or night, from any web-enabled PC.

Near Shore Response Actions

Timing

- Put near shore assets on standby and deployment in accordance with planning based on the actual situation, actual trajectories and oil budgets
- VOO identification and training in advance of spill nearing shoreline if possible
- Outfitting of VOOs for specific missions
- Deployment of assets based on actual movement of oil

Considerations

- Water depth, vessel draft
- Shoreline gradient
- State of the oil
- Use of VOOs
- Distance of surf zone from shoreline

Surveillance

- Provide trained observer to direct skimming operations
- Continual surveillance of oil movement by remote sensing systems, aerial photography and visual confirmation
- Continual monitoring of vessel assets

Dispersant Use

- Generally will not be approved within 3 miles of shore or with less than 10 meters of water depth
- Approval would be at Regional Response Team level (Region 6)

Dedicated Near Shore skimming systems

- FRVs
- Egmopol and Marco SWS
- Operate with aerial spotter directing systems to observed oil slicks

VOO

- Use Arena Offshore, LP's contracted resources as applicable
- Industry vessel are usually best for deployment of Vessel of Opportunity Skimming Systems (VOSS)
- Acquire additional resources as needed
- Consider use of local assets, i.e. fishing and pleasure craft
- Expect mission specific and safety training to be required
- Plan with the US Coast Guard for vessel inspections
- Operate with aerial spotter directing systems to oil patches

Shoreline Protection Operations

Response Planning Considerations

- Review appropriate Area Contingency Plan(s)
- Locate and review appropriate Geographic Response and Site Specific Plans
- Refer to appropriate Environmentally Sensitive Area Maps
- Capability for continual analysis of trajectories run periodically during the response
- Environmental risk assessments (ERA) to determine priorities for area protection
- Time to acquire personnel and equipment and their availability
- Refer to the State of Louisiana Initial Oil Spill Response Plan, Deep Water Horizon, dated 2 May 2010, as a secondary reference
- Aerial surveillance of oil movement
- Pre-impact beach cleaning and debris removal
- Shoreline Cleanup Assessment Team (SCAT) operations and reporting procedures
- Boom type, size and length requirements and availability
- Possibility of need for In-situ burning in near shore areas
- Current wildlife situation, especially status of migratory birds and endangered species in the area
- Check for Archeological sites and arrange assistance for the appropriate state agency when planning operations the may impact these areas

Placement of boom

- Position boom in accordance with the information gained from references listed above and based on the actual situation
- Determine areas of natural collection and develop booming strategies to move oil into those areas
- Assess timing of boom placement based on the most current trajectory analysis and the
 availability of each type of boom needed. Determine an overall booming priority and
 conduct booming operations accordingly. Consider:
 - Trajectories
 - Weather forecast
 - Oil Impact forecast
 - Verified spill movement
 - o Boom, manpower and vessel (shallow draft) availability
 - Near shore boom and support material, (stakes, anchors, line)

Beach Preparation - Considerations and Actions

- Use of a 10 mile go/no go line to determine timing of beach cleaning
- SCAT reports and recommendations
- Determination of archeological sites and gaining authority to enter
- Monitoring of tide tables and weather to determine extent of high tides
- Pre cleaning of beaches by moving waste above high tide lines to minimize waste

- Determination of logistical requirements and arranging of waste removal and disposal
- Staging of equipment and housing of response personnel as close to the job site as possible to maximize on-site work time
- Boom tending, repair, replacement and security (use of local assets may be advantageous)
- Constant awareness of weather and oil movement for resource re-deployment as necessary
- Earthen berms and shoreline protection boom may be considered to protect sensitive inland areas
- Requisitioning of earth moving equipment
- Plan for efficient and safe use pf personnel, ensuring:
 - o A continual supply of the proper Personal Protective Equipment
 - Heating or cooling areas when needed
 - Medical coverage
 - o Command and control systems (i.e. communications)
 - Personnel accountability measures
- Remediation requirements, i.e., replacement of sands, rip rap, etc.
- Availability of surface washing agents and associated protocol requirements for their use (see National Contingency Plan Product Schedule for list of possible agents)
- Discussions with all stakeholders, i.e., land owners, refuge/park managers, and others as appropriate, covering the following:
 - Access to areas
 - Possible response measures and impact of property and ongoing operations
 - Determination of any specific safety concerns
 - Any special requirements or prohibitions
 - Area security requirements
 - Handling of waste
 - Remediation expectations
 - Vehicle traffic control
 - Domestic animal safety concerns
 - Wildlife or exotic game concerns/issues

Inland and Coastal Marsh Protection and Response Considerations and Actions

- All considered response methods will be weighed against the possible damage they may
 do to the marsh. Methods will be approved by the Unified Command only after
 discussions with local Stakeholder, as identified above.
 - o In-situ burn may be considered when marshes have been impacted
- Passive clean up of marshes should considered and appropriate stocks of sorbent boom and/or sweep obtained.
- Response personnel must be briefed on methods to traverse the marsh, i.e.,
 - o use of appropriate vessel
 - o use of temporary walkways or road ways
- Discuss and gain approval prior cutting or moving vessels through vegetation
- Discuss use of vessels that may disturb wildlife, i.e, airboats

- Safe movement of vessels through narrow cuts and blind curves
- Consider the possibility that no response in a marsh may be best
- In the deployment of any response asset, actions will be taken to ensure the safest, most efficient operations possible. This includes, but is not limited to:
 - Placement of recovered oil or waste storage as near to vessels or beach cleanup crews as possible.
 - o Planning for stockage of high use items for expeditious replacement
 - o Housing of personnel as close to the work site as possible to minimize travel time
 - Use of shallow water craft
 - Use of communication systems appropriate ensure command and control of assets
 - o Use of appropriate boom in areas that I can offer effective protection
 - o Planning of waste collection and removal to maximize cleanup efficiency
- Consideration or on-site remediation of contaminated soils to minimize replacement operations and impact on the area

Decanting Strategy

Recovered oil and water mixtures will typically separate into distinct phases when left in a quiescent state. When separation occurs, the relatively clean water phase can be siphoned or decanted back to the recovery point with minimal, if any, impact. Decanting therefore increases the effective on-site oil storage capacity and equipment operating time. FOSC/SOSC approval will be requested prior to decanting operations. This practice is routinely used for oil spill recovery.

CGA Equipment Limitations

The capability for any spill response equipment, whether a dedicated or portable system, to operate in differing weather conditions will be directly in relation to the capabilities of the vessel the system in placed on. Most importantly, however, the decision to operate will be based on the judgment of the Unified Command and/or the Captain of the vessel, who will ultimately have the final say in terminating operations. Skimming equipment listed below may have operational limits which exceed those safety thresholds. As was seen in the Deepwater Horizon (DWH) oil spill response, vessel skimming operations ceased when seas reached 5-6 feet and vessels were often recalled to port when those conditions were exceeded. Systems below are some of the most up-to-date systems available and were employed during the DWH spill.

Boom	3 foot seas, 20 knot winds
Dispersants	Winds more than 25 knots
-	Visibility less than 3 nautical miles
	Ceiling less than 1,000 feet.
FRU	8 foot seas
HOSS Barge/OSRB	8 foot seas
Koseq Arms	8 foot seas
OSRV	4 foot seas

Environmental Conditions in the GOM

Louisiana is situated between the easterly and westerly wind belts, and therefore, experiences westerly winds during the winter and easterly winds in the summer. Average wind speed is generally 14-15 mph along the coast. Wave heights average 4 and 5 feet. However, during hurricane season, Louisiana has recorded wave heights ranging from 40 to 50 feet high and winds reaching speeds of 100 mph. Because much of southern Louisiana lies below sea level, flooding is prominent.

Surface water temperature ranges between 70 and 80 °F during the summer months. During the winter, the average temperature will range from 50 and 60 °F.

The Atlantic and Gulf of Mexico hurricane season is officially from 1 June to 30 November. 97% of all tropical activity occurs within this window. The Atlantic basin shows a very peaked season from August through October, with 78% of the tropical storm days, 87% of the minor (Saffir-Simpson Scale categories 1 and 2) hurricane days, and 96% of the major (Saffir-Simpson categories 3, 4 and 5) hurricane days occurring then. Maximum activity is in early to mid September. Once in a few years there may be a hurricane occurring "out of season" - primarily in May or December. Globally, September is the most active month and May is the least active month.

FIGURE 1 TRAJECTORY BY LAND SEGMENT

Trajectory of a spill and the probability of it impacting a land segment have been projected utilizing Arena Offshore, LP's WCD and information in the BOEM Oil Spill Risk Analysis Model (OSRAM) for the Central and Western Gulf of Mexico available on the BOEM website using 30 day impact. The results are tabulated below.

Area/Block	OCS-G	Launch Area	Land Segment and/or Resource	Conditional Probability (%) within 30 days
EI 237, K Platform 49 miles from shore	G35785	C38	Calhoun, TX Matagorda, TX Brazoria, TX Galveston, TX Jefferson, TX Cameron, LA Vermilion, LA Iberia, La St. Mary, LA Terrebonne, LA Lafourche, LA Plaquemines, LA	1 4 2 5 5 16 7 3 1 7 1 2

WCD Scenario - <u>BASED ON WELL BLOWOUT DURING DRILLING OPERATIONS</u> (49 miles from shore) 14,489 bbls of crude oil (Volume considering natural weathering)

14,489 bbls of crude oil (Volume considering natural weathering) API Gravity 34°

FIGURE 2 – Equipment Response Time to EI 237, K Platform

Dispersants/Surveillance

Dispersant/Surveillance	Dispersant Capacity (gal)	Storage Capacity	Persons Req.	From	Hrs to Procure	Hrs to Loadout	Travel to site	Total Hrs
	345.		AS	SI		<i>a</i>		
Basler 67T	2000	NA	2	Houma	2	2	0.5	4.5
DC 3	1200	NA	2	Houma	2	2	0.6	4.6
DC 3	1200	NA	2	Houma	2	2	0.6	4.6
Aero Commander	NA	NA	2	Houma	2	2	0.5	4.5

Offshore Response

Offshore Equipment No Staging	EDRC	Storage Capacity	VOO	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Spill Site	Hrs to Deploy	Total Hrs
CGA											
HOSS Barge	76285	4000	3 Tugs	8	Harvey	7	0	5	7.5	1	20.5
95' FRV	22885	249	NA	4	Venice	2	0	2	6.5	0	10.5
95' FRV	22885	249	NA	4	Leeville	2	0	2	4.5	0	8.5
Boom Barge (CGA-300) 42" Auto Boom (25000')	NA	NA	1 Tug 50 Crew	4 (Barge) 2 (Per Crew)	Leeville	4	0	6	13	2	25

Recovered Oil Storage No Staging	EDRC	Storage Capacity	voo	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Spill Site	Hrs to Deploy	Total Hrs
1100 1000 1100		Ent	erprise Mari	ne Services LI	C (available through	contract with	CGA)				
CTCo 2604	NA	20000	1 Tug	6	Amelia	36.5	12	4	6.5	1	60
CTCo 2605	NA	20000	1 Tug	6	Amelia	36.5	12	4	6.5	1	60
CTCo 2606	NA	20000	1 Tug	6	Amelia	36.5	12	4	6.5	1	60
CTCo 2607	NA	23000	1 Tug	6	Amelia	36.5	12	4	6.5	1	60
CTCo 5001	NA	47000	1 Tug	6	Amelia	36.5	12	4	6.5	1	60

Staging Area: Fourchon

Offshore Equipment With Staging	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Site	Hrs to Deploy	Total Hrs
CGA											
Hydro-Fire Boom	NA	NA	8 Utility	40	Harvey	2	4	3	7.5	6	22.5

Nearshore Response

Nearshore Recovered Oil Storage No Staging	EDRC	Storage Capacity	voo	Persons Required	From	Hrs to Procure	Hrs to Loadout	Hrs to GOM	Travel to Site	Hrs to Deploy	Total Hrs		
CGA													
46' FRV	15257	65	NA	4	Lake Charles	2	0	2	2	0	6		
	Enterprise Marine Services LLC (available through contract with CGA)												
CTCo 2608	NA	23000	1 Tug	6	Amelia	29	12	4	14	1	60		
CTCo 2609	NA	23000	1 Tug	6	Amelia	29	12	4	14	1	60		

Staging Area: Cameron

Near shore and Inland Skimmers With Staging	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
CGA											
SWS Egmopol	1810	100	NA	3	Galveston	2	2	4	2	0	10
SWS Egmopol	1810	100	NA	3	Morgan City	2	2	5.3	2	0	11.3
SWS Marco	3588	20	NA	3	Lake Charles	2	2	1.5	2	0	7.5
SWS Marco	3588	34	NA	3	Leeville	2	2	6.8	2	0	12.8
Rope Mop	77	2	0	3	Harvey	2	2	4	2	0	10


Shoreline Protection


Staging Area: Cameron

18" Shoreline Protection Boom	voo	VOO Persons Storage/Warehouse Req. Location		Hrs to Hrs to Load Procure Out		Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs		
	AMPOL (available through MSA)										
34,050' 18" Boom	13 Crew	26	New Iberia, LA	2	2	3.5	2	12	21.5		

Wildlife Response	EDRC	Storage Capacity	voo	Persons Req.	From	Hrs to Procure	Hrs to Load Out	Travel to Staging	Travel to Deployment	Hrs to Deploy	Total Hrs
	32	* 100 2 2		***************************************	CGA			142 153	38 38 3		0
Wildlife Support Trailer	NA	NA	NA	2	Harvey	2	2	7	1	2	14
Bird Scare Guns (24)	NA	NA	NA	2	Harvey	2	2	7	1	2	14
Bird Scare Guns (12)	NA	NA	NA	2	Galveston	2	2	4	1	2	11
Bird Scare Guns (12)	NA	NA	NA	2	Aransas Pass	2	2	9.9	1	2	16.9
Bird Scare Guns (48)	NA	NA	NA	2	Lake Charles	2	2	1.5	1	2	8.5
Bird Scare Guns (24)	NA	NA	NA	2	Leeville	2	2	6.8	1	2	13.8

Response Asset	Total
Offshore EDRC	122,055
Offshore Recovered Oil Storage	134,498
Nearshore / Shallow Water EDRC	26,130
Nearshore / Shallow Water Recovered Oil Storage	46,321

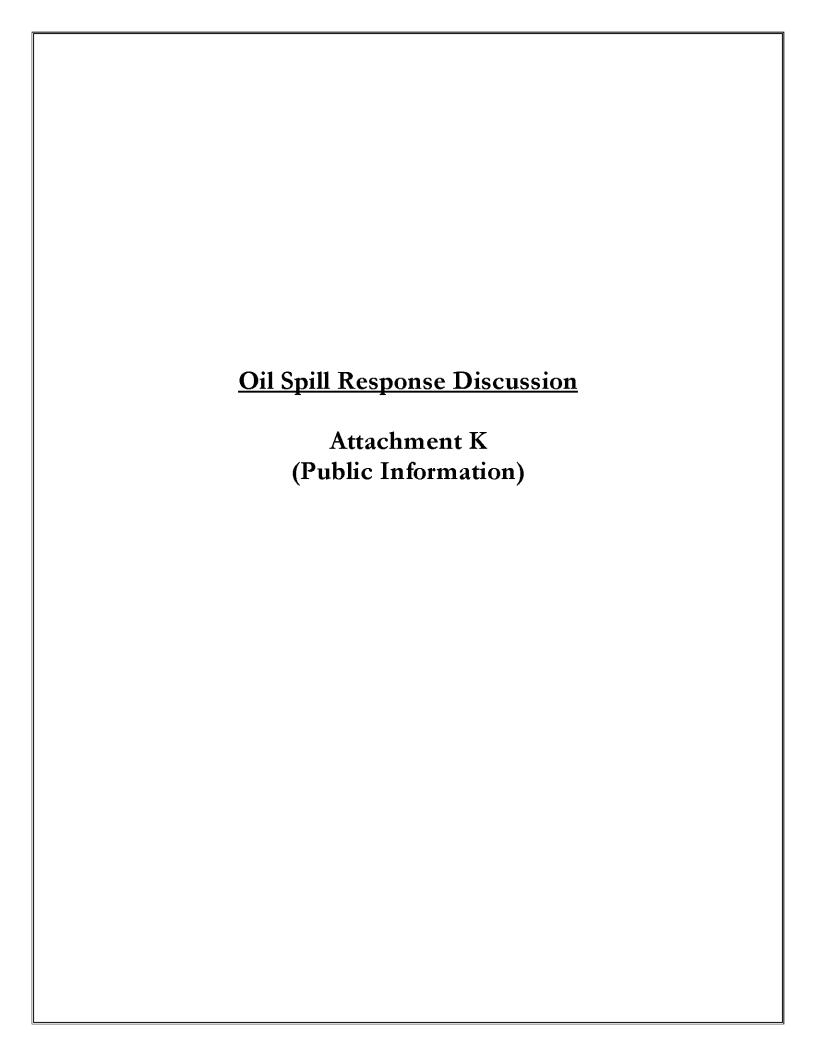

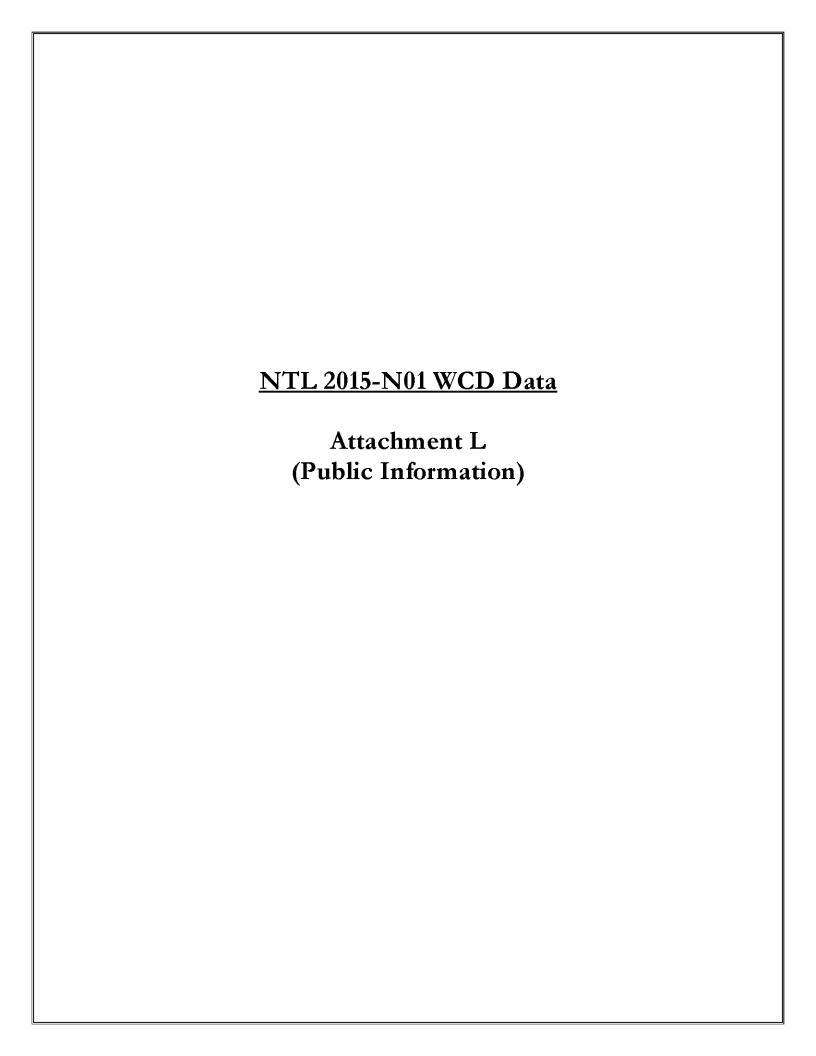



ARENA OFFSHORE

Eugene Island Block 254 OCS-G 36207 KL Prospect WCD Supplemental Information

Discharge Scenario:

- Well Bridging Over The sand that will be encountered in the EI 254 KL is unconsolidated. Productive zones require gravel packs for sand control. All offset D-2 Sand completions were gravel packed. It is anticipated that the severe drawdown resulting from a loss of well control will result in the hole bridging over in a matter of hours.
- Case 2. Conventional Surface Intervention It is assumed that a loss of well control from the surface will result in mobilizing 3rd party well control equipment to the rig. It is assumed that BOP's are compromised, that the rig has not caught fire and is capable of supporting well control efforts with the assistance of a support vessel. As an example, the intervention would consist of top killing the well with kill weight mud or possibly replacing the BOP's with another set to contain flow from the breached equipment.
- Case 3. Relief Well Intervention It is assumed that a rig is immediately available to mobilize to location to commence drilling a relief well. The mobilization and estimated time to drill the relief well is based on offset drilling performance curves.
- Case 4. Relief Well Intervention It is assumed that a rig is not immediately available to mobilize to location to commence drilling a relief well. The estimated time to mobilize a rig incorporates the suspension of activities by an Operator before the rig can be released for relief well operations. The time to drill the relief well is based on offset drilling performance curves.

Timeline for each worst case discharge scenario:

Well Bridging Over:

Case 1.

<1 day Case 2. Conventional Surface Intervention: Assess well condition: 2 days

Mobilize 3rd party equipment: 2 days Contain discharge: 10 days Total: 14 days

Case 3. Relief Well Intervention (Rig Immediately Available):

> Assess well condition: 2 days Mobilize rig: 3 days Drill relief well: 40 days Total: 45 days

Case 4. Relief Well Intervention (Rig Not Immediately Available):

> Assess well condition: 2 days Suspend current operations: 10 days Mobilize rig: 3 days Drill relief well: 40 days Total: 55 days

Relief Well Rig Availability:

• It is planned to drill the EI 254 KL using an independent or mat cantilever jackup rig. The EI 237 "K" Platform was installed during 2006 in 139' of water. There are 7 jackup rigs currently marketed in the Gulf of Mexico that are capable of drilling an open water relief well to the EI 237 "K" Platform location. These are described in Table 1.

TABLE 1:

U.S. GULF OF MEXICO RIG UTILIZATION AND DAY RATES February 10, 2017

		U,S. GUL		uary 10, 2017	AND DAY RATES			•
RIGLOG	X			y,				
			RIGS		CONTRACTED		WORKING	WORKING
	TOTAL		CONTRACTED/		UTILIZATION	RIGS	UTILIZATION	UTILIZATION
RIG TYPE	SUPPLY	SUPPLY	COMMITTED	(TOTAL FLEET)	(MKTD FLEET)	WORKING	(TOTAL FLEET)	MKTD FLEET)
Jackup - Workover	1	1	1	100.0%	100.0%	1	100.0%	100.0%
Jackup - < 200'	2	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 200'-MC	5	1	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 225'-MS	1	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 250'-IC	3	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 250'-MC	2	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 250'-S	3	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 300'-C	7	1	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 350'-IC	3	2	2	66.7%	100.0%	2	66.7%	100.0%
Jackup - 350'-IS	1	0	0	0.0%	0.0%	0	0.0%	0.0%
Jackup - 375-400'-IC	6	2	2	33.3%	100.0%	2	33.3%	100.0%
Jackup - 401' +	1	1	1	100.0%	100.0%	1	100.0%	100.0%
TOTAL JACKUPS	35	8	6	17.1%	75.0%	6	17.1%	75.0%



ARENA OFFSHORE

Eugene Island Block 254 OCS-G 36207 KL Prospect WCD Supplemental Information

Blowout Prevention Measures:

The purpose of this document is to describe measures that Arena Offshore will take to enhance its ability to prevent a blowout, to reduce the likelihood of a blowout, and to conduct effective and early intervention in the event of a blowout from the EI 254 KL well.

Blowout Prevention:

The following measures will be taken in an attempt to ensure that the EI 254 KL is kept under control at all times:

- An Arena Offshore onsite representative will witness and review all BOP tests, casing tests and formation integrity tests.
- An Arena Offshore Superintendent in the office will review all FIT tests prior to moving forward with drilling operations.
- Prior to commencing cementing operations on any casing string, a minimum of 1½ bottoms up will be circulated with drilling mud, so long as full returns are maintained, in order enhance the ability of achieving a successful cement job.
- A liner top packer, in addition to cement, will be utilized in order to ensure the pressure integrity of the liner lap of any liner run in the well.
- All production casing strings will be centralized across hydrocarbon bearing zones in order to ensure the proper isolation of individual pay sands by cementation and to prevent the transmission of hydrocarbons up the annulus behind the production casing.
- The proposed well will be drilled on a mud weight schedule utilizing extensive offset data from offset wells in the field. Proposed drilling mud weights will allow for at a minimum, the known hydrostatic pressures required to drill the known hydrocarbon zones encountered in the original development of the field.
- Lost circulation material in the form of properly distributed particle sized mud additives
 (PSDs) will be added to the mud system in the form of sweeps while drilling both the
 intermediate and production hole sections. PSD additives will be utilized to prevent
 uncontrolled mud losses in the case that lower than anticipated pore pressures or fracture
 gradients are encountered.
- Wiper trips will be performed as hole conditions dictate in order to quantify the stability of
 the wellbore and determine if sufficient mud weights are being utilized to prevent influx of
 formation fluids, prevent swabbing of wellbore fluids while pulling pipe and prevent losses
 of wellbore fluids to the formation.


- Connections will be simulated while drilling into pressure transition areas in order to properly assess the current wellbore conditions.
- Mudloggers may be utilized during the drilling of the well in order to specifically evaluate wellbore conditions including, but not limited to weights of returning drilling fluids as compared to that of the fluid entering the hole, gas content of mud returns, formation characteristics and abnormalities of cuttings and estimated paleo aging of cuttings.
- Logging while drilling tools (LWD) will be utilized to evaluate and estimate lithology, formation pressures and fluid content from surface casing point to wellbore total depth. This will enable the real time identification of any changes in anticipated formation pressures and assist in the picking of intermediate casing points and wellbore total depth, potentially eliminating the possibility of drilling into unexpected formations that could cause dangerous well control situations. Log data will be regularly provided to the office for evaluation.
- Pressure While Drilling (PWD) data will be utilized to ensure the stability of, and to maintain constant monitoring of hydrostatic pressures applied to, the wellbore.


Blowout Intervention:


In the event of an uncontrolled flow of hydrocarbons from the EI 254 KL wellbore, the Oil Spill Response Plan (OSRP) as described in the DOCD will be activated. In addition to the activation of this plan two scenarios of well intervention have been described in the attached documentation and current availability of equipment to enact both well intervention scenarios identified:

- Assuming in an uncontrolled flow situation, the MODU is intact and not sufficiently damaged, along with the KL wellbore and surface equipment, wellbore intervention would be performed from the MODU itself, or a barge mobilized nearby. Master Service Agreements (MSAs) have been established with Cudd Pressure Control and Wild Well Control in order to expedite response in the case of an uncontrolled flow situation. As an example, flow could be controlled from either a "top kill" method or from the removal of the surface BOP stack and subsequent replacement of the stack and the wellbore shut in.
- In the event that the MODU and/or the KL wellbore is irreparably damaged during a blowout scenario, wellbore intervention would be performed by contracting an additional MODU, mobilizing it to location and the subsequent spudding and drilling of a relief well. Arena Offshore currently has in place established contracts with all contractors that operate jack-up rigs in the Gulf of Mexico. Such contracts would be utilized to expedite the contracting of a rig in order to drill a relief well.

In the case of an uncontrolled flow of hydrocarbons, Arena Offshore will simultaneously pursue multiple wellbore intervention methods in an attempt to mitigate and terminate the spill, until the wellbore is brought under control.

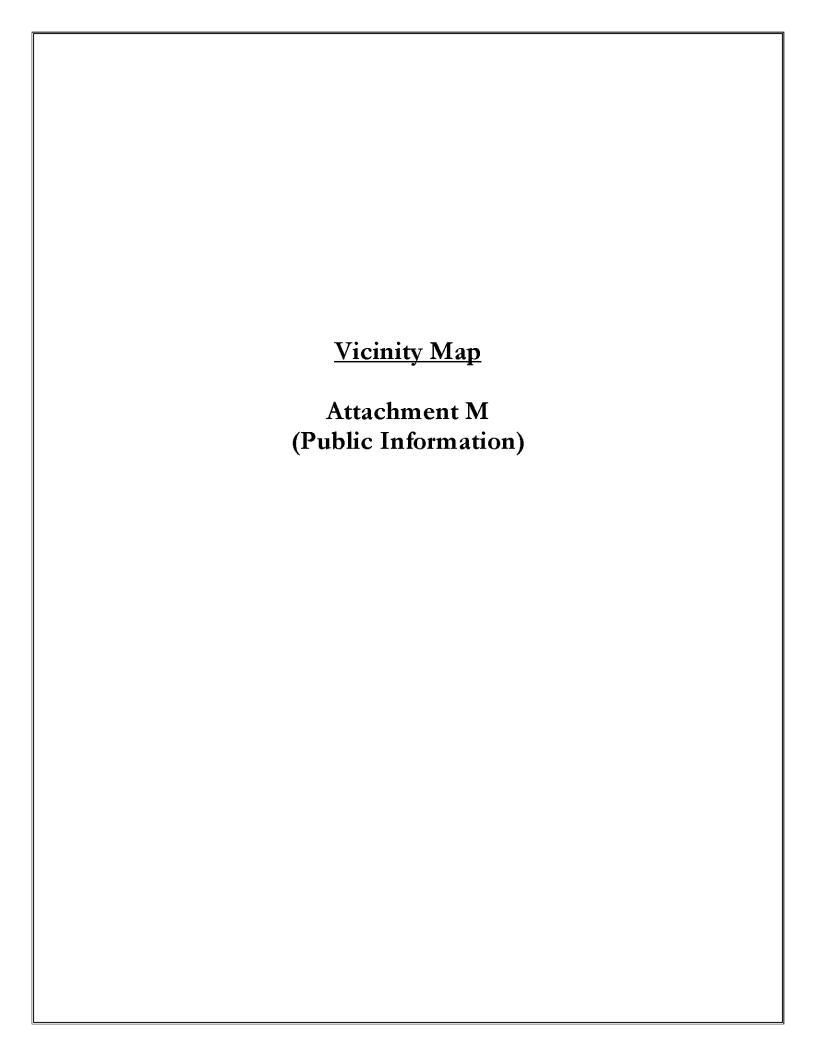

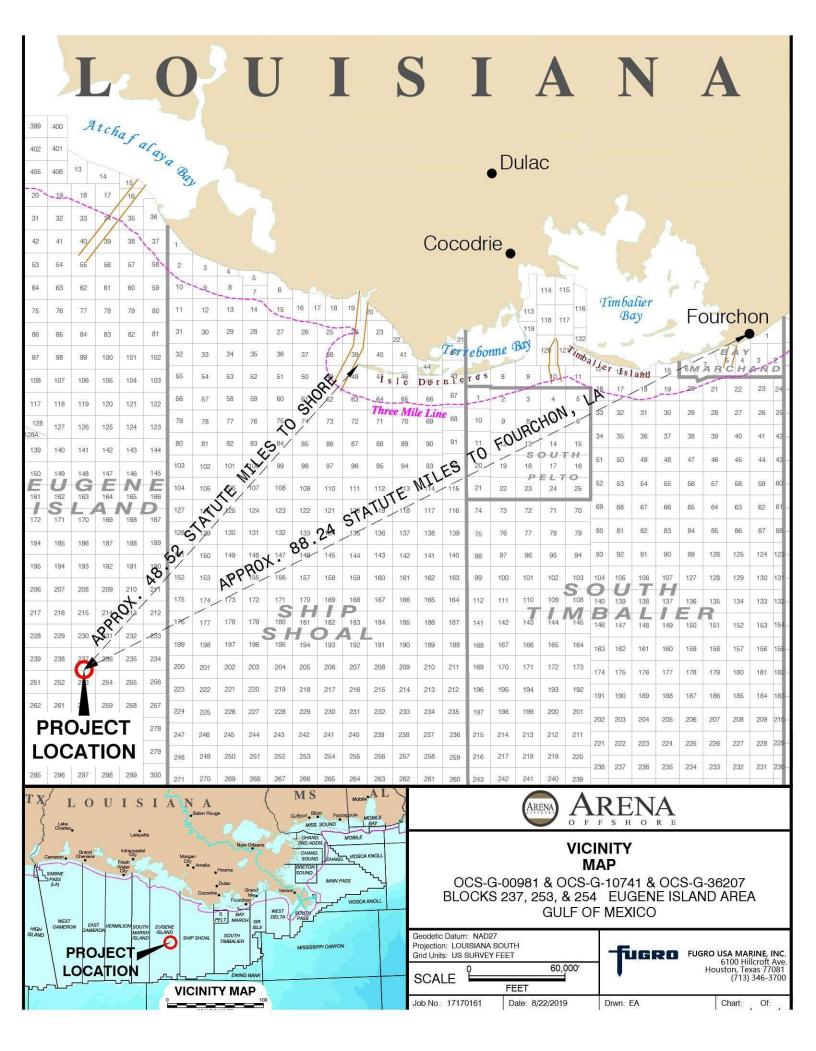

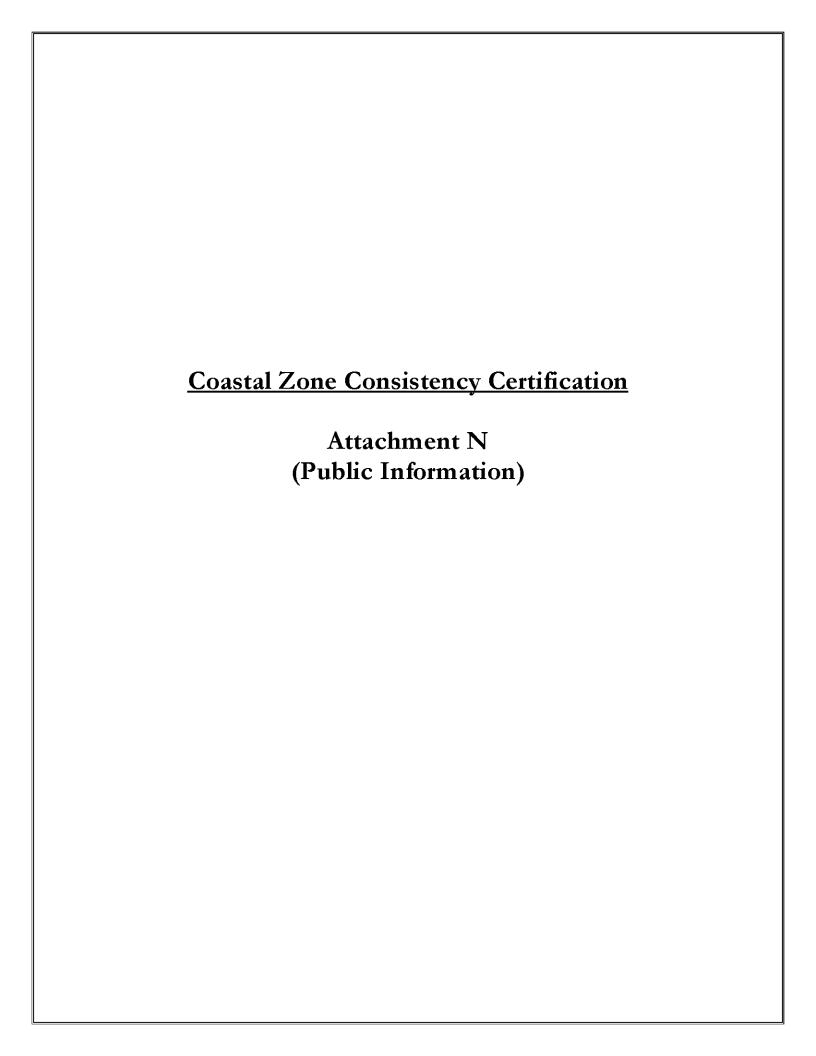

COASTAL ZONE MANAGEMENT CONSISTENCY CERTIFICATION

JOINT INITIAL AND REVISED DEVELOPMENT OPERATIONS COORDINATION DOCUMENT

EUGENE ISLAND BLOCK 237/253/254 LEASES OCS-G 00981/G 10741/G 36207

The proposed activities described in detail in the enclosed Plan comply with Louisiana's approved Coastal Zone Management Program and will be conducted in a manner consistent with such Program.

By:	Arena Offshore, LP	
Signed By:	Mumer inleady	
Dated:	28 October 2819	