



TYPICAL 6" DRIVE PIPE VALVE (+10')

PLAN VIEW

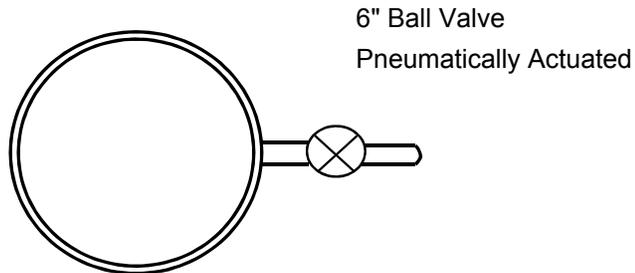

ELEVATION VIEW

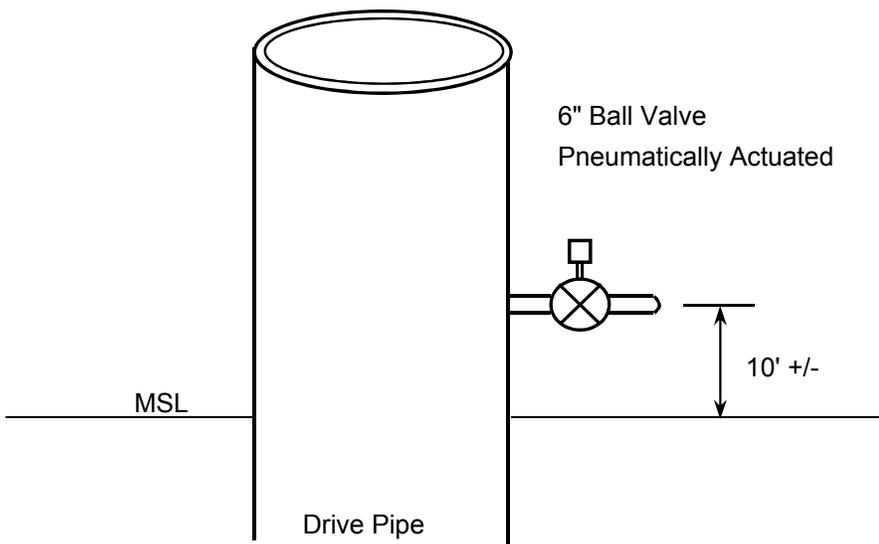

NOTE: The +10' valve is to be used to reduce hydrostatic pressure while drilling the conductor hole in the case of lost returns. In addition, this valve is to be used for maintaining returns in the final stages of the conductor cement job. The valve is to remain closed at all other times. While the valve is in use, discharges from the valve will be continuously monitored by an individual having direct communication with the driller.