


Typical 6" Ball Valve Hook-Up

Valve is used to reduce hydrostatic during primary cementing.

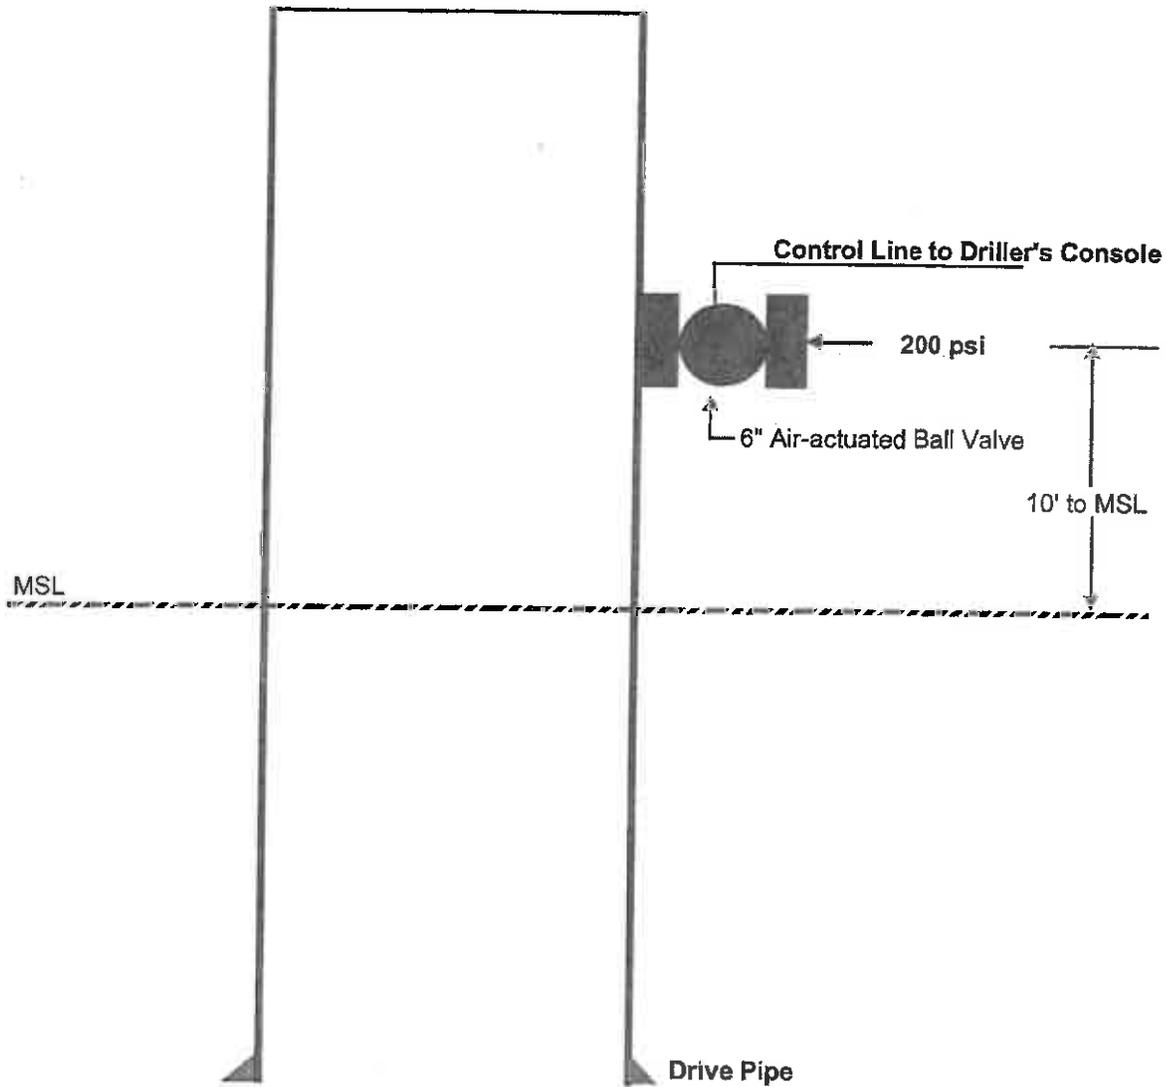

Valve is removed and companion flange is bull plugged after cementing conductor casing and nipping up BOP's. Monitoring of operations and communication with driller will be continuous while valve is in use.